


μPC1225H 30~50W驱动放大器(双电源)12脚单列直插式塑封

日 电

是双电源工作的功放级的驱动放大器，由电压放大、前置驱动和保护电路构成。

- 工作电源电压范围 $\pm 18 \sim \pm 36\text{V}$
- 功放管的 h_{FE} 50(m:n) (最大输出时的 h_{FE})
- 电源加入或关断时的喀嚓声小


方框图

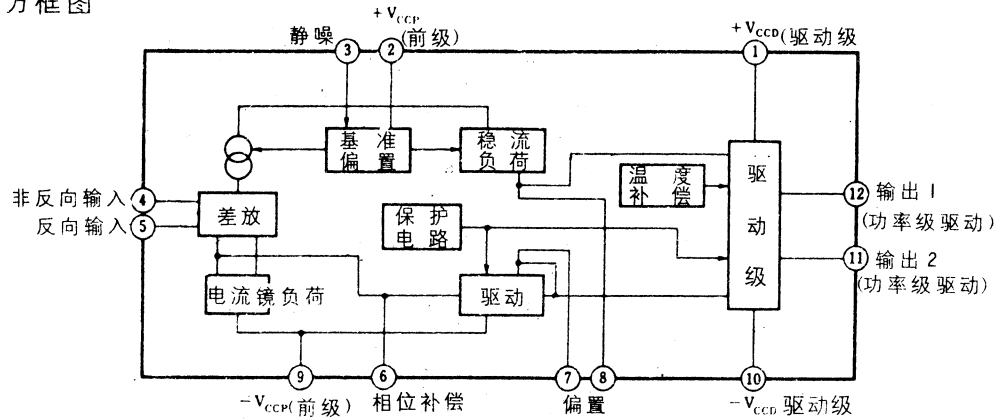

极限参数 ($T_a = 25^\circ\text{C}$)

- V_{CC} $\pm 50\text{V}$ (无信号时)
 $\pm 45\text{V}$ (工作时)
 - $I_{CC(\text{peak})}$ 200mA
 - P_T 4.1W^*
 - T_{opt} $20 \sim +75^\circ\text{C}$
 - T_{stg} $-40 \sim +150^\circ\text{C}$
- * $T_a = 75^\circ\text{C}$, 使用铝散热片 $100 \times 100 \times 1\text{mm}$

应用电路例

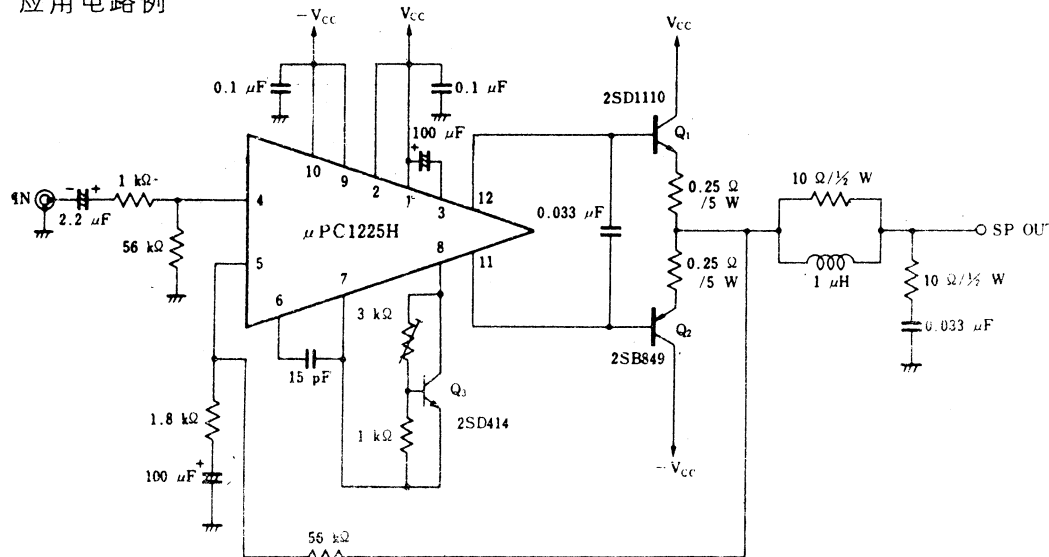

电特性参数 ($V_{CC} = \pm 36\text{V}$, $G_V = 30\text{dB}$, $T_a = 25^\circ\text{C}$)

符号	测定条件	参数值			单位
		最小	典型	最大	
$I_{CC(2S)}$	$V_i = 0$		20	40	mA
V_{OO}	$V_i = 0$		± 5	± 100	mV
G_{VC}	$V_O = 1.5\text{V}$, $f = 1\text{kHz}$	80	95		dB
V_{OM}	$KF = 0.05\%$, $f = 20\text{Hz} \sim 20\text{kHz}$	20	23		V
N_O	$R_s = 10\text{k}\Omega$		0.07	0.14	mV
BW	$V_O = 1.5\text{V}$, -3dB		900		kHz
SVR	$R_s = 2\text{k}\Omega$, $f = 100\text{Hz}$	55	70		dB
静噪接通时 输出 补偿电压	$V_{CC} = \pm 50\text{V}$			$\pm 50^*$	mV

* : μPC1270H(仅指此型号)

μPC1225H

30-50 W POWER AMPLIFIER DRIVER

T-74-05-01


DESCRIPTION

μPC1225H is designed for use with a HI-FI power amplifier driver. It is composed of a differential amplifier, a pre driver, a driver and protection circuit.
 It is in a 12 pin small power SIP. (Single In Line)

FEATURES

- Excellent Low Distortion
 0.002 % TYP. ($V_{CC} = \pm 36 V$, $f = 1 kHz$, $A_v = 30 dB$, $P_o = 30 W$, $R_L = 8 Ohms$)
 0.006 % TYP. ($V_{CC} = \pm 36 V$, $f = 20 kHz$, $A_v = 30 dB$, $P_o = 30 W$, $R_L = 8 Ohms$)
- Wide Frequency Band
 900 kHz TYP. (-3 dB)
- Wide Power Band Width
 90 kHz TYP. ($P_o = 25 W$, T.H.D. = 0.1 %)
- Excellent Low POP ON/OFF Noise

BLOCK DIAGRAM

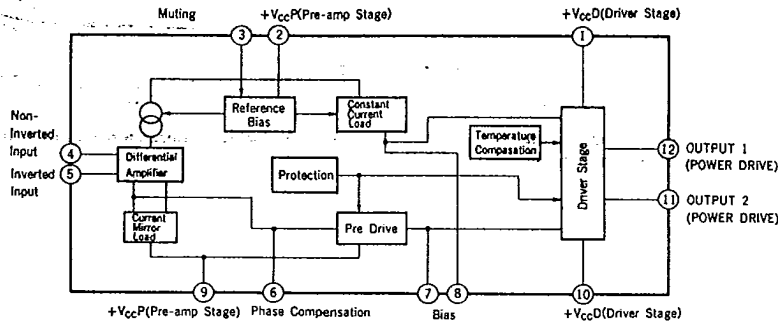

NOTE: The protection circuit is for this IC and cannot protect external Power Transistors. Thus, design a P_o Tr protection circuit besides.

6427525 N E C ELECTRONICS INC

μ PC1225H
05E 22727 D

T-74-05-01

ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

Supply Voltage (Quiescent)	V _{CC1}	±50	V
Supply Voltage (Operational)	V _{CC2}	±45	V
Quiescent Circuit Current	I _{CC}	200	mA
Allowable Package Dissipation	I _{CC(PEAK)}	4.1	W
Operational Temperature	T _{opt}	-20 to +75	°C
Storage Temperature	T _{stg}	-40 to +150	°C

RECOMMENDED OPERATING CONDITION

Supply Voltage (Operational)	V _{CC} = ±18 to ±36 V at Max Power Output
Input Bias Resistance	R _{IN} = 1 to 50 to 100 kohms
Power Transistor h _{FE}	h _{FE} = 50 at Max Power Output
Closed Loop Voltage Gain	A _V = 26 to 30 dB

ELECTRICAL CHARACTERISTICS (V_{CC} = ±36 V, A_V = 30 dB, Use Standard Test Circuit, Ta = 25 °C)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITION
Output Offset Voltage	V _{OFF}		±5	±100	mV	SEE TEST CIRCUIT 1
Quiescent Circuit Current	I _{CC}		20	40	mA	V _{IN} = 0
Maximum Output Voltage	V _{OM}	20	23		V	T.H.D. = 0.05 % f = 20 to 20 kHz
Open Loop Voltage Gain	A _{VO}	80	95		dB	V _O = 1.5 V, f = 1 kHz
Output Noise Voltage	V _{NO}		0.07	0.14	mV	R _G = 10 kohms
Power Band Width	P.B.W.		900		kHz	V _O = 1.5 V, -3 dB
Supply Voltage Rejection Ratio	S.V.R.	55	70		dB	R _G = 2 kohms, f = 100 Hz


5

6427525 N E C ELECTRONICS INC


μ PC1225H
05E 22729 D

T-74-05-01

TEST CIRCUIT 1 (V_{OFF})

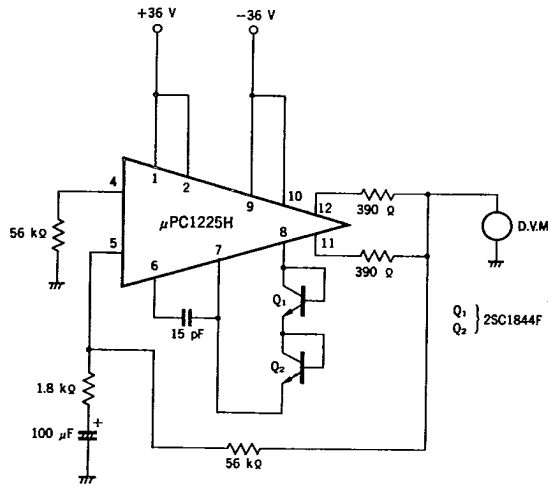

TEST CIRCUIT 2 (I_{CC})

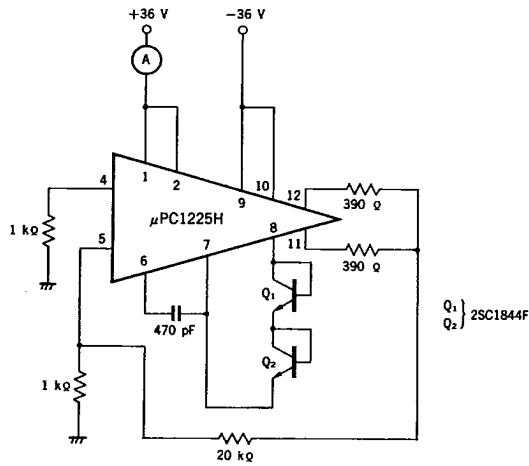

5


μPC1225H

6427525 N E C ELECTRONICS INC


05E 22730 D

TEST CIRCUIT 3 (V_{OM})

T-74-05-01

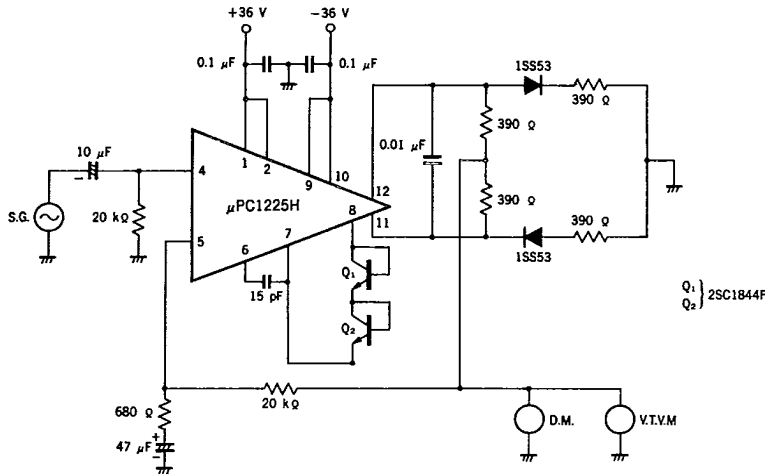

TEST CIRCUIT 4 (A_{VO})

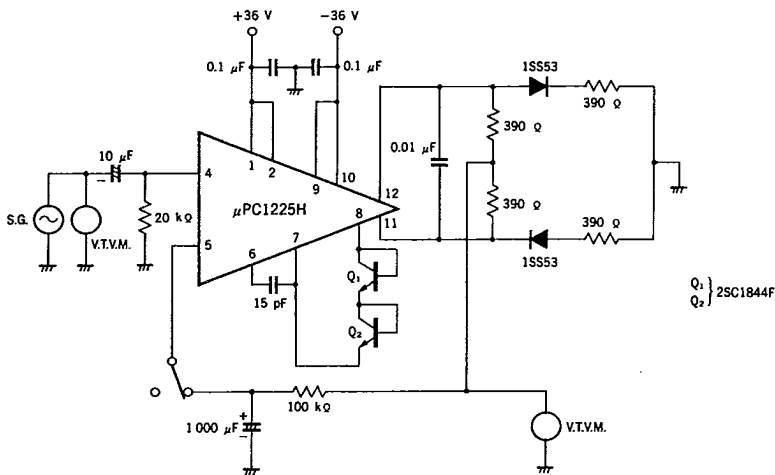


6427525 N E C ELECTRONICS INC


μ PC1225H
05E 22731 D

TEST CIRCUIT 5 (V_{No})

T-74-05-01

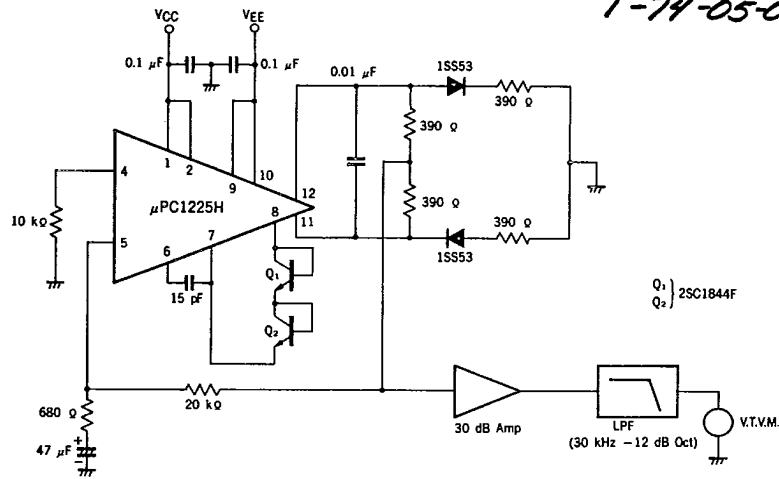

TEST CIRCUIT 6 (S.V.R.)

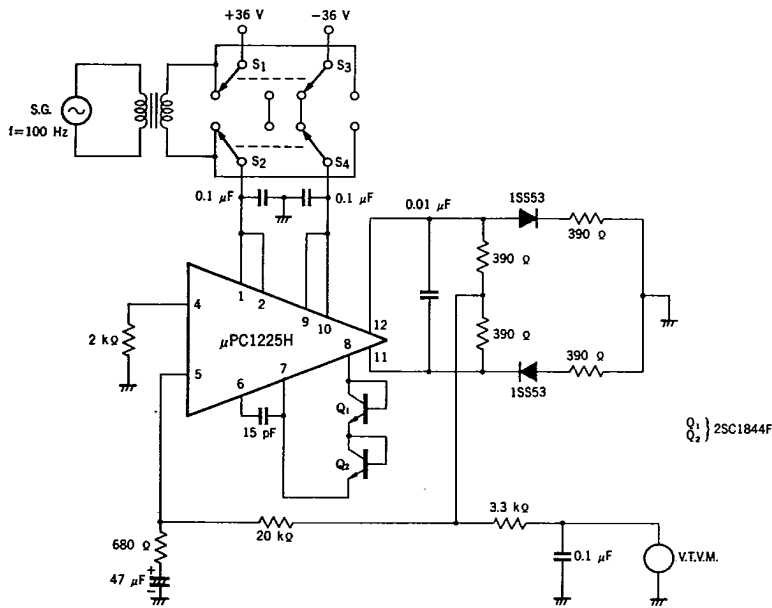


5

μPC1225H
 6427525 N E C ELECTRONICS INC


05E 22732 D

TYPICAL APPLICATION CIRCUIT

T-74-05-01

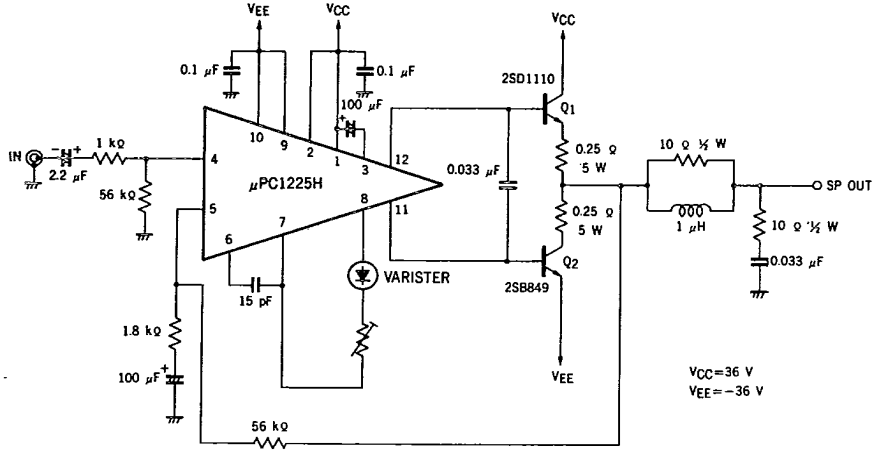


VCC=36 V
 VEE=-36 V

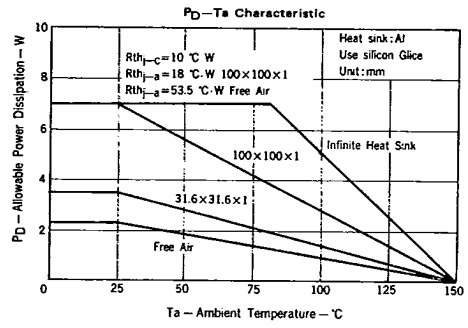


6427525 N E C ELECTRONICS INC

μ PC1225H
05E 22733 D


T-74-05-01

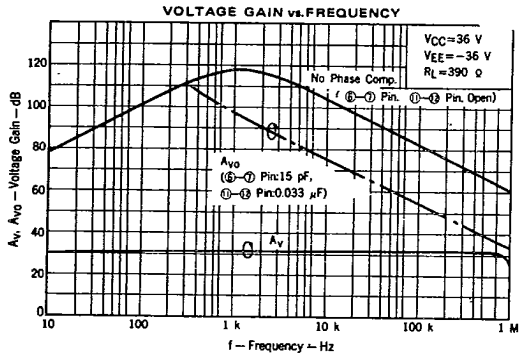

OPEN LOOP VOLTAGE GAIN
SUPPLY VOLTAGE REJECTION RATIO
OUTPUT NOISE VOLTAGE
CIRCUIT CURRENT
OUTPUT OFFSET VOLTAGE
vs. SUPPLY VOLTAGE

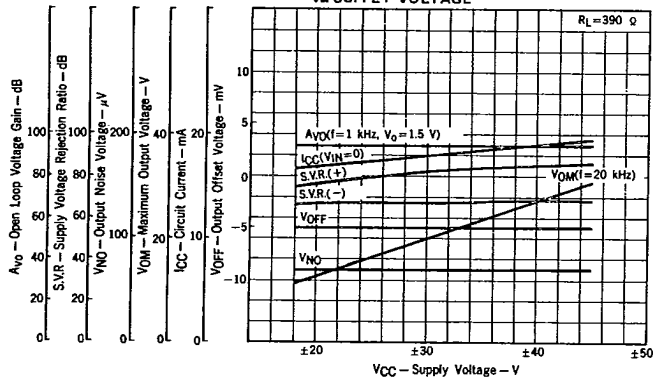

OUTPUT NOISE VOLTAGE
vs. SOURCE RESISTANCE



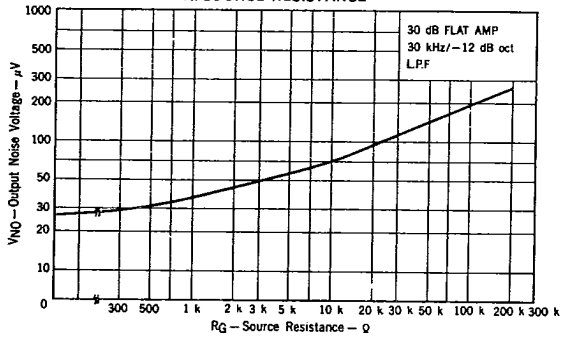


5

μ PC1225H
6427525 N E C ELECTRONICS INC

05E 22734 D


T-74-05-01

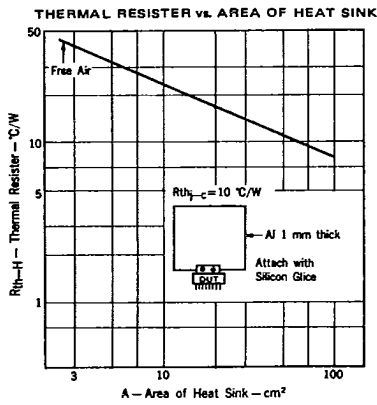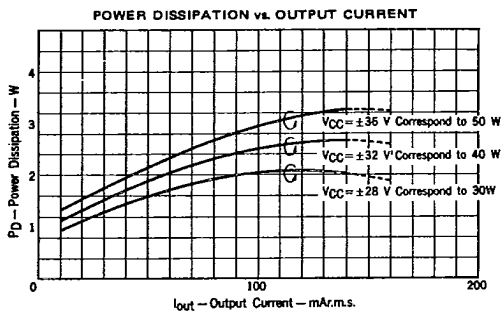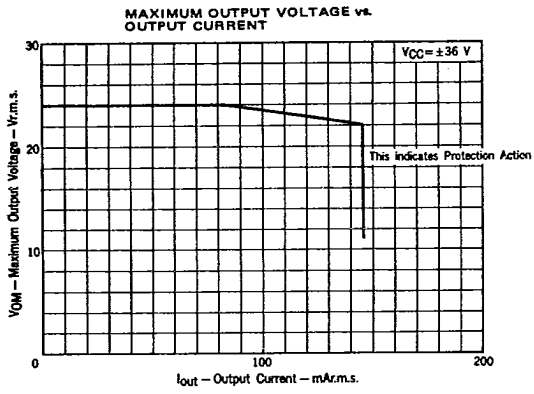

6427525 N E C ELECTRONICS INC

μ PC1225H
05E 22735 D
7-74-05-01

μ PC1225H/ μ PC1237H/MP-80 EVALUATION CIRCUIT



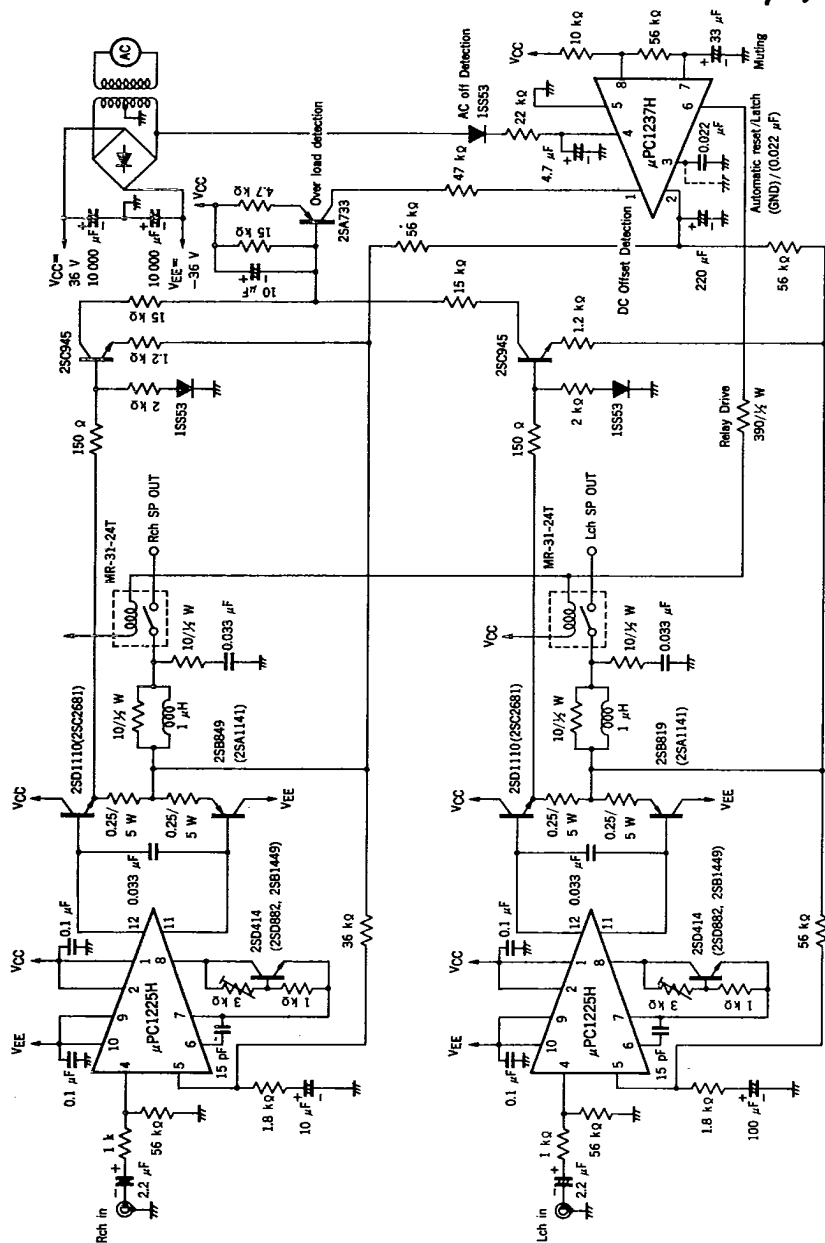


Note: Attach 25D414 on P₀ Tr Heat Sink.
Attach A1 Heat Sink, which is larger than 80 mm X 60 mm X 1 mm, with μ PC1225H.

6427525 N E C ELECTRONICS INC

μ PC1225H
 05E 22737 D

T-74-05-01


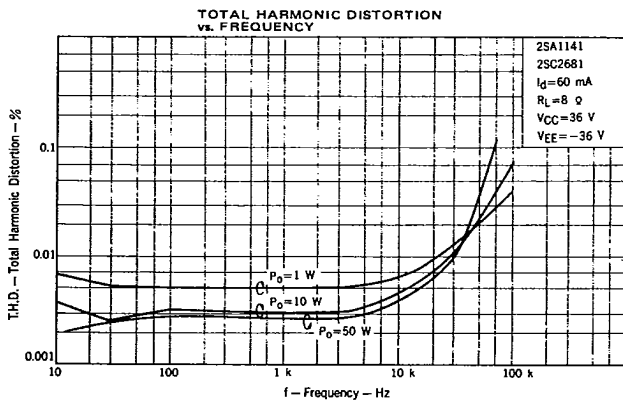
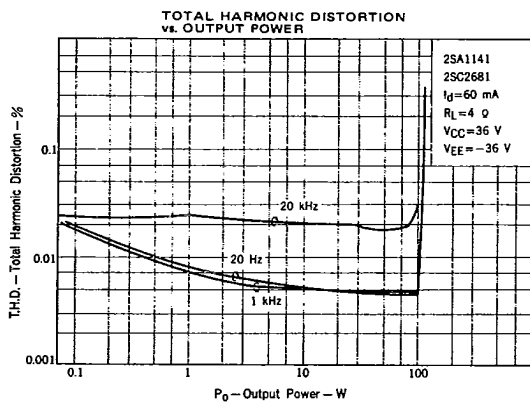
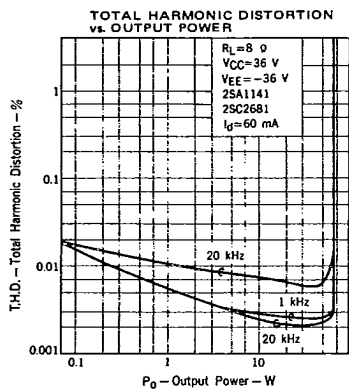


5

μ PC1225H
 6427525 N E C ELECTRONICS INC

05E 22738 D

T-74-05-01

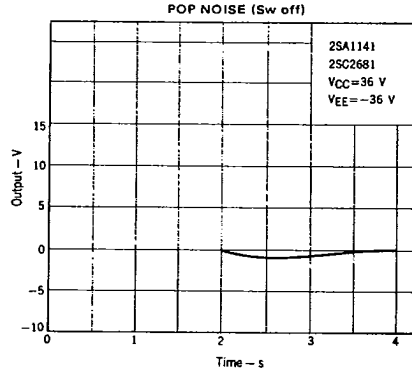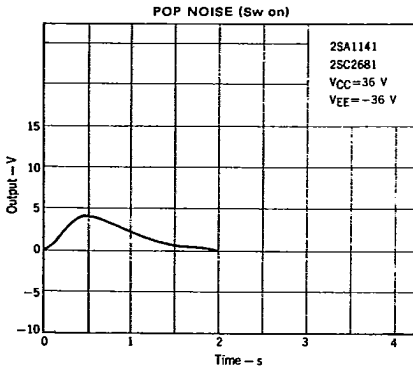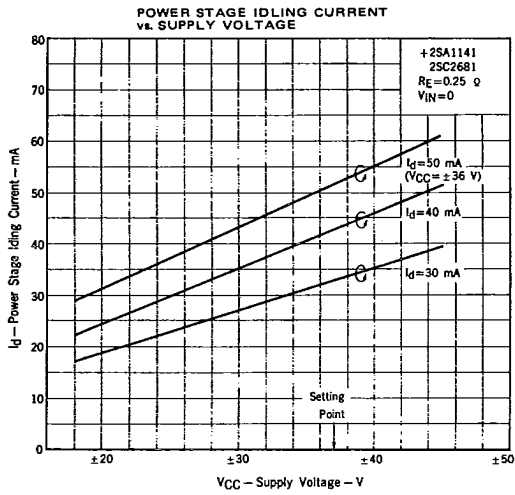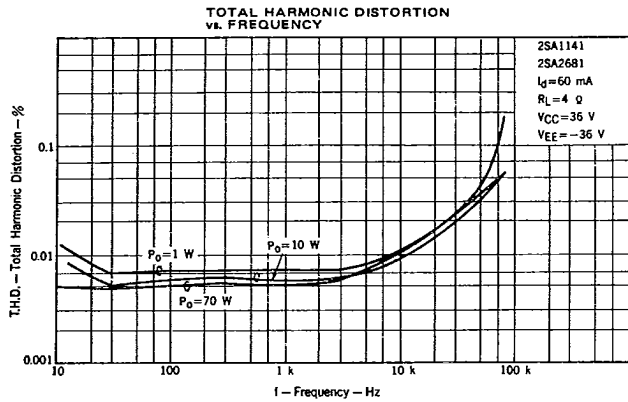

6427525 N E C ELECTRONICS INC

μ PC1225H
05E 22739 D

T-74-05-01

APPLICATION CIRCUIT

(1) Design Specification

a. Pre amplifier stage (equalizer amplifier)

Supply Voltage $V_{cc} = \pm 22$ V

Input equivalent Noise Voltage $V_{NL} = 0.815 \mu\text{Vr.m.s. TYP.}$

Phono Allowable Input Level 222 mVr.m.s. TYP. (T.H.D.=0.1 %, f=1 kHz)

b. Power amplifier stage

Supply Voltage $V_{cc} = \pm 36$ V

Load impedance $R_L = 8 \Omega$

Continuous Output Power $P_o = 50$ W (T.H.D.=0.1 %)

Voltage Gain (at flat state) $A_v = 43$ dB

Input Sensitivity $V_{in} = 142$ Vr.m.s.

Range of Varying Voltage gain 100 Hz ± 10 dB
10 kHz ± 10 dB

(2) Description

μ PC1224H is chosen as EQ amplifier. The internal circuit of this IC is composed of two differential amplifiers as voltage amplifier stage and SEPP output circuit. Thus, this IC is available for flat amplifier and tone control amplifier.

Power amplifier stage is composed of NFB tone control amplifier using μ PC1225H. This power driver IC is also available for flat amplifier. And μ PC1237H is chosen as a protector.

5

μPC1225H
 6427525 N E C ELECTRONICS INC

05E 22740 D —

T-74-05-01

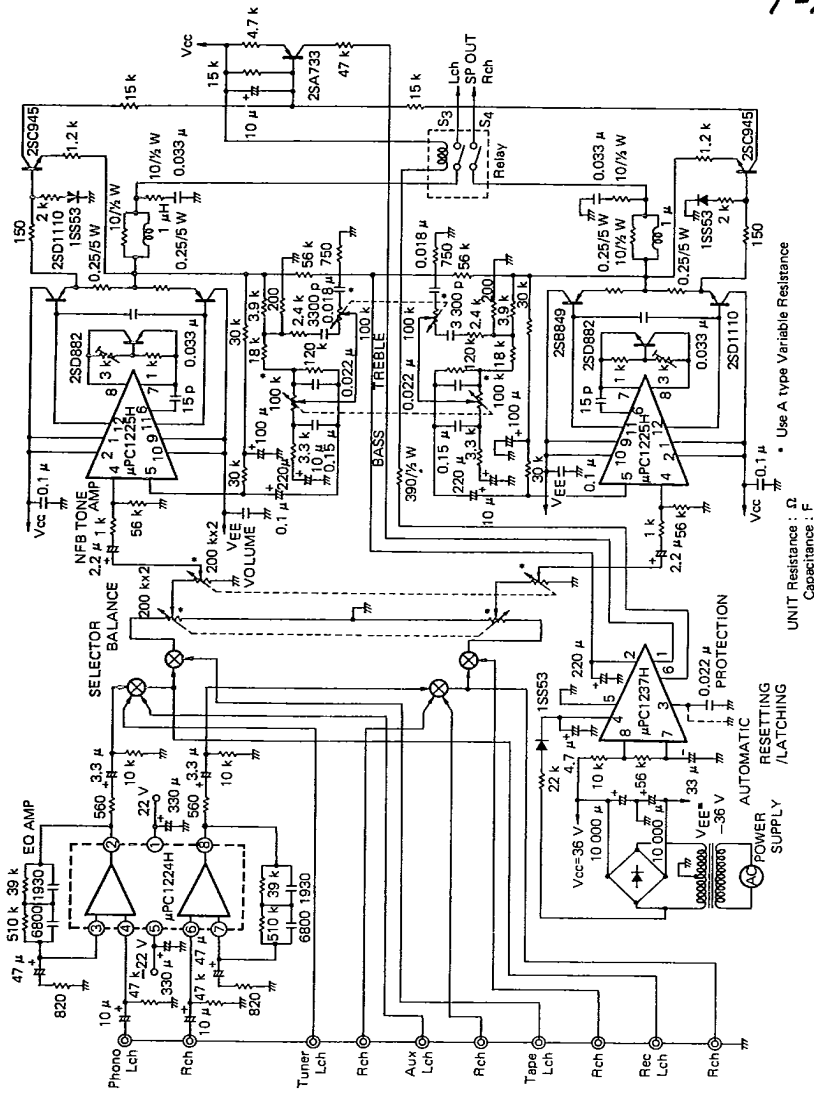


Fig. 1 50 W PRE-MAIN AMPLIFIER APPLICATION CIRCUIT

6427525 N E C ELECTRONICS INC

μ PC1225H
05E 22741 D

(3) Characteristic of Power Amplifier Circuit

T-74-05-01

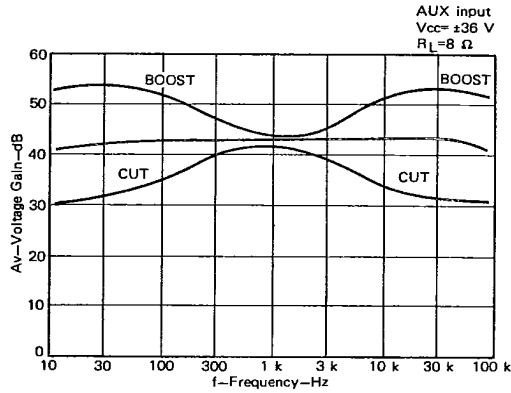


Fig. 2 VOLTAGE GAIN vs. FREQUENCY

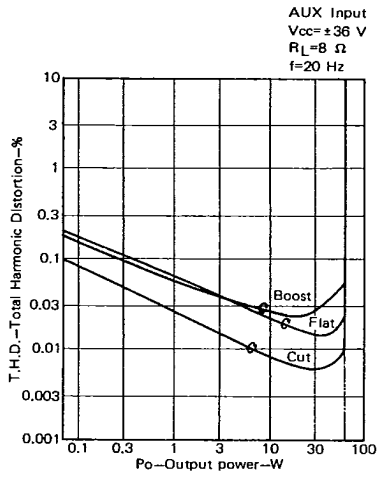


Fig. 3 TOTAL HARMONIC DISTORTION vs. OUTPUT POWER

5

μPC1225H

6427525 N E C ELECTRONICS INC

05E 22742 D —

T-74-05-01

AUX Input
V_{cc} = ±36 V
R_L = 8 Ω
f = 1 kHz

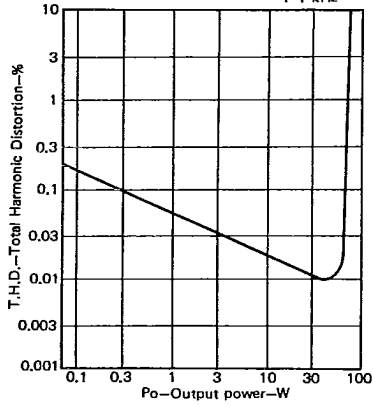


Fig. 4 TOTAL HARMONIC DISTORTION vs. OUTPUT POWER

AUX Input
V_{cc} = ±36 V
R_L = 8 Ω
f = 20 kHz

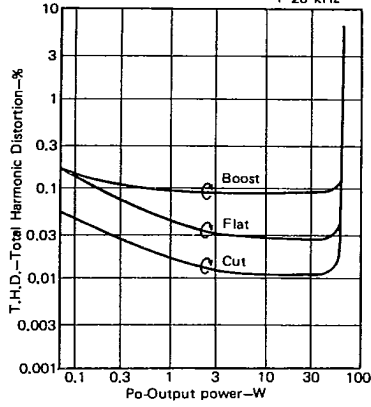


Fig. 5 TOTAL HARMONIC DISTORTION vs. OUTPUT POWER