


3/8" [9.52mm] Sq. Wirewound Trimmers

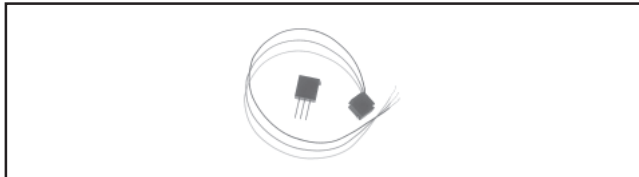

FEATURES

- Precious metal wiper.
- 1.0 watt to + 85°C.
- TCR ± 50PPM/°C.
- Solderable leads.
- Military quality at affordable prices.

APPLICATIONS

Wirewound trimmers are particularly useful in those applications where any combination of high power, low temperature coefficient of resistance and/or excellent long term life stability are important design considerations.

ELECTRICAL SPECIFICATIONS

Electrical Travel: 22 ± 4 turns.

Resistance Range: 10 ohms to 10 kilohms. Extended range available in non MIL-Spec product.

Resistance Tolerance: ± 5% standard. Closer tolerances available.

Temperature Coefficient: (- 65°C to + 150°C) ± 50PPM/°C.

Power Rating: 1.0 watt at + 85°C derated to 0 watt at + 150°C. These specifications exceed MIL-Spec.

End Resistance: 1 ohm or 2%, whichever is greater.

Equivalent Noise Resistance (ENR): 100 ohms maximum.

Dielectric (DWV): 1000 VAC at atmospheric pressure.

These specifications exceed MIL-Spec.

Insulation Resistance: >100,000 Megohms (500 VDC).

These specifications exceed MIL-Spec.

MECHANICAL SPECIFICATIONS

Operating Torque: 5 ounce inch maximum.

Rotation: Clutch stop, wiper idles.

Weight: 0.935 grams maximum.

Resistive Element: Nickel chromium.

Rotational Life: 200 cycles minimum.

Terminal Strength: 2 pounds for 10 seconds.

ENVIRONMENTAL SPECIFICATIONS

Temperature Limits: - 65°C to + 150°C.

Sealing: Fully sealed case (non-hermetic).

STANDARD RESISTANCE VALUES

RESISTANCE* (Ohms)	NOMINAL RESOLUTION (%)
10	1.10
20	.85
50	.65
100	.51
200	.40
500	.45
1k	.34
2k	.27
5k	.20
10k	.16
20k	.13
25k	.12
35k	.11
50k	.10


*Other resistances available upon request.

CIRCUIT DIAGRAM





DIMENSIONAL CONFIGURATIONS 3/8" [9.52mm] Square [Numbers in brackets indicate millimeters]

L Lead Style - 117^S

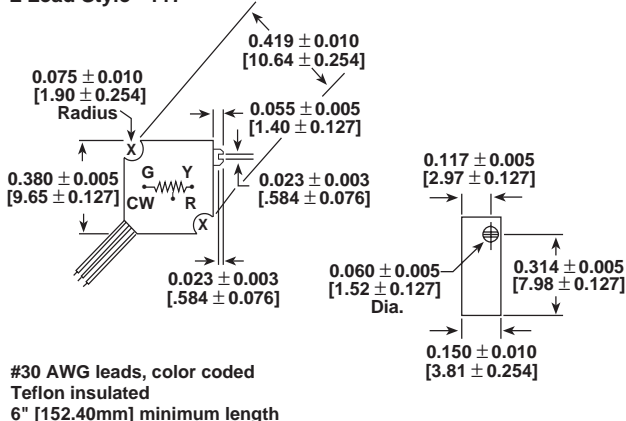

P Lead Style - 126^S

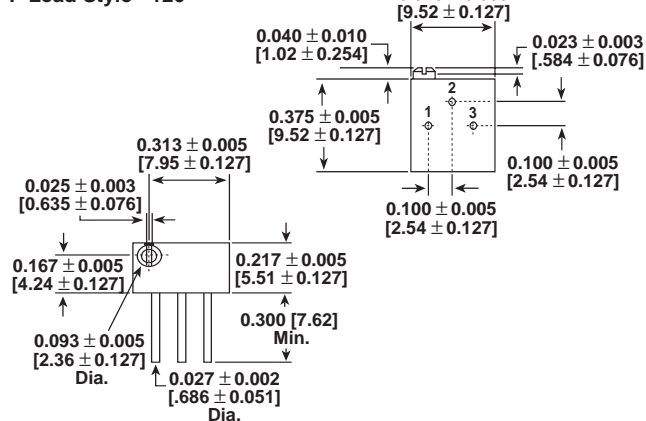

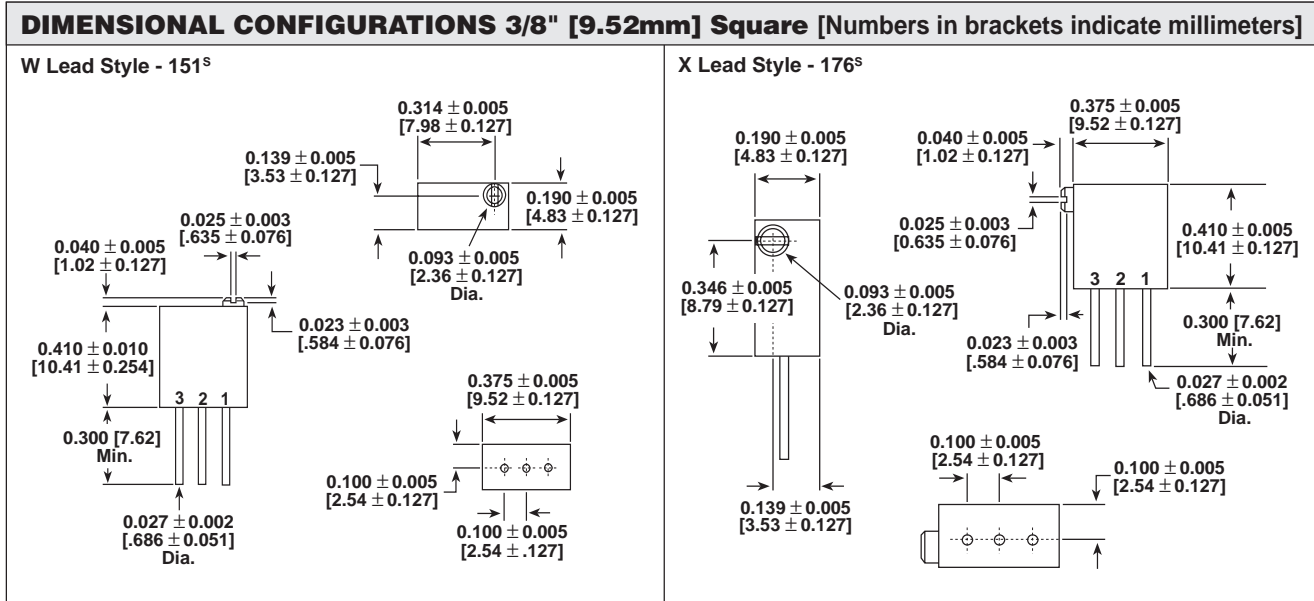


ENVIRONMENTAL PERFORMANCE				
TEST ¹		CONDITIONS	MIL-PRF-39015 REQUIREMENT	TYPICAL CHANGE
Power Conditioning	(108)	50 hours at 1 watt at + 25°C	$\Delta R \leq 0.5\%^2$	$\Delta R < 0.08\%$
Thermal Shock	(107)	5 cycles, -55°C to + 125°C	$\Delta R \leq 1.0\%^2$	$\Delta R < 0.07\%$
Low Temperature Storage		72 hours, no load at - 65°C	$\Delta R \leq 1.0\%^2$	$\Delta R < 0.05\%$
Low Temperature Operation		1 hour storage, 45 minutes rated power at - 55°C	$\Delta R \leq 1.0\%^{2,3}$	$\Delta R < 0.08\%$
High Temperature Exposure		1000 hours, no load at + 150°C	$\Delta R \leq 1.0\%^{2,3}$	$\Delta R < 0.03\%$
Moisture Resistance	(106)	480 hours at rated power with humidity ranging from 80% RH to 98% RH	$\Delta R \leq 1.0\%^2$	$\Delta R < 0.22\%$
Resistance to Soldering Heat	(210)	+ 350°C for 3 seconds	$\Delta R \leq 1.0\%^2$	$\Delta R < 0.02\%$
Shock	(213)	18 shocks, 100g, 6 ms, sawtooth, 3 axes	$\Delta R \leq 1.0\%^{2,3}$	$\Delta R < 0.27\%$
Vibration	(204)	10 to 2000 Hz, 20g, 12 hours, 3 axes	$\Delta R \leq 1.0\%^{2,3}$	$\Delta R < 0.04\%$
Rotational Life		200 cycles	$\Delta R \leq 2.0\%$	$\Delta R < 0.06\%$
Load Life	(108)	10,000 hours at rated power at + 85°C	$\Delta R \leq 3.0\%$	$\Delta R < 0.23\%$

¹Numbers in parenthesis refer to test method MIL-STD-202 as modified by the detail specification.

²For values below 100 ohms, add 0.05 ohm to the allowable change.

³The referenced tests also require that setting stability change shall not exceed ± 0.05 percent plus the specified maximum resolution.

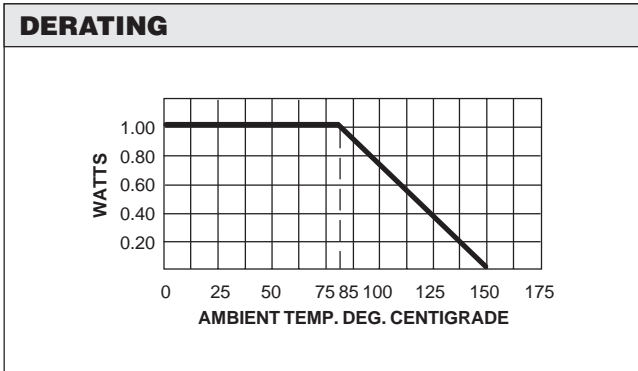

HOW TO ORDER

117^S
MODEL

117^S = Teflon Leadwire
126^S = PC Mount
151^S = Top Adjustment Screw
176^S = Side Adjustment Screw

501
VALUE

First two digits are significant figures. Last digit specifies number of zeros to follow.