

# Digitally Programmable 8 to 25 Multiplex LCD Controller & Driver

### Description

The EM6124 is a low power CMOS LCD controller and driver. The 8, 16, 20 and 24 way multiplex are digitally programmable by the command byte. One additional line can be added for Icons or Inverted Video by programming 9, 17, 21 or 25 way multiplex. The display refresh is handled on chip by an internal RC oscillator via one selectable 25 x 116 RAM which holds the LCD content driven by the driver. LCD pixels (or segments) are addressed on a one to one basis with the 25 x 116 bit RAM (a set bit corresponds to an activated LCD pixel). The EM6124 has very low dynamic current consumption, typically 70  $\mu$ A at  $V_{DD} = 2$  V,  $V_{LCD} = 7$  V making it particularly attractive for portable and battery powered products. The wide operating range on supply voltages and temperature offers much application flexibility. The LCD voltage, bias generation and frame frequency are generated on chip. The clock signal can be used to shift and to latch the data into the RAM.

### Applications

- Mobile phones (GSM, DECT)
- Smart cards
- Automotive displays
- Portable, battery operated products
- Balances and scales, utility meters

### Features

- Slim IC for chip-on-board, with gold bumps for Chip-On-Glass and Chip-On-Flex technologies
- Very simple 2-wire interface
- Digitally programmable multiplex rates: 8 x 113, 9 x 112, 16 x 105, 17 x 104, 20 x 101, 21 x 100, 24 x 97, 25 x 96
- No lost pads while row driver from 8 up to 25
- On chip: Voltage multiplier,  $V_{LCD}$  up to 7 V (3 to 6 V at 25  $^{\circ}$ C), 64  $V_{LCD}$  digitally programming steps, 4  $V_{LCD}$  temperature compensation factors, bias generation,  $V_{ON} / V_{OFF}$  generation, frame frequency, display refresh RAM
- No busy state
- High noise immunity in inputs
- No external components needed, except a  $V_{LCD}$  capacitor
- Digitally reversing row data
- Digitally reversing column data
- Inverting data function
- Blank function
- Set function
- Checker and Inverted Checker functions
- Sleep modes
- Low LCD operating current consumption
- Wide  $V_{DD}$  voltage supply range, 2 to 5 V
- Wide temperature range: -40 to + 85  $^{\circ}$ C
- Direct display of RAM data through the display data RAM

(To cascade ICs, please see Fig. 19 and contact EM Microelectronic-Marín S.A.)

### Typical Operating Configuration


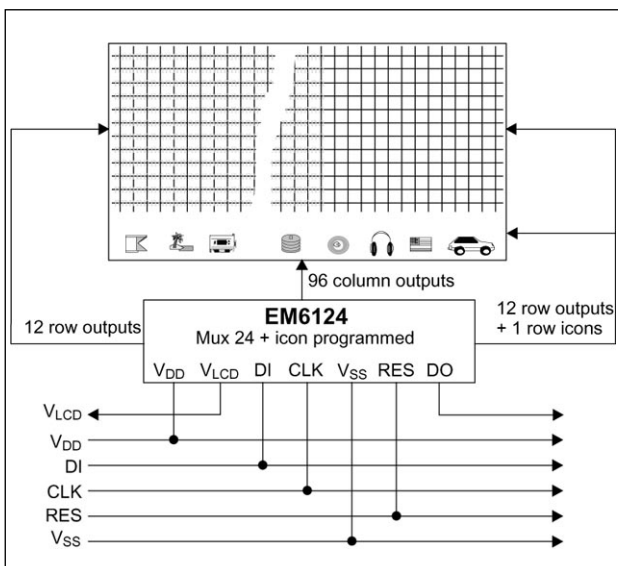



Fig. 1

### Pad Assignment

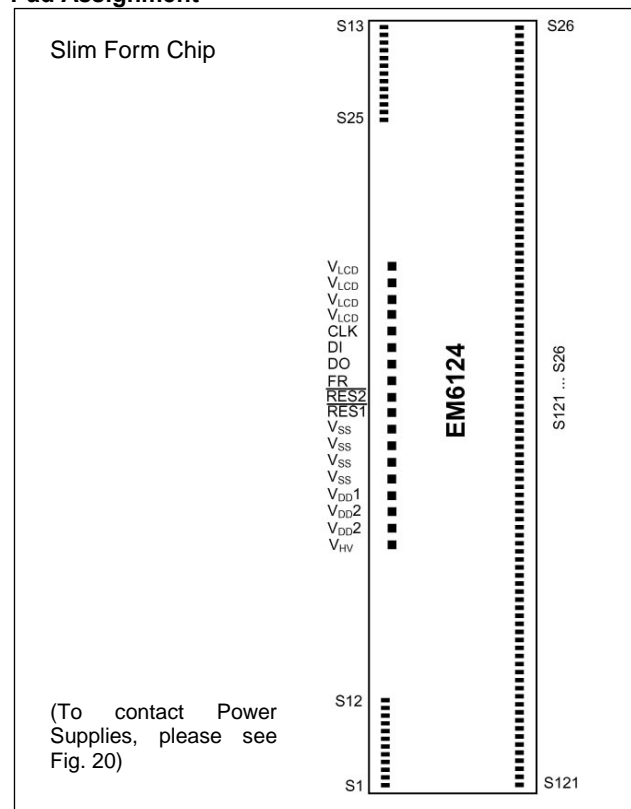

(To contact Power Supplies, please see Fig. 20)

Fig. 2



## Absolute Maximum Ratings

| Parameter   | Symbol             | Conditions                      |
|---|--------------------|---------------------------------|
| Supply voltage range  | V <sub>DD1,2</sub> | -0.3V to 6V                     |
| Supply high voltage range   | V <sub>HV</sub>    | -0.3V to 6V                     |
| Internal generated V <sub>LCD</sub>   | V <sub>LCD</sub>   | 7V                              |
| Voltage at DI, DO, CLK, FR, RES   | V <sub>LOGIC</sub> | -0.3V to V <sub>DD</sub> +0.3V  |
| Voltage at S1 to S121   | V <sub>DISP</sub>  | -0.3V to V <sub>LCD</sub> +0.3V |
| Storage temperature range   | T <sub>STO</sub>   | -65 to +150°C                   |
| Electrostatic discharge max. to MIL-STD-883C method 3015.7 with ref. to V <sub>SS</sub> | V <sub>Smax</sub>  | 1000V                           |
| Maximum soldering conditions  | T <sub>Smax</sub>  | 250°C x 10s                     |

Stresses above these listed maximum ratings may cause permanent damages to the device. Exposure beyond specified operating conditions may affect device reliability or cause malfunction.

## Electrical Characteristics

V<sub>DD1</sub> = V<sub>DD2</sub> = 3V, V<sub>HV</sub> = 2.5 to 5V and T<sub>A</sub> = -40 to +85°C, unless otherwise specified

| Parameter                                      | Symbol                | Test Conditions                             | Min.                   | Typ.      | Max.                   | Units |
|--|-----------------------|---|------------------------|-----------|------------------------|-------|
| Standby supply current                         | I <sub>DD</sub>       | See note 1                                  |                        | 16        | 22                     | μA    |
| Standby supply current                         | I <sub>HV</sub>       | See note 1, V <sub>LCD</sub> step 30 (hexa) |                        | 65        | 170                    | μA    |
| Dynamic supply current                         | I <sub>DD</sub>       | See note 2                                  |                        | 57        | 75                     | μA    |
| Standby supply current                         | I <sub>HV</sub>       | See note 3, V <sub>LCD</sub> Step 00 (hexa) |                        | 35        | 140                    | μA    |
| Sleep mode supply current                      | I <sub>DD</sub>       |   |                        | 0.1       |                        | μA    |
| Sleep mode supply current                      | I <sub>HV</sub>       |   |                        | 0.1       |                        | μA    |
| <b>Control Signals DI, CLK, FR, RES1, RES2</b> |                       |   |                        |           |                        |       |
| Input leakage                                  | I <sub>IN</sub>       | V <sub>DD1,2</sub> or V <sub>SS</sub>       | -1                     |           | 1                      | μA    |
| Input capacitance                              | C <sub>IN</sub>       | at T <sub>A</sub> = 25°C                    |                        | 8         |                        | pF    |
| Low level input voltage                        | V <sub>IL</sub>       |   | 0                      |           | 0.3 V <sub>DD1,2</sub> | V     |
| High level input voltage                       | V <sub>IH</sub>       |   | 0.7 V <sub>DD1,2</sub> |           | V <sub>DD1,2</sub>     | V     |
| DC output component                            | ±VDC                  | See table 4                                 |                        | 30        | 100                    | mV    |
| V <sub>LCD</sub> (internally generated)        | V <sub>LCD</sub>      | See note 4                                  |                        | 6.15      |                        | V     |
| V <sub>LCD</sub>                               | V <sub>LCD</sub>      | See note 5                                  |                        | 3.15-7.09 |                        | V     |
|  | V <sub>LCD</sub> step |   |                        | 62.5      |                        | mV    |

Table 3

**Note 1:** All outputs open, DI and CLK at V<sub>SS</sub>, mux ratio = 24, checker pattern.

**Note 2:** All outputs open, DI at V<sub>SS</sub>, f<sub>CLK</sub> = 1 MHz, mux ratio = 24, checker pattern.

**Note 3:** DI and CLK at V<sub>SS</sub>, checker pattern, mux ratio = 8.

**Note 4:** Initialization bits 18 to 23 = 110000 and initialization bits 10, 11 = 00; laser trimming on request.

**Note 5:** Initialization bits 18 to 23 = 000000/111111.

## DC Output Component

| Output        | Frame | Logic Data | Measured*                         | Guaranteed   |
|---------------|-------|------------|-----------------------------------|--|
| Row Driver    | n     | 0L         | V <sub>LCD</sub> - V <sub>2</sub> | V <sub>1</sub> = 0.83 x V <sub>LCD</sub> ± 100 mV<br>V <sub>2</sub> = 0.66 x V <sub>LCD</sub> ± 100 mV |
|               | n + 1 | 0L         | V <sub>4</sub> - V <sub>SS</sub>  |  |
| Column Driver | n     | 0L         | V <sub>LCD</sub> - V <sub>2</sub> | V <sub>3</sub> = 0.34 x V <sub>LCD</sub> ± 100 mV<br>V <sub>4</sub> = 0.17 x V <sub>LCD</sub> ± 100 mV |
|               | n + 1 | 0L         | V <sub>3</sub> - V <sub>SS</sub>  |  |

Table 4

$$*V_x = \frac{V_x(\text{load} = +1\mu\text{A}) + V_x(\text{load} = -1\mu\text{A})}{2}, \text{ mux 24 or 25 programmed, VLCD} = 6\text{V, TA} = 25^\circ\text{C}$$

Test is performed for multiplex rate = 25. All multiplex rate ≠ 25 are guaranteed by design. If multiplex rate ≠ 25, test will be performed on request.



# EM6124

## Timing Characteristics

$V_{DD1} = V_{DD2} = 2$  to  $3V$ ,  $V_{HV} = 2.5$  to  $5V$  and  $T_A = -40$  to  $+85^\circ C$

| Parameter                     | Symbol            | Test Conditions | Min. | Typ. | Max. | Units   |
|-------------------------------|-------------------|-----------------|------|------|------|---------|
| Clock high pulse width        | $t_{CH}$          |                 | 70   |      |      | ns      |
| Clock low pulse width         | $t_{CL}$          |                 | 110  |      |      | ns      |
| Clock period                  | $t_{per}$         |                 | 550  |      |      | ns      |
| Reset1 pulse width            | $t_{RES1}$        |                 | 10   |      |      | $\mu s$ |
| Reset2 pulse width            | $t_{RES2}$        |                 | 130  |      |      | ns      |
| Clock and FR rise time        | $t_{CR}$          |                 |      |      | 200  | ns      |
| Clock and RF fall time        | $t_{CF}$          |                 |      |      | 200  | ns      |
| Data input setup time         | $t_{DS}$          |                 | 20   |      |      | ns      |
| Data input hold time          | $t_{DH}$          |                 | 260  |      |      | ns      |
| FR (internal frame frequency) | $f_{FR}$ (note 1) |                 |      | 75   |      | Hz      |

Table 5a

**Note 1:** EM6124 (n), FR = n times the desired LCD refresh rate where n is the EM6124 mux mode number; laser trimming on request  
See Fig. 17.01 and 17.02 for more details concerning the frame frequency

$V_{DD1} = V_{DD2} = 3$  to  $5V$ ,  $V_{HV} = 2.5$  to  $5V$  and  $T_A = -40$  to  $+85^\circ C$

| Parameter                     | Symbol            | Test Conditions | Min. | Typ. | Max. | Units   |
|-------------------------------|-------------------|-----------------|------|------|------|---------|
| Clock high pulse width        | $t_{CH}$          |                 | 50   |      |      | ns      |
| Clock low pulse width         | $t_{CL}$          |                 | 55   |      |      | ns      |
| Clock period                  | $t_{per}$         |                 | 350  |      |      | ns      |
| Reset1 pulse width            | $t_{RES1}$        |                 | 10   |      |      | $\mu s$ |
| Reset2 pulse width            | $t_{RES2}$        |                 | 80   |      |      | ns      |
| Clock and FR rise time        | $t_{CR}$          |                 |      |      | 200  | ns      |
| Clock and RF fall time        | $t_{CF}$          |                 |      |      | 200  | ns      |
| Data input setup time         | $t_{DS}$          |                 | 20   |      |      | ns      |
| Data input hold time          | $t_{DH}$          |                 | 140  |      |      | ns      |
| FR (internal frame frequency) | $f_{FR}$ (note 1) |                 |      | 75   |      | Hz      |

Table 5b

**Note 1:** EM6124 (n), FR = n times the desired LCD refresh rate where n is the EM6124 mux mode number; laser trimming on request

## Timing Waveforms

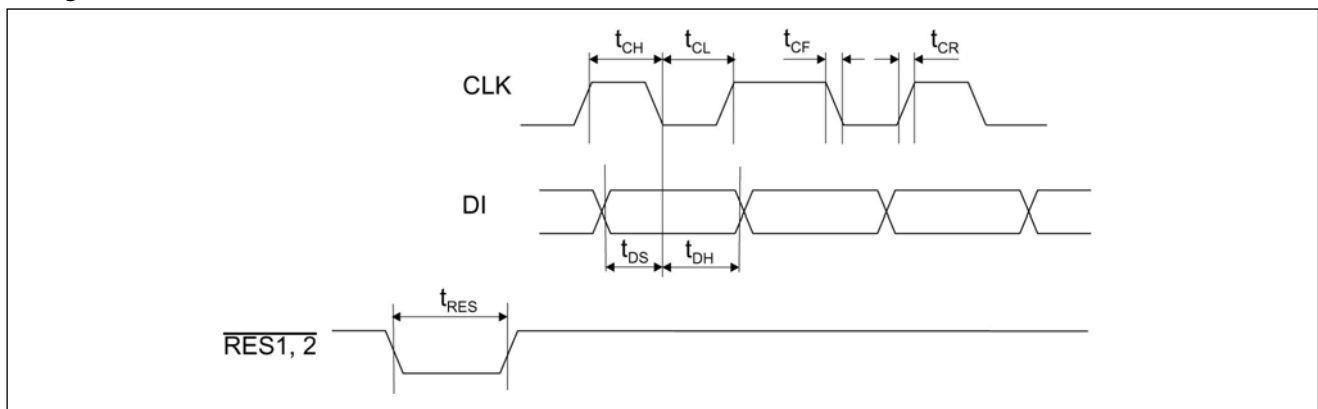


Fig. 3



## 1 Bit Interface Description

This 1 bit interface is very simple to use. There are three modes to load data into the EM6124.

### Command byte only mode

To validate this mode, 8 bits must be shifted with bit 3 to bit 7 set to 1L. This mode is used for blank, set or sleep mode functions.

### Command byte and initialization mode

To validate this mode, 32 bits must be shifted with bit 0 and bit 1 set to 1L. Bit 2 (sleep) can be active or inactive. Bit 3 to bit 7 (RAM address) can be in any state but it is important that they are not all simultaneously set to 1L, otherwise the chip will be in command byte only mode.

#### Command byte and display information mode

To validate this mode, 128 bits must be shifted, eight first bits are for command byte, all the other are RAM data depending of col bit mode and multiplex ratio. There are also x bits don't care in each loading depending on the programming of the chip (see Fig. 4 for more details).

In each RAM's data loading, the command byte has to be introduced for the RAM address. Before loading any data into the RAM the chip has to be initialized.

## Command Byte

| Command Bits 0 to 7 |     |       |             |   |   |   |   |  |
|---------------------|-----|-------|-------------|---|---|---|---|--|
| 0                   | 1   | 2     | 3           | 4 | 5 | 6 | 7 |  |
| Blank               | Set | Sleep | RAM address |   |   |   |   |  |

Table 6

**Cmdbit 0:** Blank bit forces all column outputs off.

**Cmdbit 1:** Set bit forces all column output on.

Note: If bit 0 and bit 1 are both to 1L, the chip will be in initialization mode. See remarks below.

**Cmdbit 2:** Sleep mode bit, stops the voltage booster and the internal oscillator, active bit col forces all outputs to V<sub>SS</sub>.

**Cmdbits 3-7:** RAM address bits. See table 6.

If Cmdbits 3-7 are set to 1L, EM6124 is in Cmd byte only mode.

## Initialization Bits

| Initialization Bits 8 to 15  |         |              |        |         |              |        |         |
|------------------------------|---------|--------------|--------|---------|--------------|--------|---------|
| 8                            | 9       | 10           | 11     | 12      | 13           | 14     | 15      |
| Mux Mode                     |         | Temp. Coeff. |        | Checker | Inv. Checker | Col    | Inv.Row |
| Initialization Bits 16 to 23 |         |              |        |         |              |        |         |
| 16                           | 17      | 18           | 19     | 20      | 21           | 22     | 23      |
| M/LSB                        | Video   | Step 1       | Step 2 | Step 3  | Step 4       | Step 5 | Step 6  |
| Initialization Bits 24 to 31 |         |              |        |         |              |        |         |
| 24                           | 25      | 26           | 27     | 28      | 29           | 30     | 31      |
| Icon                         | Sleep 2 | Test 6       | Test 5 | Test 4  | Test 3       | Test 2 | Fr_ext  |

Table 7

| Mux ratio (Init. bit 8, 9) |   |          |
|----------------------------|---|----------|
| 8                          | 9 | mux mode |
| 0                          | 0 | 8        |
| 0                          | 1 | 16       |
| 1                          | 0 | 20       |
| 1                          | 1 | 24       |

Table 8

**Init.bit 8-9:** Mux mode bits. The multiplex ratio is selected by these two bits. Table 8 shows the corresponding values.

**Init.bit 10-11:** V<sub>LCD</sub> temperature coefficient is selected by these two bits. Table 11 shows the corresponding values.

**Init.bit 12:** Checker bit gives the possibility to force all outputs segments in checked form (see Fig. 10 and Fig. 18.14).

**Init.bit 13:** Inverse Checker bit gives the possibility to force all outputs segments in inverse checked form (see Fig. 10 and Fig. 18.15).

**Init.bit 14:** Col bit configures the EM6124 on row and column driver or column driver only. In this mode the frame frequency must be external.

**Init.bit 15:** Row inversion, possibility to inverse the order of the row outputs (see Table 10 and Fig. 18.12).

**Init.bit 16:** M/LSB, possibility to inverse the order loading for RAM data (see Fig. 4).

**Init.bit 17:** Video bit, possibility to inverse the content of the RAM. All the 0L pass to 1L and all the 1L pass to 0L (see Fig. 18.11).

**Init.bit 18-23:** V<sub>LCD</sub> 64 steps programming bits. See Fig. 8.

Bit 18 (step 1) for MSB and bit 23 (step 6) for LSB.

**Init.bit 24:** Icon bit adds one line more to the selected mux mode ratio for icon segments outputs.

**Init.bit 25:** Sleep 2. Set all outputs at V<sub>SS</sub>.

**Init.bit 26-30:** Must be setted to 0L.

**Init.bit 31:** Fr\_ext give the possibility to supply frame to EM6124 externally. If Fr\_ext=1L then FR is input pin and user must supply signal frame. If Fr\_ext=0L then FR is output pin, the signal frame is internally generated. (**Init.bit 14:** has the priority)

## Reset 1

**Power-up:** Must be followed by a RESET cycle. After the reset 1 pulse the LCD controller driver is set to the following status:

- All outputs at V<sub>SS</sub>
- Blank & Set (cmdbits 0,1) = 0L
- Sleep mode (cmdbit 2) = 0L
- RAM address (cmdbits 3 to 7) = 0L
- Multiplex ratio (init.bits 8, 9) = 0L
- Temperature coefficient (init.bits 10,11) = 0L
- Checker & Inv.Checker (init.bits 12, 13) = 0L
- Col Mode (init.bit 14) = 1L
- Inv. Row (init.bit 15) = 0L
- M/LSB (init.bit 16) = 1L
- Video (init.bit 17) = 1L
- V<sub>LCD</sub> step (init.bits 18 to 23) = 0L
- Icon (init.bit 24) = 0L
- Sleep 2 (init.bit 25) = 1L
- The content of the RAM remains unchanged
- Frame internally generated (init.bit 31) = 0L

An initialization should take place after reset (32 bits sent).

## Pin Assignment

| Name             | Function                            |
|------------------|-------------------------------------|
| S1..S121         | LCD outputs, see Fig.4              |
| FR               | AC I/O signal for LCD driver output |
| DI               | Serial data input                   |
| DO               | Serial data output                  |
| CLK              | Data clock input                    |
| RES1             | General reset                       |
| RES2             | Reset the serial interface counter  |
| V <sub>LCD</sub> | Internal generated voltage output   |
| V <sub>DD1</sub> | Power supply for logic              |
| V <sub>DD2</sub> | Power supply for analogic           |
| V <sub>HV</sub>  | Power supply for high voltage       |
| V <sub>SS</sub>  | Supply GND                          |

Table 9

## Data Transfer Cycle

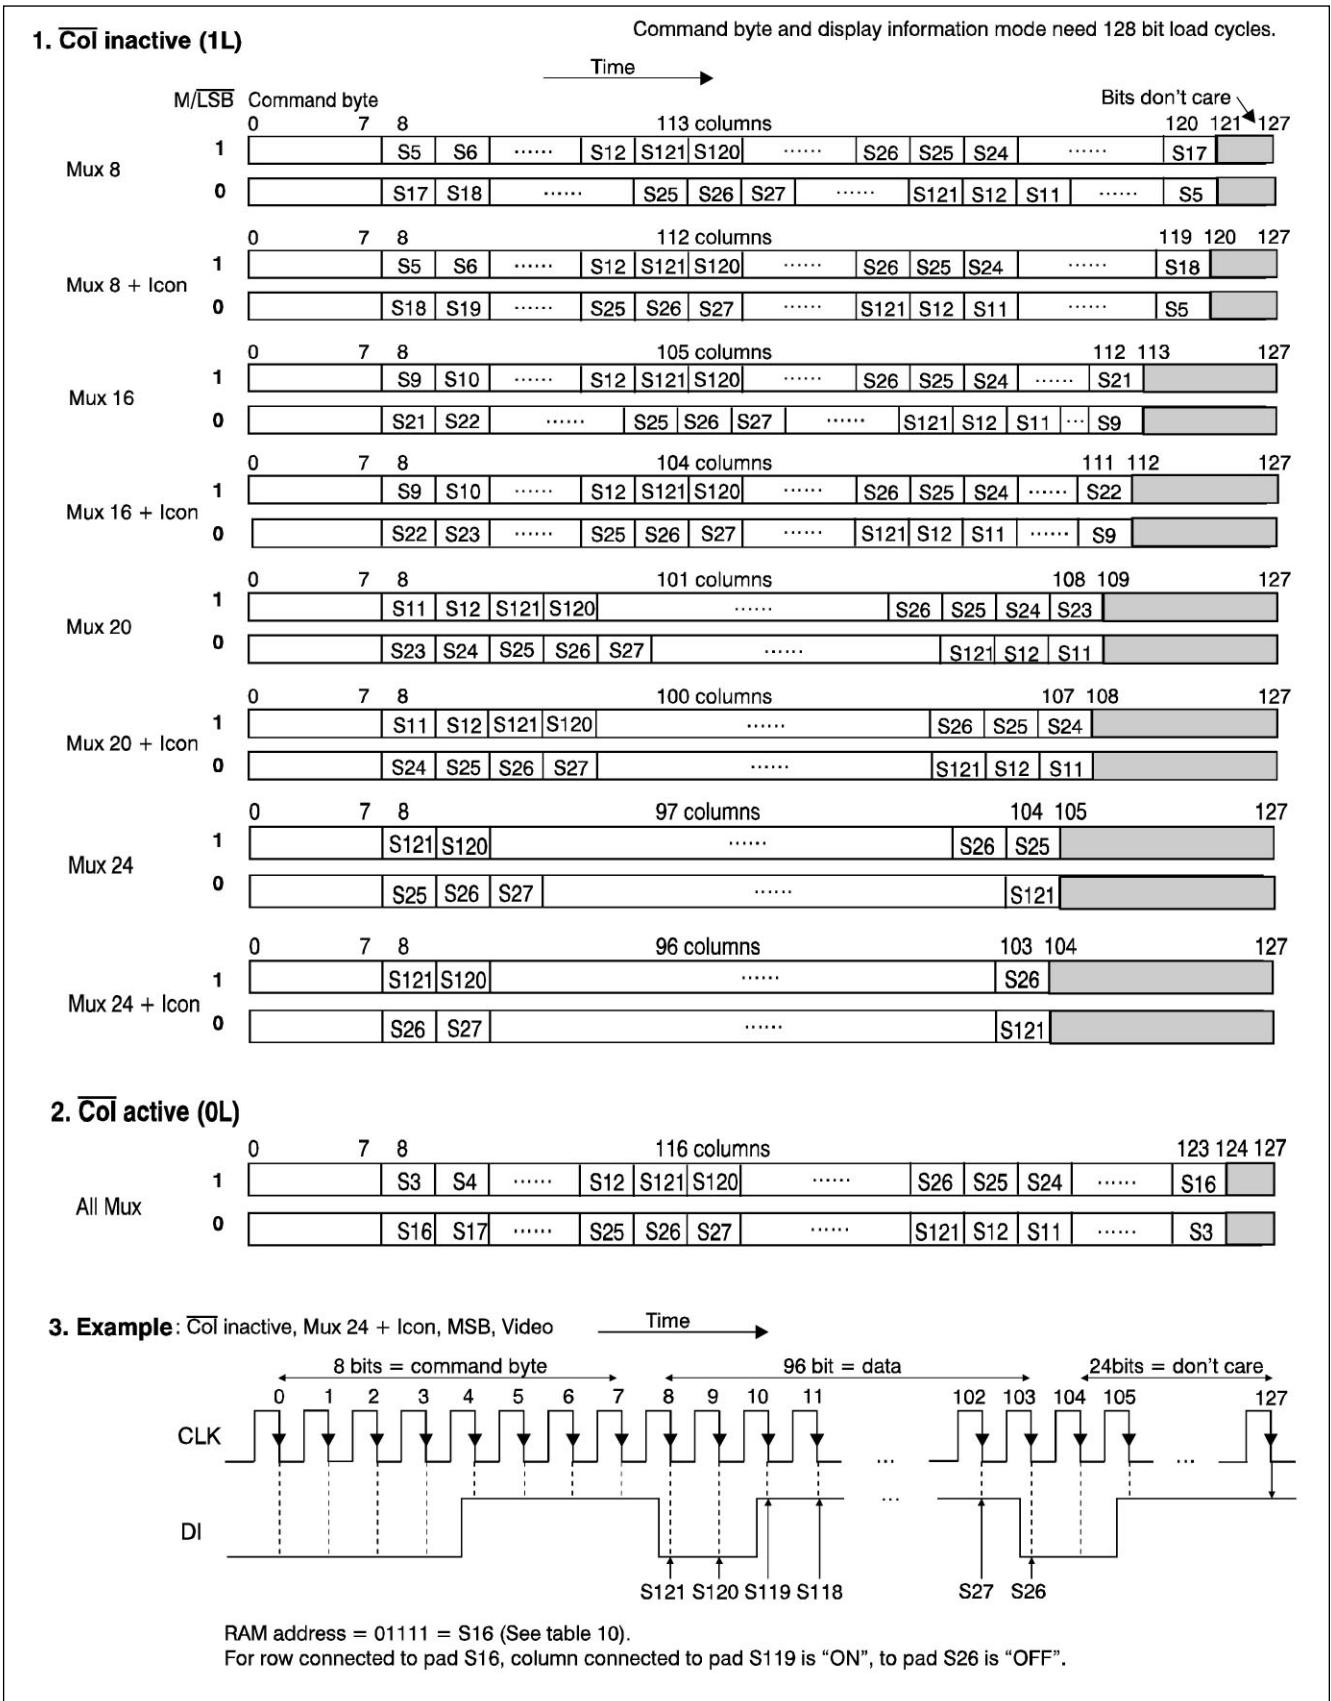


Fig. 4



## Output Row Assignments

| Row | RAM Address |       |       |       |       | Mux Mode |     |              |     |          |     |               |     |          |     |               |     |          |     |               |     |
|-----|-------------|-------|-------|-------|-------|----------|-----|--------------|-----|----------|-----|---------------|-----|----------|-----|---------------|-----|----------|-----|---------------|-----|
|     |             |       |       |       |       | Mu 8     |     | Mux 8 + Icon |     | Mux 16   |     | Mux 16 + Icon |     | Mux 20   |     | Mux 20 + Icon |     | Mux 24   |     | Mux 24 + Icon |     |
|     | Bit 3       | Bit 4 | Bit 5 | Bit 6 | Bit 7 | Inv. Row |     | Inv. Row     |     | Inv. Row |     | Inv. Row      |     | Inv. Row |     | Inv. Row      |     | Inv. Row |     |               |     |
| 1   | 0           | 0     | 0     | 0     | 0     | S1       | S16 | S1           | S17 | S1       | S20 | S1            | S21 | S1       | S22 | S1            | S23 | S1       | S24 | S1            | S25 |
| 2   | 0           | 0     | 0     | 0     | 1     | S2       | S15 | S2           | S16 | S2       | S19 | S2            | S20 | S2       | S21 | S2            | S22 | S2       | S23 | S2            | S24 |
| 3   | 0           | 0     | 0     | 1     | 0     | S3       | S14 | S3           | S15 | S3       | S18 | S3            | S19 | S3       | S20 | S3            | S21 | S3       | S22 | S3            | S23 |
| 4   | 0           | 0     | 0     | 1     | 1     | S4       | S13 | S4           | S14 | S4       | S17 | S4            | S18 | S4       | S19 | S4            | S20 | S4       | S21 | S4            | S22 |
| 5   | 0           | 0     | 1     | 0     | 0     | S13      | S4  | S13          | S13 | S5       | S16 | S5            | S17 | S5       | S18 | S5            | S19 | S5       | S20 | S5            | S21 |
| 6   | 0           | 0     | 1     | 0     | 1     | S14      | S3  | S14          | S4  | S6       | S15 | S6            | S16 | S6       | S17 | S6            | S18 | S6       | S19 | S6            | S20 |
| 7   | 0           | 0     | 1     | 1     | 0     | S15      | S2  | S15          | S3  | S7       | S14 | S7            | S15 | S7       | S16 | S7            | S17 | S7       | S18 | S7            | S19 |
| 8   | 0           | 0     | 1     | 1     | 1     | S16      | S1  | S16          | S2  | S8       | S13 | S8            | S14 | S8       | S15 | S8            | S16 | S8       | S17 | S8            | S18 |
| 9   | 0           | 1     | 0     | 0     | 0     |          |     | S17          | S1  | S13      | S8  | S13           | S13 | S9       | S14 | S9            | S15 | S9       | S16 | S9            | S17 |
| 10  | 0           | 1     | 0     | 0     | 1     |          |     |              |     | S14      | S7  | S14           | S8  | S10      | S13 | S10           | S14 | S10      | S15 | S10           | S16 |
| 11  | 0           | 1     | 0     | 1     | 0     |          |     |              |     | S15      | S6  | S15           | S7  | S13      | S10 | S13           | S13 | S11      | S14 | S11           | S15 |
| 12  | 0           | 1     | 0     | 1     | 1     |          |     |              |     | S16      | S5  | S16           | S6  | S14      | S9  | S14           | S10 | S12      | S13 | S12           | S14 |
| 13  | 0           | 1     | 1     | 0     | 0     |          |     |              |     | S17      | S4  | S17           | S5  | S15      | S8  | S15           | S9  | S13      | S12 | S13           | S13 |
| 14  | 0           | 1     | 1     | 0     | 1     |          |     |              |     | S18      | S3  | S18           | S4  | S16      | S7  | S16           | S8  | S14      | S11 | S14           | S12 |
| 15  | 0           | 1     | 1     | 1     | 0     |          |     |              |     | S19      | S2  | S19           | S3  | S17      | S6  | S17           | S7  | S15      | S10 | S15           | S11 |
| 16  | 0           | 1     | 1     | 1     | 1     |          |     |              |     | S20      | S1  | S20           | S2  | S18      | S5  | S18           | S6  | S16      | S9  | S16           | S10 |
| 17  | 1           | 0     | 0     | 0     | 0     |          |     |              |     |          |     | S21           | S1  | S19      | S4  | S19           | S5  | S17      | S8  | S17           | S9  |
| 18  | 1           | 0     | 0     | 0     | 1     |          |     |              |     |          |     |               |     | S20      | S3  | S20           | S4  | S18      | S7  | S18           | S8  |
| 19  | 1           | 0     | 0     | 1     | 0     |          |     |              |     |          |     |               |     | S21      | S2  | S21           | S3  | S19      | S6  | S19           | S7  |
| 20  | 1           | 0     | 0     | 1     | 1     |          |     |              |     |          |     |               |     | S22      | S1  | S22           | S2  | S20      | S5  | S20           | S6  |
| 21  | 1           | 0     | 1     | 0     | 0     |          |     |              |     |          |     |               |     |          |     | S23           | S1  | S21      | S4  | S21           | S5  |
| 22  | 1           | 0     | 1     | 0     | 1     |          |     |              |     |          |     |               |     |          |     |               |     | S22      | S3  | S22           | S4  |
| 23  | 1           | 0     | 1     | 1     | 0     |          |     |              |     |          |     |               |     |          |     |               |     | S23      | S2  | S23           | S3  |
| 24  | 1           | 0     | 1     | 1     | 1     |          |     |              |     |          |     |               |     |          |     |               |     | S24      | S1  | S24           | S2  |
| 25  | 1           | 1     | 0     | 0     | 0     |          |     |              |     |          |     |               |     |          |     |               |     |          |     | S25           | S1  |

Table 10

### Command Byte Only Mode

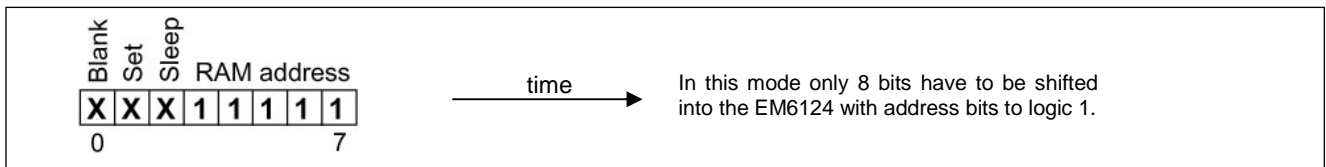


Fig. 5

### Command Byte and Initialization Mode

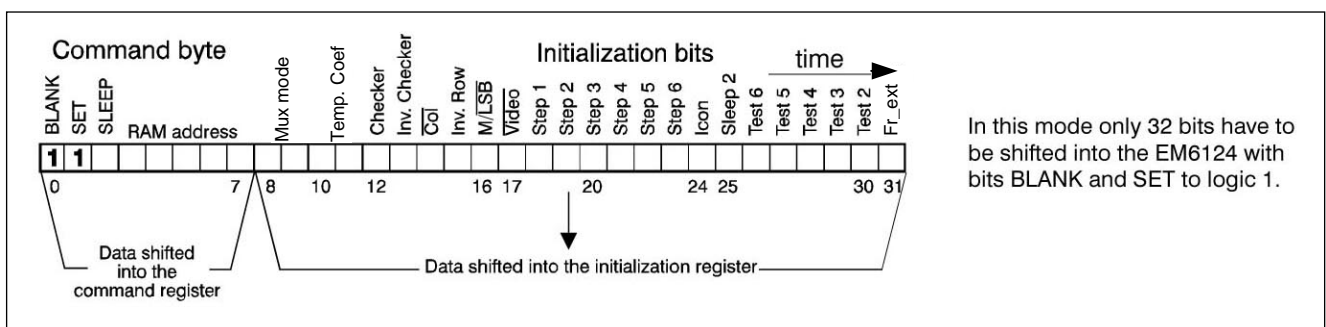


Fig. 6

### Command Byte and Display Information Mode

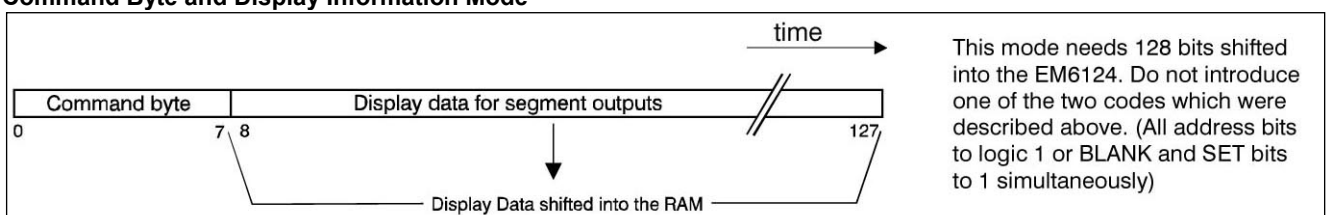


Fig. 7



## Typical $V_{LCD}$ Programming

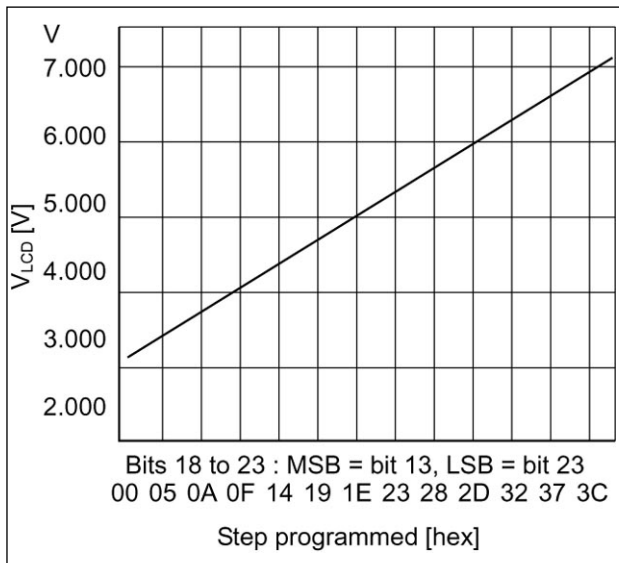


Fig. 8

## Temperature Control

Due to the temperature dependency of liquid crystals viscosity the LCD controlling voltage  $V_{LCD}$  must be increased for lower temperatures to maintain optimal contrast. The EM6124 is available with 4 different temperature coefficients (see Fig. 9). The coefficient is selected by 2 bits in the initialization code TC bits 10 and 11. Table 11 shows the typical values of the different temperature coefficients. They are proportional to the programmed  $V_{LCD}$ .

### Typical Values of the Temperature Coefficients

| Bit 10, Bit 11 | Value                  | Unit  |
|----------------|------------------------|-------|
| 0 0            | $-0.2 \times V_{LCD}$  | mV/°C |
| 0 1            | $-0.52 \times V_{LCD}$ | mV/°C |
| 1 0            | $-1.16 \times V_{LCD}$ | mV/°C |
| 1 1            | $-1.82 \times V_{LCD}$ | mV/°C |

Table 11

## Temperature Coefficients

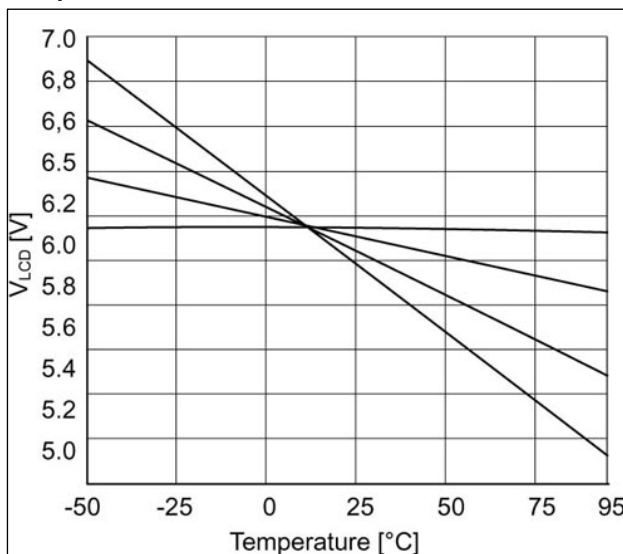


Fig. 9

## Checker and Checker Inverse

A fast check display can be easily created setting initialization bits 12 and 13 (called "Checker" and "Inv. Checker"). The display is completely checked with only 2 initialization sequences, one "Checker" and one "Inv. Checker". For Checker, the pattern fills the display with alternately ON and OFF pixels as shown in Fig. 10. For Inv. Checker, everything is inverted (see Fig.18.14 and 18.15).

### Pattern of Checker Mode

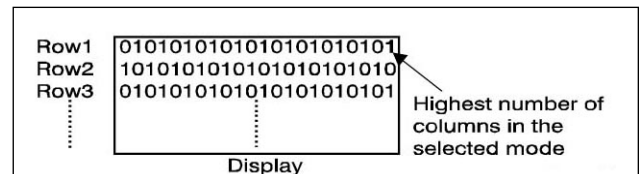


Fig. 10

## Internally Generated $V_{LCD}$ versus Temperature


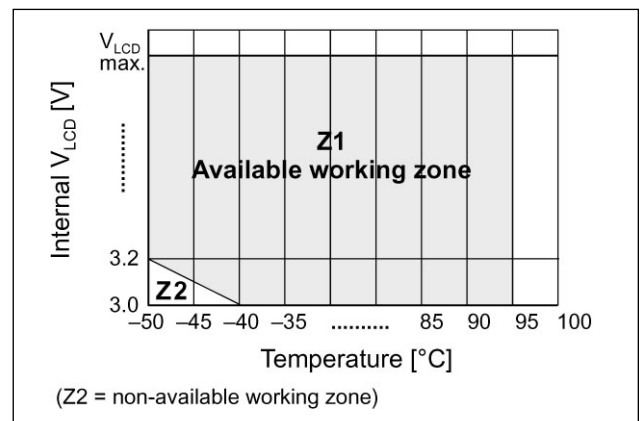


Fig. 11



## Display Functions

| Bit                     | State  |   |
|-------------------------|--|---|
|                         | Logic 0  | Logic 1   |
| 8 - 9: Mux Mode         | See table 8  |   |
| 10 - 11: Temp.Coeff.    | See table 11   |   |
| 12: Checker             | Inactive   | Chess display   |
| 13: Inv. Checker        | Inactive   | Inverse chess display   |
| 14: $\overline{Col}$    | Column driver only   | Row and column driver   |
| 15: Inv. Row            | Increment rows<br>(example for mux 24:<br>row 1, 2, 3, ..., 24, 1, 2, ...) | Decrement rows<br>(example for mux 24:<br>row 24, 23, 22, ..., 2, 1, 24, 23, ...) |
| 16: $M/\overline{LSB}$  | Loading in $\overline{LSB}$ mode   | Loading in MSB mode   |
| 17: $\overline{Video}$  | Inverse content of RAM   | Inactive  |
| 18 - 23: $V_{LCD}$ step | See Fig. 8   |   |
| 24: Icon                | Inactive   | Add one line more to selected mux mode  |
| 25: Sleep               | Inactive   | All outputs at $V_{ss}$   |
| 26 - 30:                | Must be at 0L  |   |
| 31: $Fr_{ext}$          | Frame internally generated   | External frame to be supplied   |

Table 12



## Block Diagram


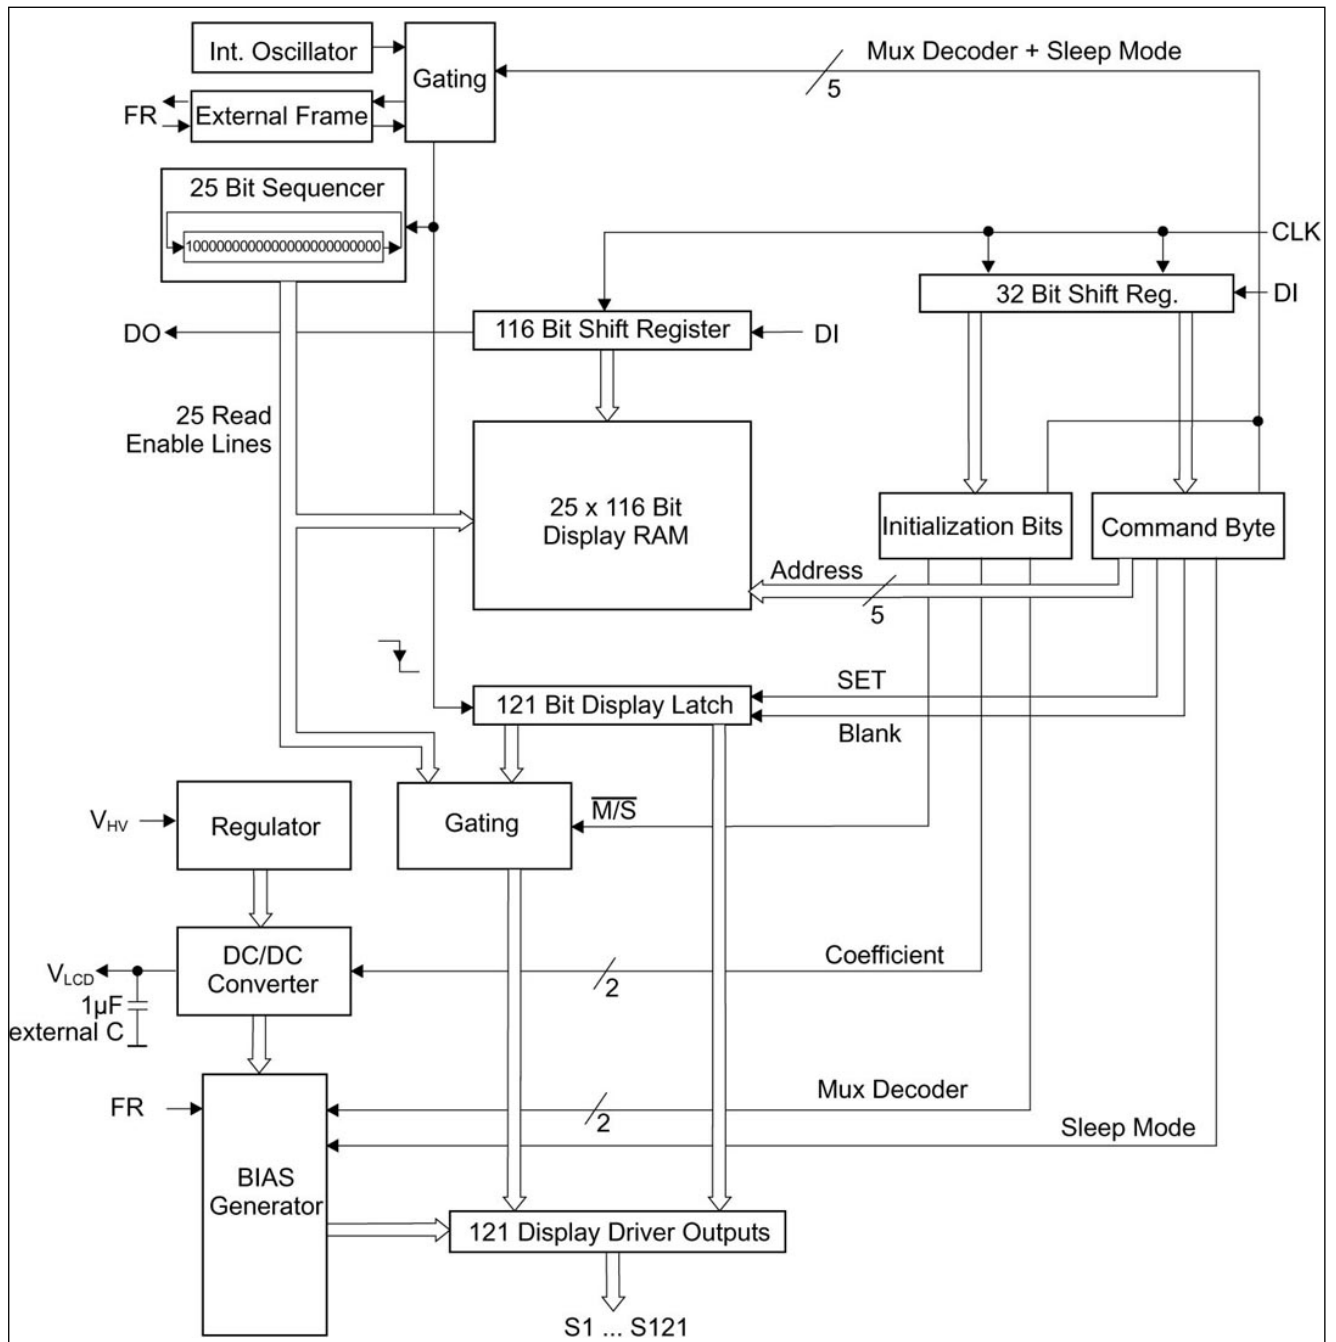


Fig. 12



## LCD Voltage Bias Levels

| LCD Drive Type                  | LCD Bias Configuration | $\frac{V_{OP}}{V_{OFF}(rms)}$                                | $\frac{V_{ON}(rms)}{V_{OFF}(rms)}$             |
|---------------------------------|------------------------|--|--|
| EM6124 (24)<br>n=24<br>1:24 MUX | 6 Levels               | $\sqrt{\frac{\sqrt{n}(\sqrt{n}+1)^2}{2(\sqrt{n}-1)}} = 4.68$ | $\sqrt{\frac{\sqrt{n}+1}{\sqrt{n}-1}} = 1.230$ |
| EM6124 (20)<br>n=20<br>1:20 MUX | 6 Levels               | $\sqrt{\frac{\sqrt{n}(\sqrt{n}+1)^2}{2(\sqrt{n}-1)}} = 4.39$ | $\sqrt{\frac{\sqrt{n}+1}{\sqrt{n}-1}} = 1.255$ |
| EM6124 (16)<br>n=16<br>1:16 MUX | 1/5 Bias<br>6 Levels   | $\sqrt{\frac{\sqrt{n}(\sqrt{n}+1)^2}{2(\sqrt{n}-1)}} = 4.08$ | $\sqrt{\frac{\sqrt{n}+1}{\sqrt{n}-1}} = 1.291$ |
| EM6124 (8)<br>n=8<br>1:8 MUX    | 1/4 Bias<br>6 Levels   | $\frac{4}{\sqrt{1+\frac{3}{n}}} = 3.4$                       | $\sqrt{\frac{n-15}{n+3}} = 1.446$              |

Table 13

## Optimum LCD Bias Voltages

| Multiplex Rate | V <sub>LCD</sub> | V1    | V2    | V3    | V4    | V <sub>SS</sub> |
|----------------|------------------|-------|-------|-------|-------|-----------------|
| 1:24           | 1                | 0.930 | 0.660 | 0.340 | 0.170 | 0               |
| 1:20           | 1                | 0.817 | 0.634 | 0.366 | 0.183 | 0               |
| 1:16           | 1                | 0.800 | 0.600 | 0.400 | 0.200 | 0               |
| 1:8            | 1                | 0.750 | 0.500 | 0.250 | -     | 0'              |

**V<sub>LCD</sub> > V1 > V2 > V3 > V4 > V<sub>SS</sub>**

The values in the above table are given in reference to V<sub>LCD</sub> eg. 0.5 means 0.5 x V<sub>LCD</sub>

Table 14

## Row and Column Multiplexing Waveform EM6124 (8)

$$V_{CP} = V_{LCD} - V_{SS}, \quad V_{STATE} = V_{COL} - V_{ROW}$$

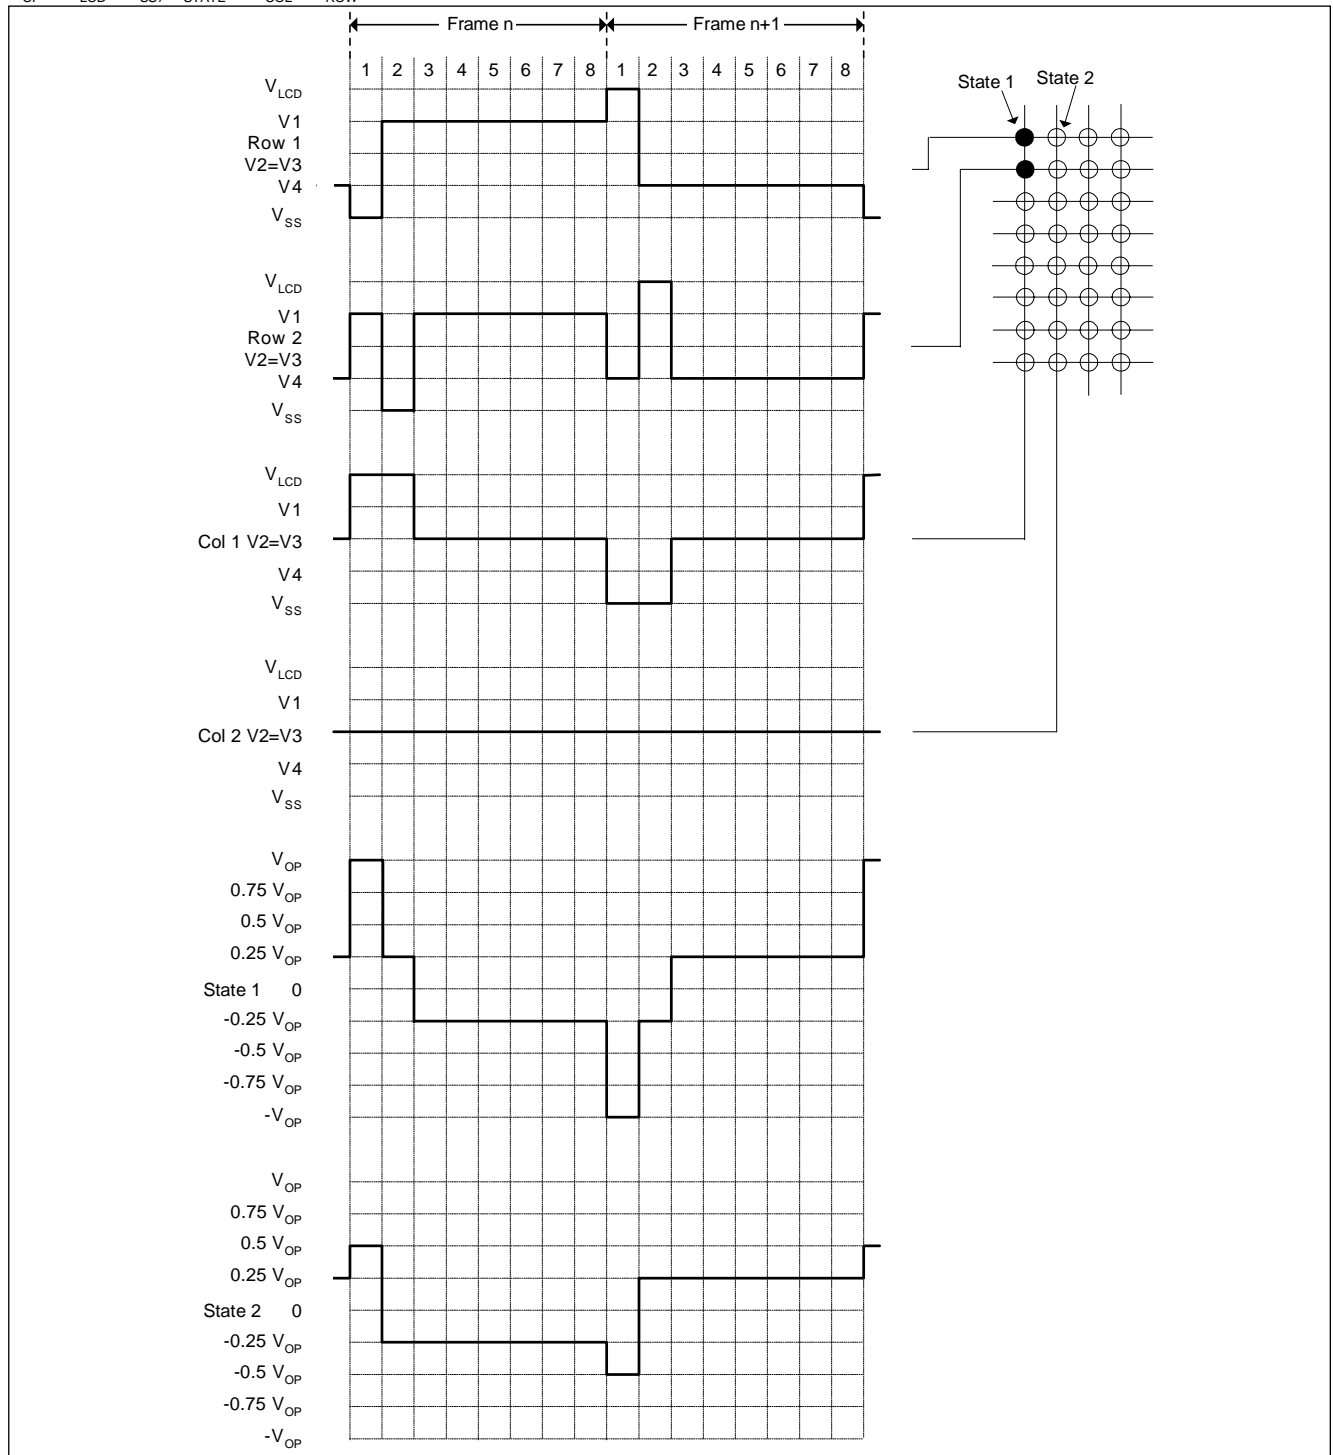


Fig. 13

## Row and Column Multiplexing Waveform EM6124 (16)

$$V_{CP} = V_{LCD} - V_{SS}, V_{STATE} = V_{COL} - V_{ROW}$$

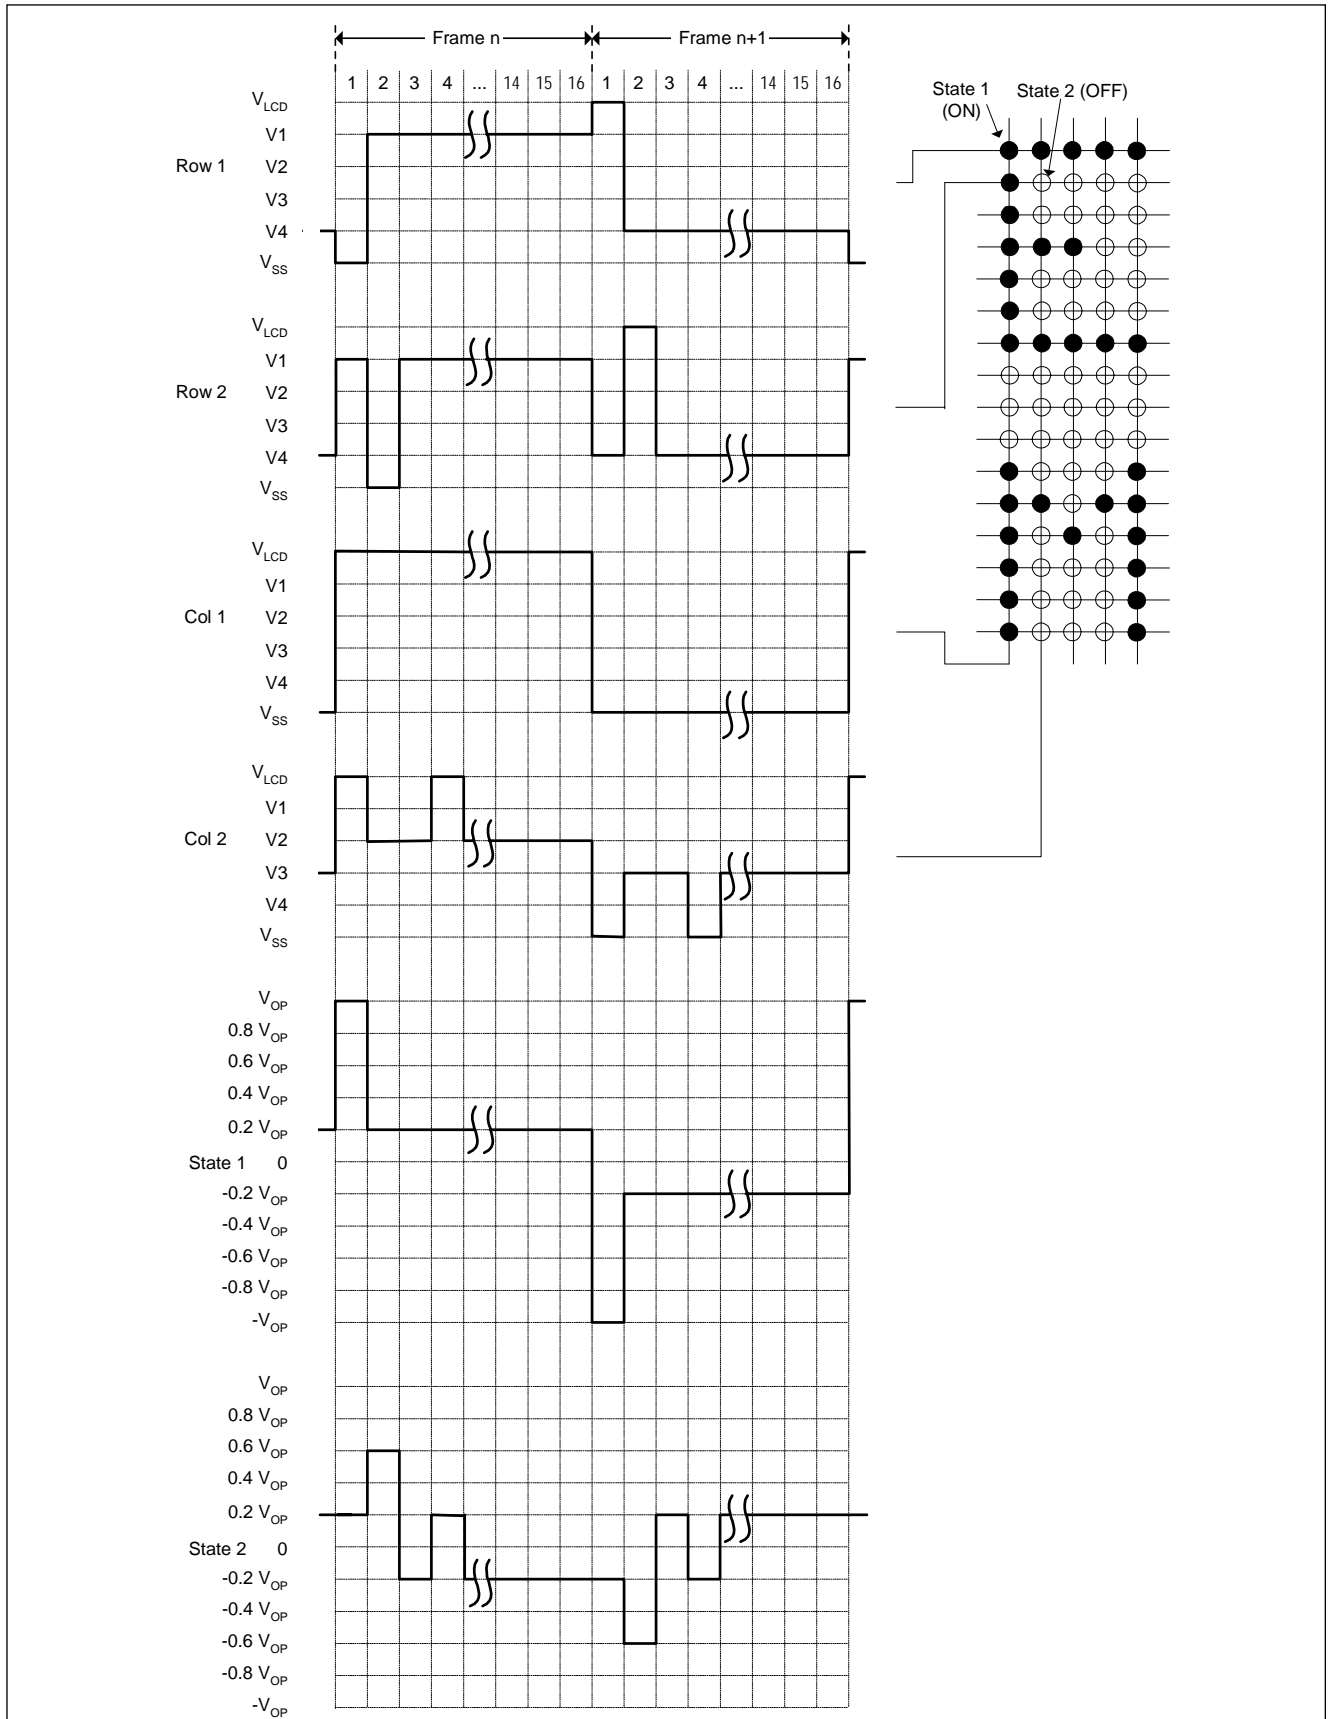


Fig. 14

## Row and Column Multiplexing Waveform EM6124 (20)

$$V_{CP} = V_{LCD} - V_{SS}, V_{STATE} = V_{COL} - V_{ROW}$$

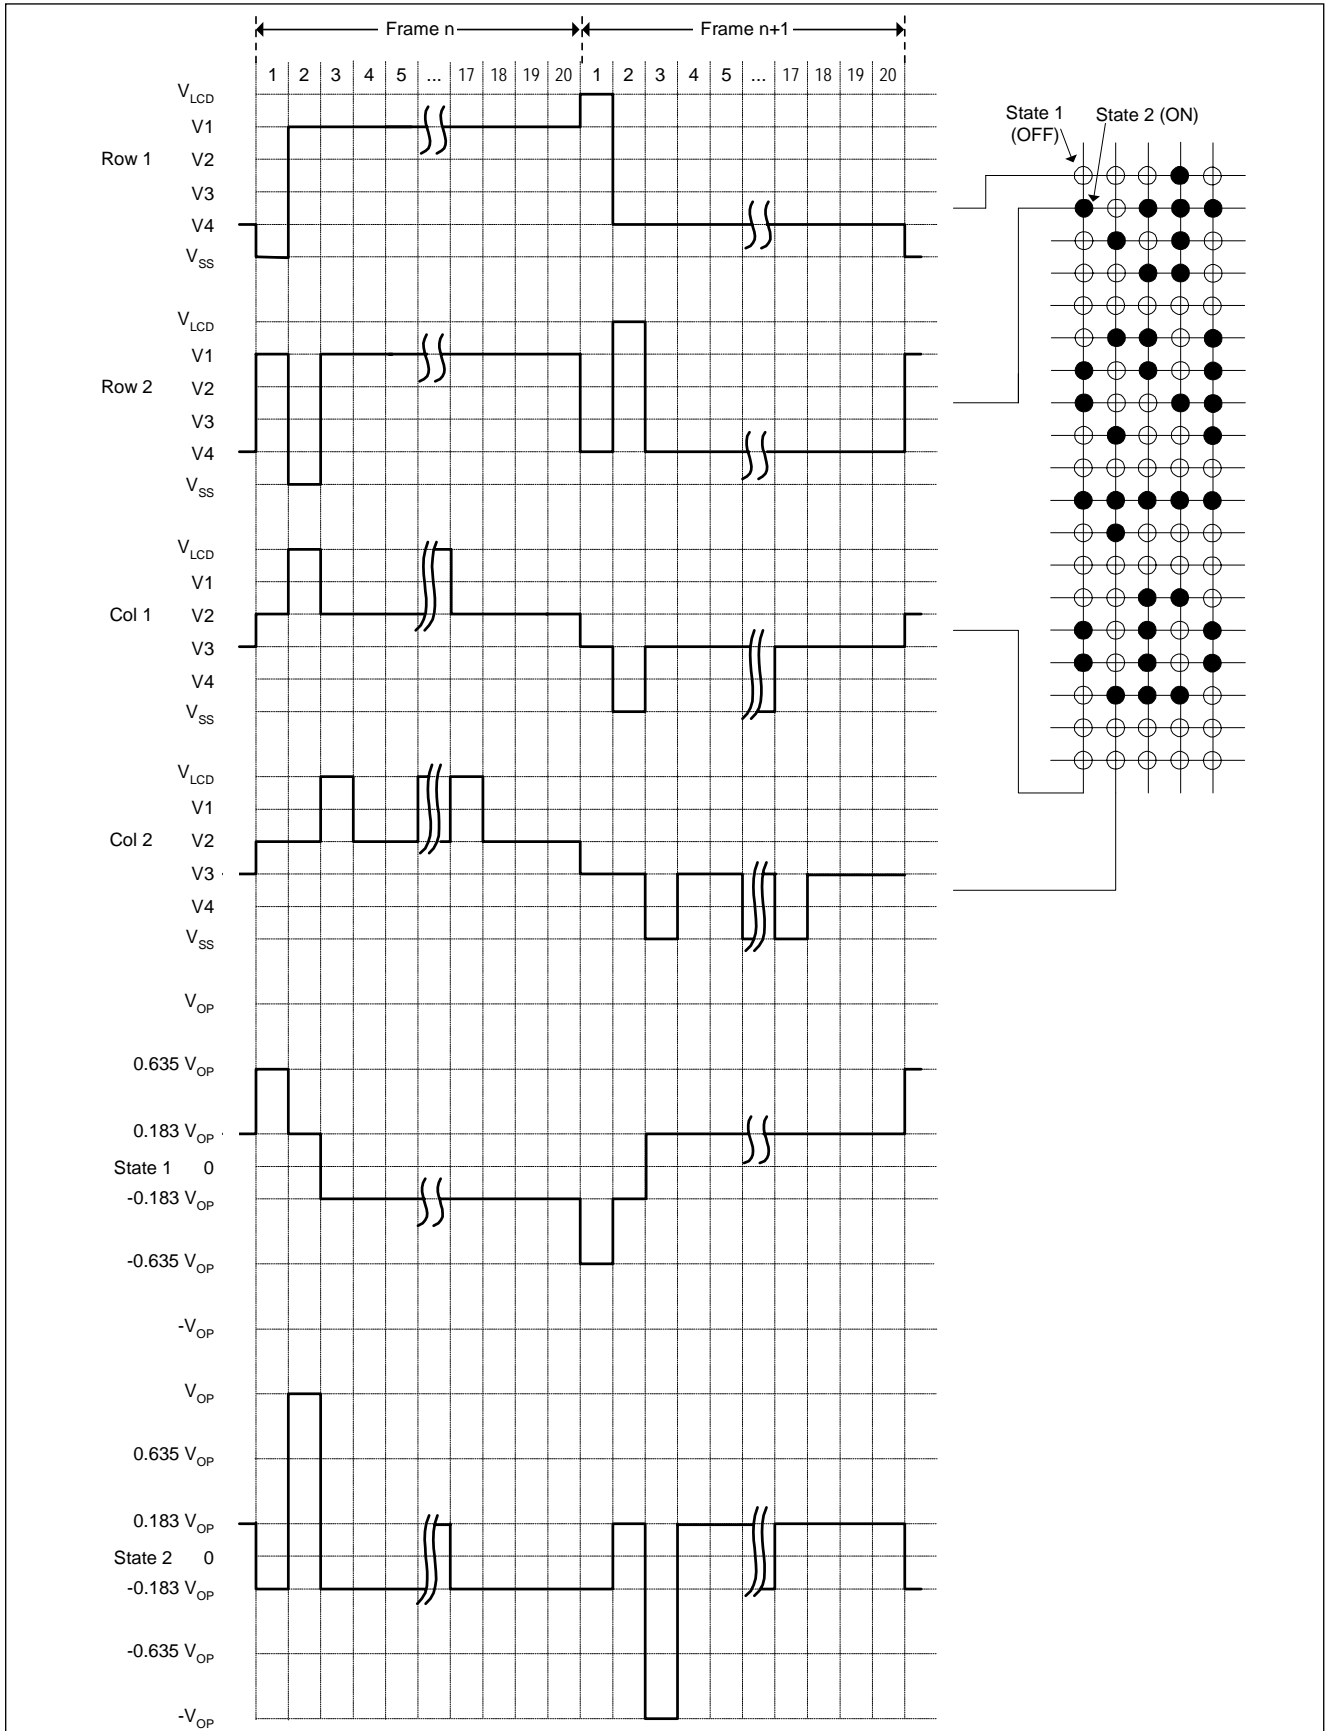


Fig. 15

## Row and Column Multiplexing Waveform EM6124 (24)

$$V_{CP} = V_{LCD} - V_{SS}, V_{STATE} = V_{COL} - V_{ROW}$$


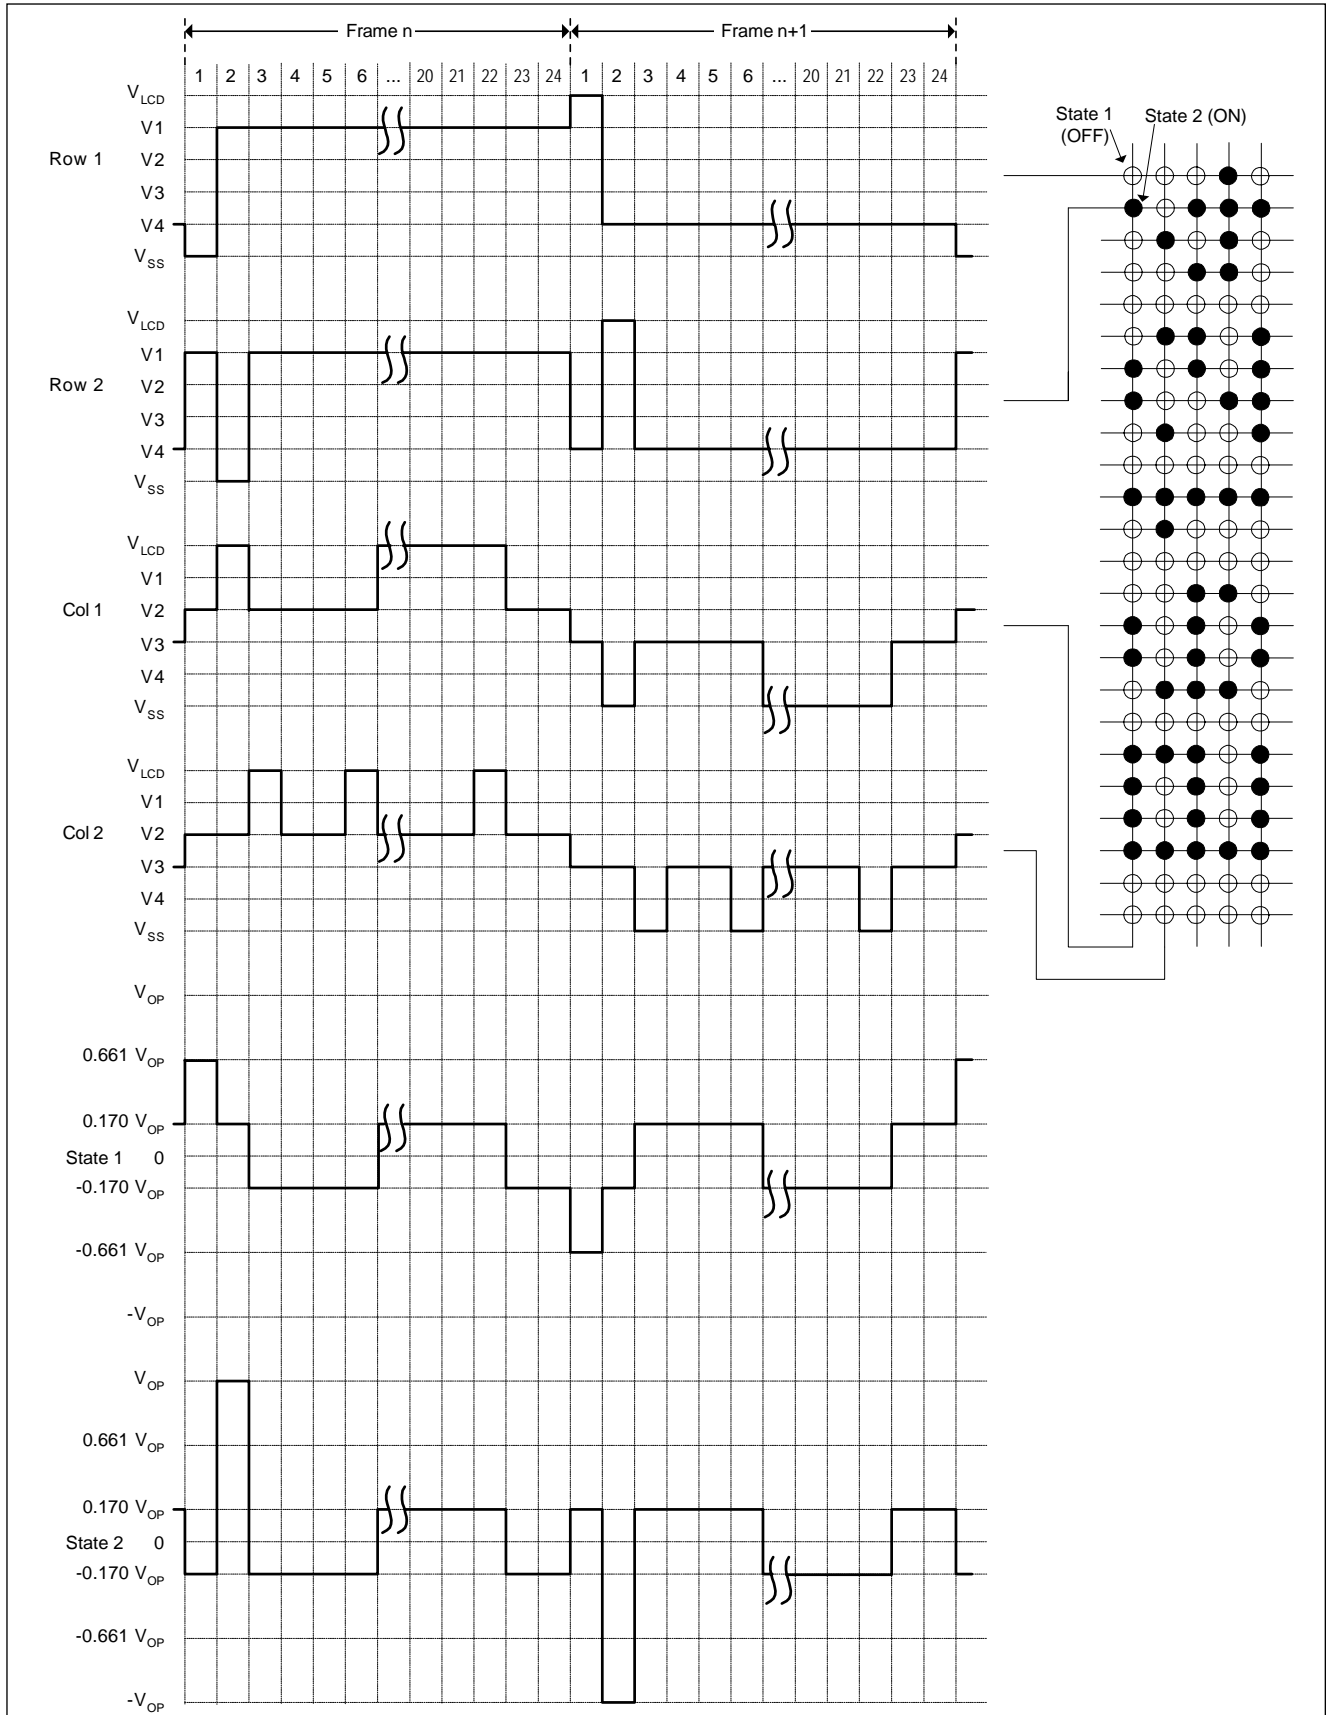


Fig. 16





## Functional Description

### Supply Voltage $V_{DD1}$ , $V_{DD2}$ , $V_{HV}$ , $V_{LCD}$ , $V_{SS}$

The voltage between  $V_{DD1}$  and  $V_{SS}$  is the supply voltage for the logic and the interface. The voltage between  $V_{DD2}$  and  $V_{SS}$  is the supply voltage for the analogic.  $V_{DD1}$  and  $V_{DD2}$  must be the same voltage and, in order to guarantee the best functioning,  $V_{DD1}$  and  $V_{DD2}$  have to be separately connected to the PCB (see Fig. 19). The voltage  $V_{LCD}$  is internally generated for the supply voltage of the LCD and is used for the generation of the internal LCD bias level. An external capacitor of 1  $\mu$ F must be connected between  $V_{LCD}$  and  $V_{SS}$ . Table 15 shows the relationship between  $V1$ ,  $V2$ ,  $V3$ ,  $V4$  for a programmed multiplex rate. Note that  $V_{LCD} > V1 > V2 > V3 > V_{SS}$  for the EM6124 8 mux programmed, and for the EM6124 16, 20, 24 mux programmed  $V_{LCD} > V1 > V2 > V3 > V4 > V_{SS}$ . The voltage between  $V_{HV}$  and  $V_{SS}$  is the supply voltage for high voltage part of the EM6124. An external  $V_{LCD}$  may also be used by connecting a power supply and programming a lower  $V_{LCD}$  voltage during initialization.

### Data Input

The data input pin, DI, is used to load serial data into the EM6124. The normal serial data word length is 128 bits. 32 and 8 bits are also available in a special mode (see 1 Bit Interface Description). The command byte is loaded first and then the segment data bits (see Fig. 4).

### $\overline{RES1}$ Input

Reset is accomplished by applying an external  $\overline{RES1}$  pulse (active low). When reset occurs within the specified time, all internal register are reset however the content of the RAM is still unchanged. The state after reset is described on page 4.

### $\overline{RES2}$ Input

Reset is accomplished by applying an external  $\overline{RES2}$  pulse (active low). When reset occurs within the specified time, the internal counter for serial interface is reset. The counter of the serial interface for data inputs is ready for a new loading of data. This reset 2 does not change the content of the RAM neither the content of the command and the initialization bits. To avoid trouble in case of software interrupt of the MPU during data loading, this function can be used.

### Typical Frame Frequency at $V_{DD} = 3V$

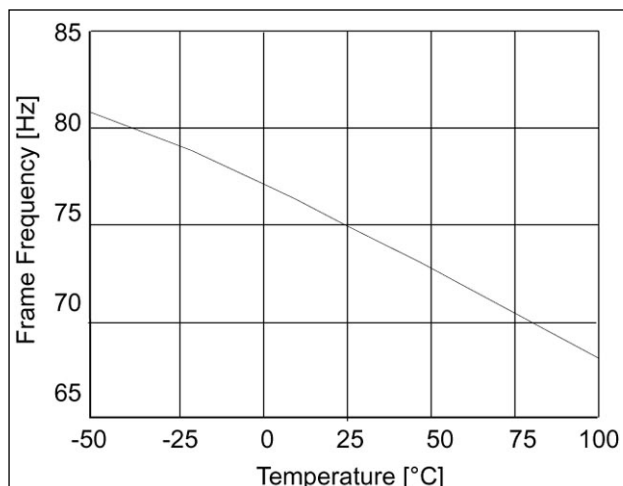


Fig. 17.01

### Power-Up

On power up the data in the shift registers, the display RAM, the sequencer driving the 8/16/20/24 rows and the 121 bit display latches are undefined.

### CLK Input

The clock input is used to clock the DI serial data into the EM6124.

### FR Input / Output

The frame frequency is realized by an internal oscillator with a typical value of 75 Hz. The internal row frequency changes with the number of rows ( $F_{row} = 75 \times n$ , where  $n = 8, 16, 20, 24$ ). When bit 14 ( $\overline{Col}$ ) is inactive (active low), the frame frequency is given by the internal oscillator. This frequency can be measured on the I/O FR. When bit 14 ( $\overline{Col}$ ) is active (active low) or bit 31 ( $Fr_{ext}$ ) is active (active high), the frame frequency is external then the frequency is given directly by the FR input to the row and column driver (see Fig. 16 and 17 for more details concerning the frame frequency).

| $\overline{Col}$ | $Fr_{ext}$ | Pad Frame          |
|------------------|------------|--------------------|
| 0                | 0          | input - ext frame  |
| 0                | 1          | input - ext frame  |
| 1                | 0          | output - int frame |
| 1                | 1          | input - ext frame  |

### Driver Outputs S1 to S116

There are 121 LCD driver outputs on the EM6124. The output assignments depend on the chosen mux mode ratio (init. bits 8, 9) and the Col function (init. bit 14).

When init. bit 14 ( $\overline{Col}$ ) is active, all 116 outputs function as column drivers. Table "Output Row Assignments" and Fig. 4 describe exactly the correspondent data to the output of the chip. There is one to one relationship between the display RAM and the LCD driver outputs. Each pixel (segment) driven by the EM6124 on the LCD has a display RAM bit which corresponds to it. Setting the bit turns the pixel "on" and Clearing it turns "off".

For chip-on-glass better performances can be obtained by covering the backside of the chip.

### Typical Frame Frequency at $T_A = 25^\circ C$

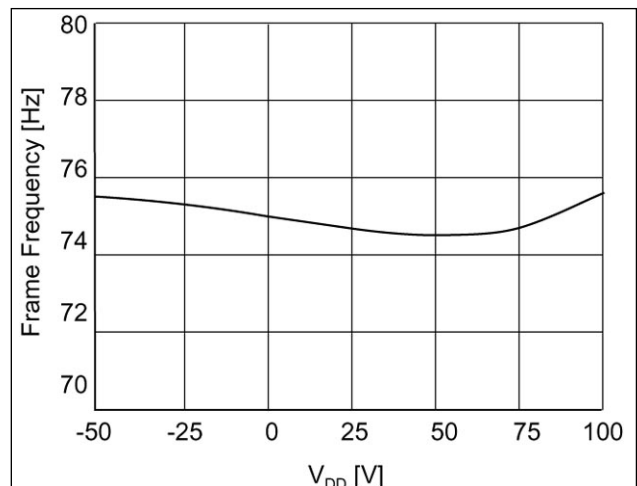


Fig. 17.02

## Functional Description for Versions

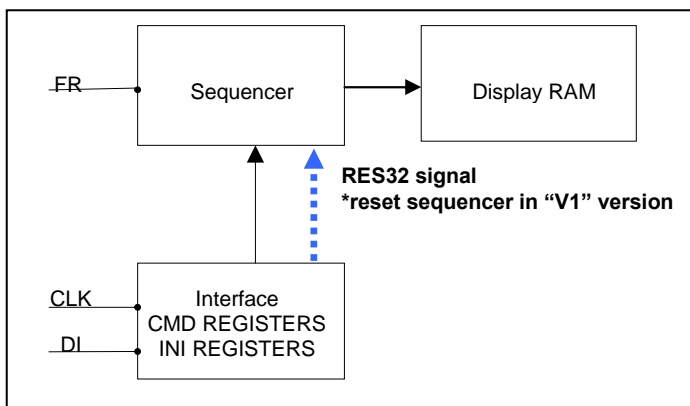
EM6124 is available in two different versions "V1" and "V2":

- EM6124V1
- EM6124V2

The difference is the effect of 32 bits initialization procedure. Basically the sequencer block (see block diagram page 9) is used for refresh the rows of the display RAM block, depending of the version ("V1" or "V2") the sequencer block could be reset or not by the 32 bits initialization procedure.

### Functional description EM6124V1


The block sequencer is reset when 32 bits initialization is sent to EM6124V1. Internal signal named "RES32" reset the sequencer, the row1 will be selected during next frame period.



Internal "RES32" signal is used to synchronise the sequencer in cascaded applications.

### Functional description EM6124V2

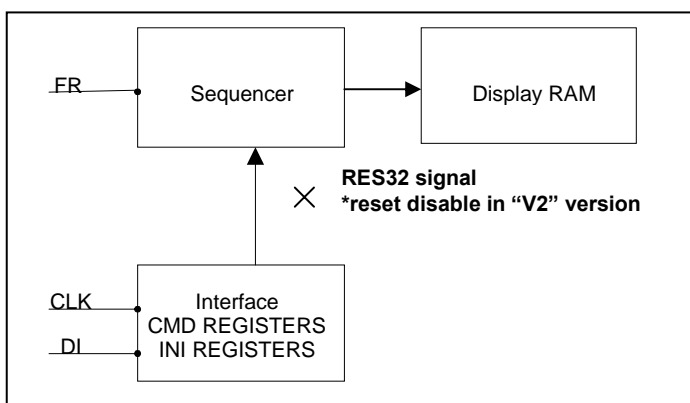Disable "RES32" in the sequencer block



Internal "RES32" signal is disabled, this version is not recommended for cascaded applications.

## Application Example

These tables/figures show how to use the EM6124 with a given initialization. Rows "Data" show the logical value to affect pad DI for each falling edge of pad CLK. A reset cycle pad RES1 at OL is required before sending data.

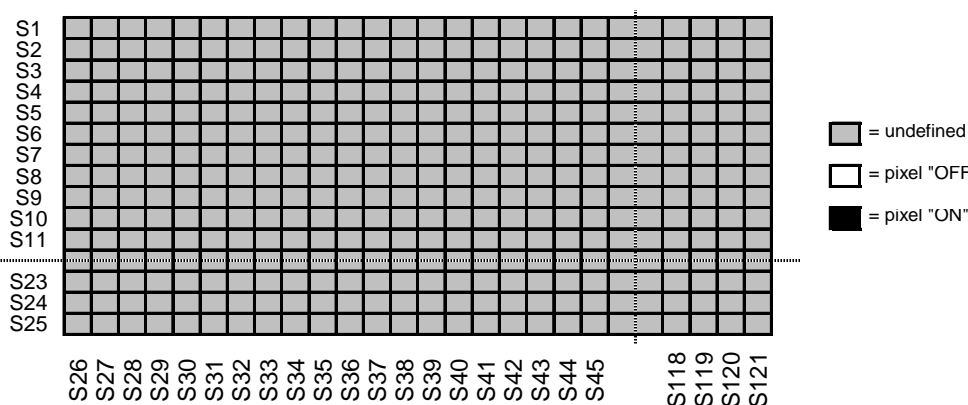
| Command byte |   |   |   |   |   |   |   | Initialization bits or display data |  |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                      |
|--------------|---|---|---|---|---|---|---|-------------------------------------|--|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------------------|
| Bit No       | 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7                                   | 8  | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |                      |
| Data         | 1   | 1 | 0 | 0 | 0 | 0 | 0 | 0                                   | 1  | 1 | 0  | 1  | 0  | 0  | 1  | 0  | 0  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |                      |
| Description  | <b>Bits 0,1 = 1,1:</b> initialization is programmed<br><b>Bit 2 = 0:</b> no sleep mode<br><b>Bits 3 to 7:</b> don't care in this case (not 11111) |   |   |   |   |   |   |                                     | <b>Bits 8,9,24 = 1,1,1:</b> mux mode 24 + icon; 25 rows driven<br><b>Bits 10,11 = 0,1:</b> temperature coefficient = $-(0.52 \cdot V_{LCD})$ mV/°C<br><b>Bits 12,13 = 0,0:</b> no checker or inv. checker functions<br><b>Bit 14 = 1:</b> row and column driver configuration<br><b>Bit 15 = 0:</b> row 1 of the RAM displayed on S1, row 2 on S2, ... and row 25 on S25<br><b>Bit 16 = 0:</b> first data sent displayed on S26, last one on S121<br><b>Bit 17 = 1:</b> 1L in the RAM corresponds to a pixel "ON"<br><b>Bit 18 to 23 = 1,1,0,0,0,0:</b> programmed $V_{LCD} = 3.15 + (1 \cdot 32 + 1 \cdot 16 + 0 \cdot 8 + 0 \cdot 4 + 0 \cdot 2 + 0 \cdot 1) \cdot 0.0625 = 6.150V$<br><b>Bit 25 = 0:</b> no sleep<br><b>Bit 26 to 31 = 0,0,0,0,0,0:</b> every test bit must be set to 0 |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                      |
| Result       |    |   |   |   |   |   |   |                                     |  |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | First Initialization |

Fig. 18.01

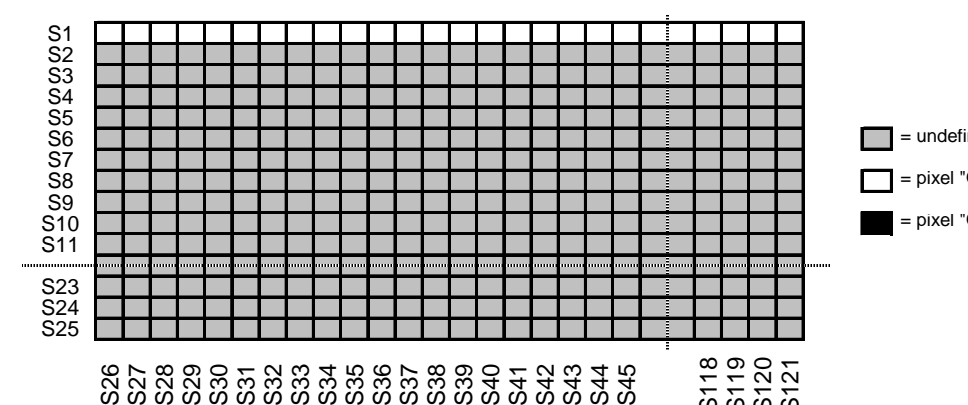
| Bit No      | 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8  | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | -- | 125 | 126 | 127 |  |  |             |
|-------------|--|---|---|---|---|---|---|---|--|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|--|--|-------------|
| Data        | 0  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0 | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | -- | 0   | 0   | 0   |  |  |             |
| Description | <b>Bits 0,1,2 = 0,0,0:</b> no set, no blank, no sleep<br><b>Bits 3 to 7 = 0,0,0,0,0:</b> data sent to row 1 of the RAM |   |   |   |   |   |   |   | <b>Bits 8 to 103 = 0,0,...,0:</b> first row of the RAM is loaded with 0,0,...,0<br><b>Bits 104 to 127 = don't care</b> |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |     |     |  |  |             |
| Result      |                                    |   |   |   |   |   |   |   |  |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |     |     |  |  | Write Row 1 |

Fig. 18.02

Table 15  
(continued on next pages)

## Application Example continued

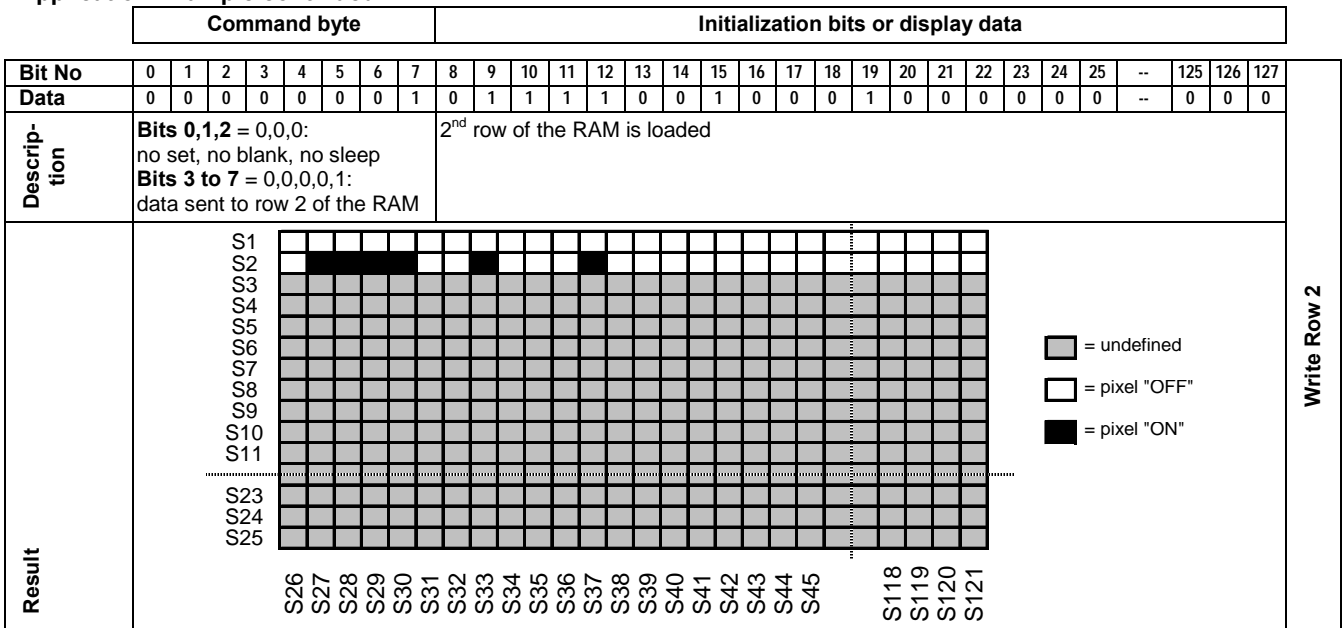


Fig. 18.03

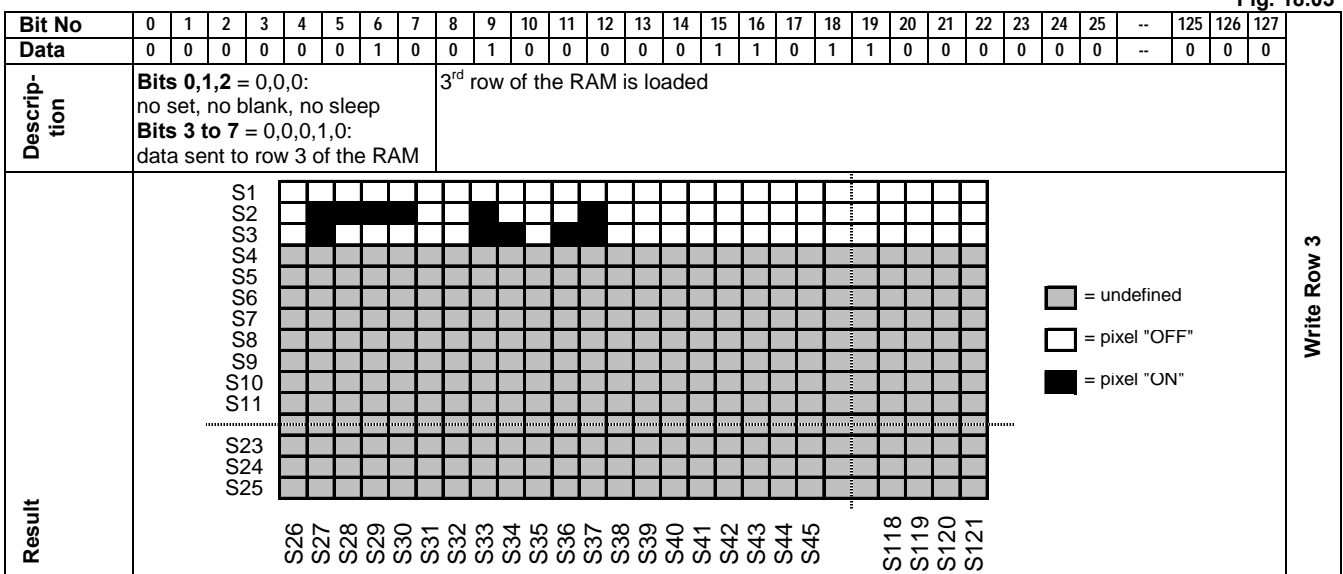


Fig. 18.04

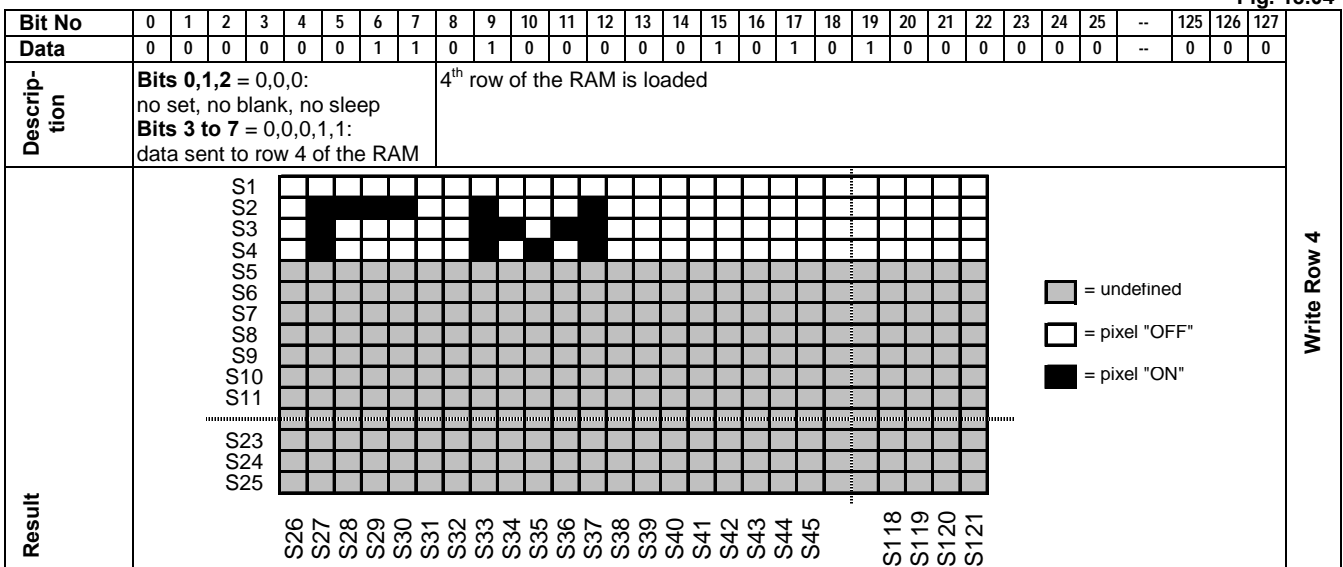


Fig. 18.05

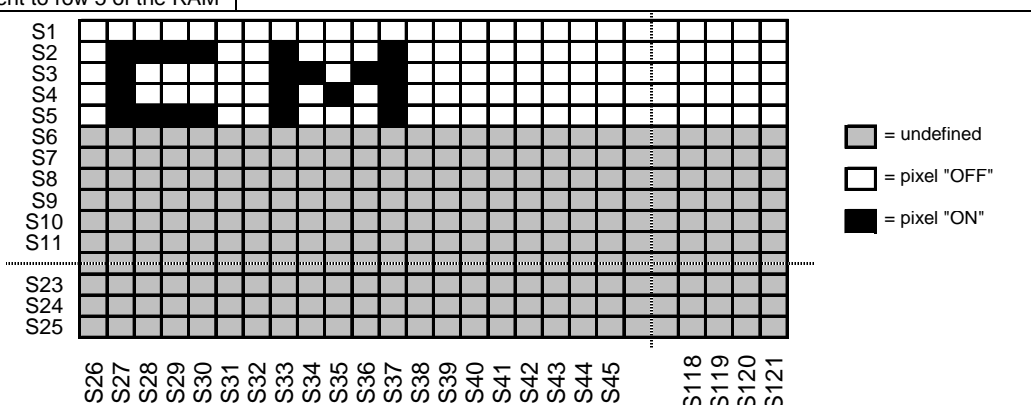
| Command byte             |  |   |   |   |   |   |   | Initialization bits or display data      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |             |     |
|--------------------------|--|---|---|---|---|---|---|--|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-------------|-----|
| <b>Bit No</b>            | 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7  | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | -- | 125 | 126         | 127 |
| <b>Data</b>              | 0  | 0 | 0 | 0 | 0 | 1 | 0 | 0  | 0 | 1 | 1  | 1  | 1  | 0  | 0  | 1  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | -- | 0   | 0           | 0   |
| <b>Descrip-<br/>tion</b> | <b>Bits 0,1,2</b> = 0,0,0:<br>no set, no blank, no sleep<br><b>Bits 3 to 7</b> = 0,0,1,0,0:<br>data sent to row 5 of the RAM |   |   |   |   |   |   | 5 <sup>th</sup> row of the RAM is loaded |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |             |     |
| <b>Result</b>            |    |   |   |   |   |   |   |  |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     | Write Row 5 |     |

Fig. 18.06

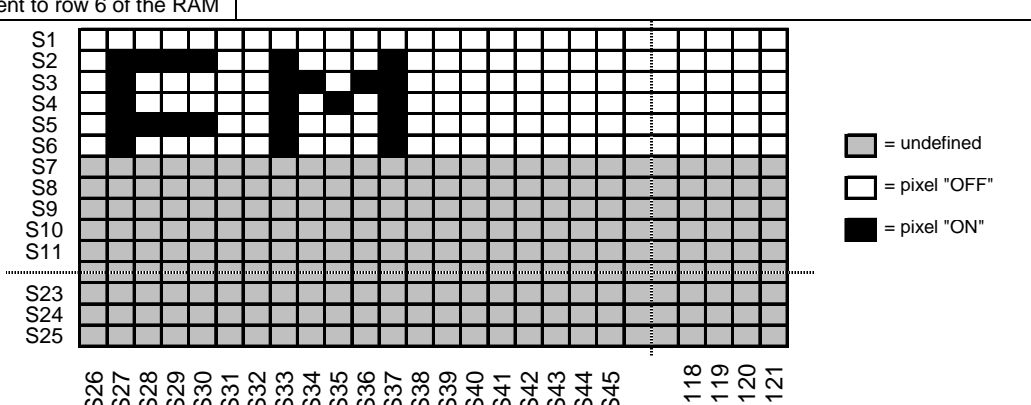
|                          |  |   |   |   |   |   |   |  |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |             |     |
|--------------------------|--|---|---|---|---|---|---|--|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-------------|-----|
| <b>Bit No</b>            | 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7  | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | -- | 125 | 126         | 127 |
| <b>Data</b>              | 0  | 0 | 0 | 0 | 0 | 1 | 0 | 1  | 0 | 1 | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | -- | 0   | 0           | 0   |
| <b>Descrip-<br/>tion</b> | <b>Bits 0,1,2</b> = 0,0,0:<br>no set, no blank, no sleep<br><b>Bits 3 to 7</b> = 0,0,1,0,1:<br>data sent to row 6 of the RAM |   |   |   |   |   |   | 6 <sup>th</sup> row of the RAM is loaded |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |             |     |
| <b>Result</b>            |    |   |   |   |   |   |   |  |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     | Write Row 6 |     |

Fig. 18.07

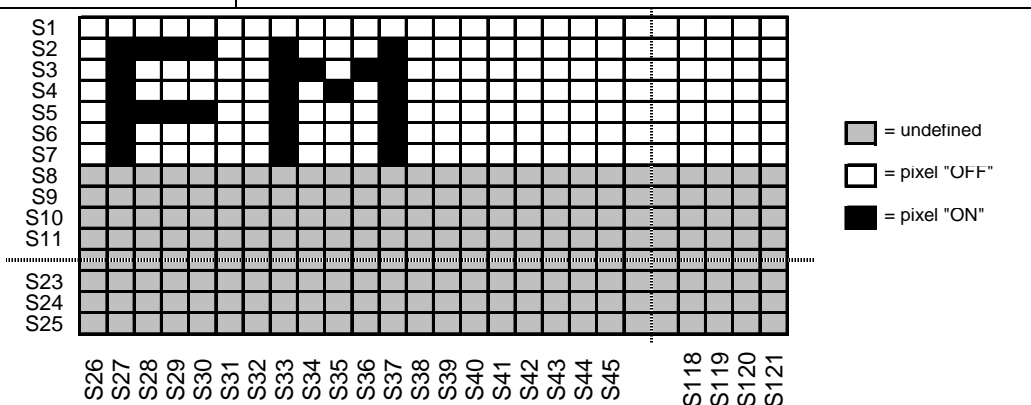
|                          |  |   |   |   |   |   |   |  |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |             |     |
|--------------------------|--|---|---|---|---|---|---|--|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-------------|-----|
| <b>Bit No</b>            | 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7  | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | -- | 125 | 126         | 127 |
| <b>Data</b>              | 0  | 0 | 0 | 0 | 0 | 1 | 1 | 0  | 0 | 1 | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | -- | 0   | 0           | 0   |
| <b>Descrip-<br/>tion</b> | <b>Bits 0,1,2</b> = 0,0,0:<br>no set, no blank, no sleep<br><b>Bits 3 to 7</b> = 0,0,1,1,0:<br>data sent to row 7 of the RAM |   |   |   |   |   |   | 7 <sup>th</sup> row of the RAM is loaded |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |             |     |
| <b>Result</b>            |    |   |   |   |   |   |   |  |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     | Write Row 7 |     |

Fig. 18.08

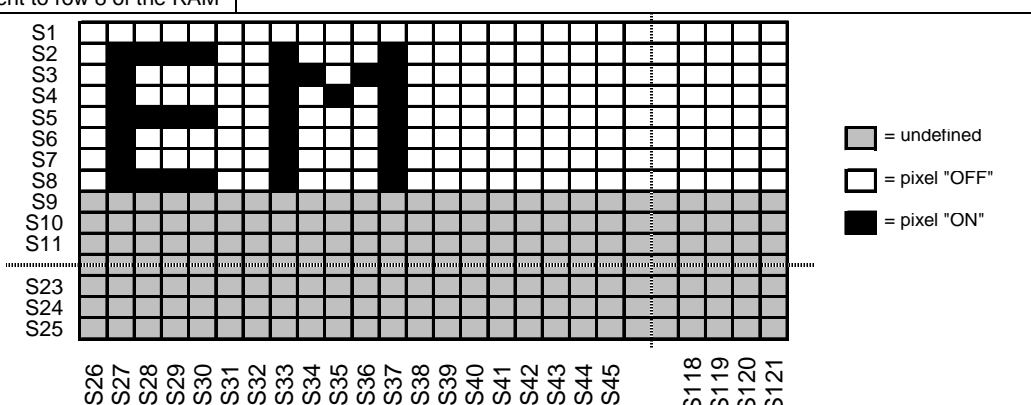
| Command byte     |  |   |   |   |   |   |   | Initialization bits or display data |  |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |             |     |
|------------------|--|---|---|---|---|---|---|-------------------------------------|--|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-------------|-----|
| Bit No           | 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7                                   | 8  | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | -- | 125 | 126         | 127 |
| Data             | 0  | 0 | 0 | 0 | 0 | 1 | 1 | 1                                   | 0  | 1 | 1  | 1  | 1  | 0  | 0  | 1  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | -- | 0   | 0           | 0   |
| Descrip-<br>tion | <b>Bits 0,1,2</b> = 0,0,0:<br>no set, no blank, no sleep<br><b>Bits 3 to 7</b> = 0,0,1,1,1:<br>data sent to row 8 of the RAM |   |   |   |   |   |   |                                     | 8 <sup>th</sup> row of the RAM is loaded |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |             |     |
| Result           |    |   |   |   |   |   |   |                                     |  |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     | Write Row 8 |     |

Fig. 18.09


|                  |  |   |   |   |   |   |   |   |  |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |             |     |
|------------------|--|---|---|---|---|---|---|---|--|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|-------------|-----|
| Bit No           | 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8  | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | -- | 125 | 126         | 127 |
| Data             | 0  | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0  | 0 | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | -- | 0   | 0           | 0   |
| Descrip-<br>tion | <b>Bits 0,1,2</b> = 0,0,0:<br>no set, no blank, no sleep<br><b>Bits 3 to 7</b> = 0,1,0,0,0:<br>data sent to row 9 of the RAM |   |   |   |   |   |   |   | 9 <sup>th</sup> row of the RAM is loaded |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |             |     |
| Result           |    |   |   |   |   |   |   |   |  |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     | Write Row 9 |     |

Fig. 18.10


|                  |  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                                      |    |    |    |
|------------------|--|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------------------------------------|----|----|----|
| Bit No           | 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8   | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28                                   | 29 | 30 | 31 |
| Data             | 1  | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1   | 1 | 0  | 1  | 0  | 0  | 1  | 0  | 0  | 0  | 1  | 1  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0                                    | 0  | 0  | 0  |
| Descrip-<br>tion | <b>Bits 0,1</b> = 1,1:<br>no set, no blank, no sleep<br><b>Bit 2</b> = 0<br><b>Bits 3 to 7</b> = don't care in this case (not 1,1,1,1,1) |   |   |   |   |   |   |   | <b>Bit 17</b> = 0: 1L in the RAM corresponds to a pixel "OFF" |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                                      |    |    |    |
| Result           |    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | Initialization in Video Inverse Mode |    |    |    |

Fig. 18.11

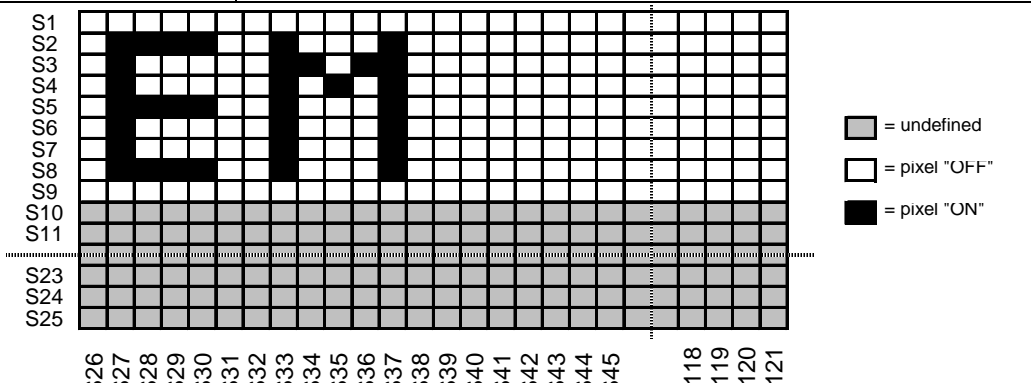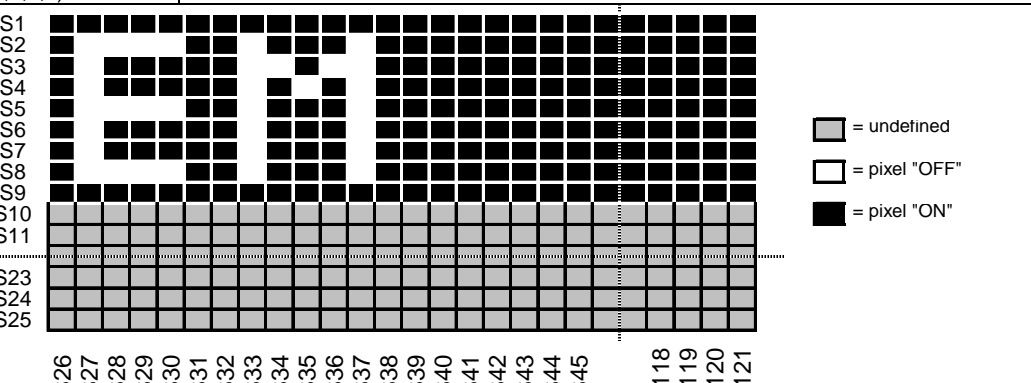

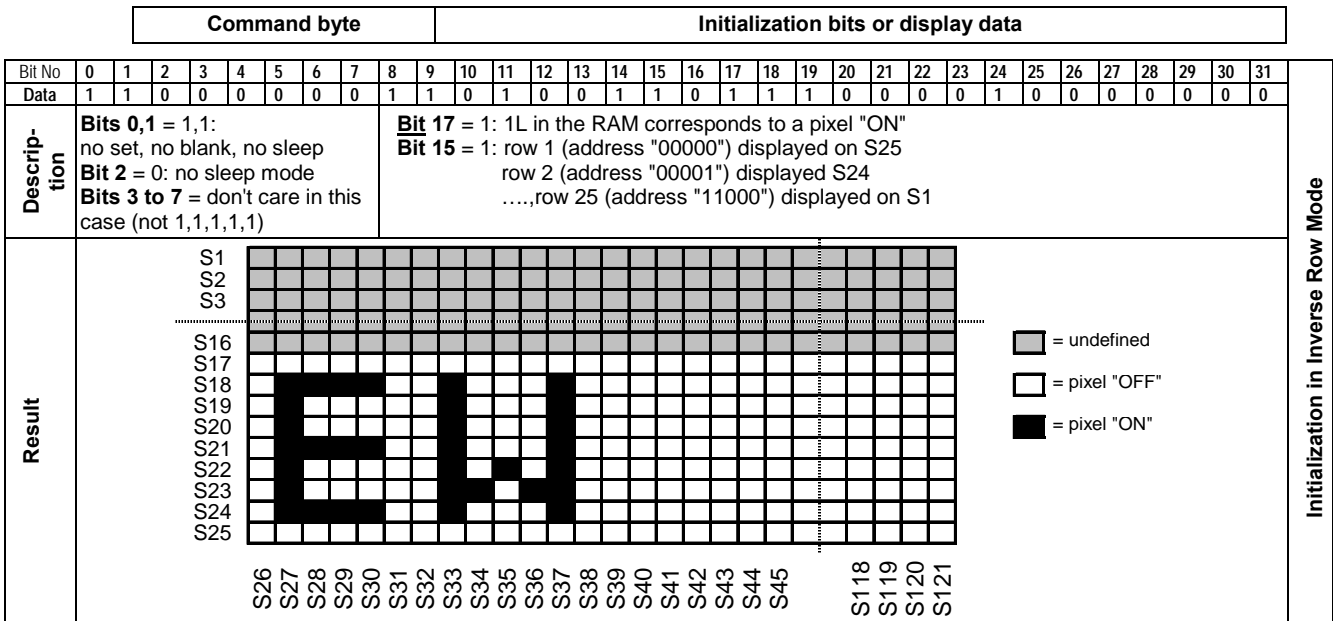


Fig. 18.12

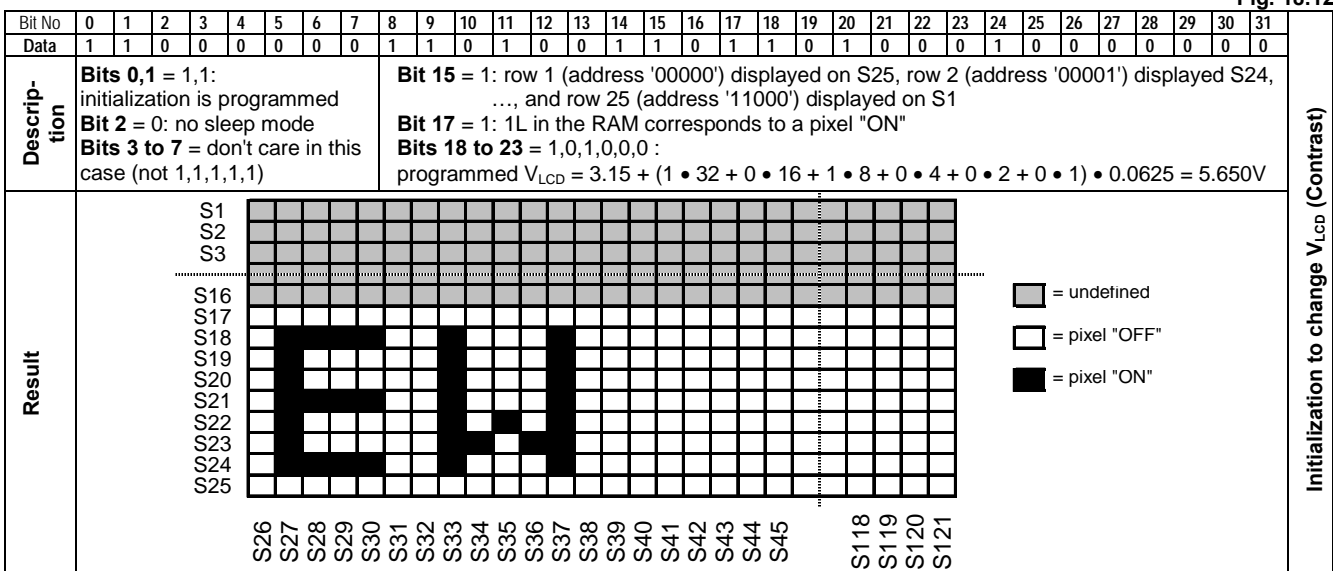


Fig. 18.13

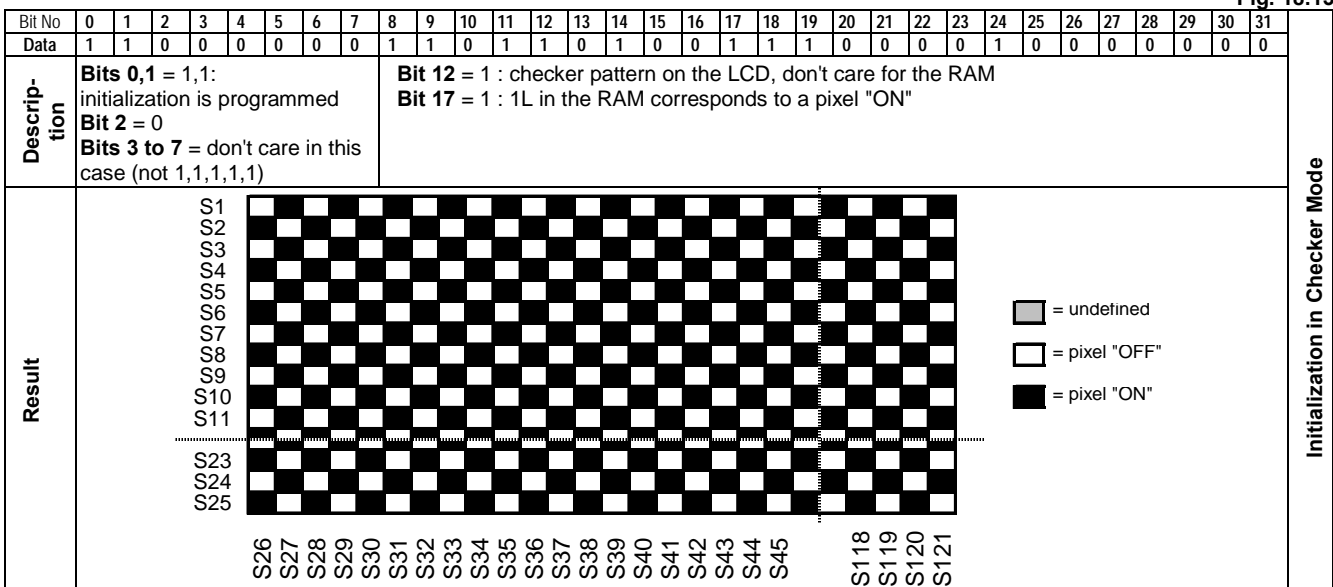


Fig. 18.14

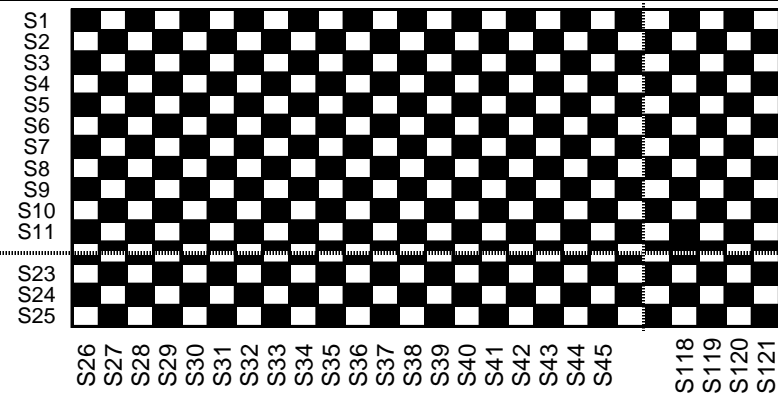
| Command byte     |  |   |   |   |   |   |   | Initialization bits or display data |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|--|---|---|---|---|---|---|-------------------------------------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Bit No           | 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7                                   | 8   | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| Data             | 1  | 1 | 0 | 0 | 0 | 0 | 0 | 0                                   | 1   | 1 | 0  | 1  | 0  | 1  | 1  | 0  | 0  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Descrip-<br>tion | <b>Bits 0,1 = 1,1:</b><br>initialization is programmed<br><b>Bit 2 = 0</b><br><b>Bits 3 to 7 = don't care</b> in this case (not 1,1,1,1,1) |   |   |   |   |   |   |                                     | <b>Bit 13 = 1</b> : checker pattern on the LCD, don't care for the RAM<br><b>Bit 17 = 1</b> : 1L in the RAM corresponds to a pixel "ON"   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Result           |  |   |   |   |   |   |   |                                     |  <p>           S1 S2 S3 S4 S5 S6 S7 S8 S9 S10 S11<br/>           S23 S24 S25<br/>           S26 S27 S28 S29 S30 S31 S32 S33 S34 S35 S36 S37 S38 S39 S40 S41 S42 S43 S44 S45<br/>           S118 S119 S120 S121         </p> <p>           = undefined<br/>           = pixel "OFF"<br/>           = pixel "ON"         </p> |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

Fig. 18.15

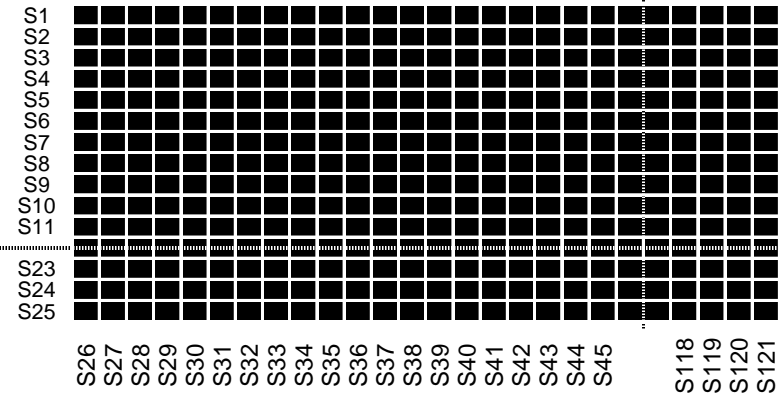
| Command byte     |  |   |   |   |   |   |   | Initialization bits or display data |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|--|---|---|---|---|---|---|-------------------------------------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Bit No           | 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7                                   | 8   | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| Data             | 0  | 1 | 0 | 1 | 1 | 1 | 1 | 1                                   | 0   | 1 | 0  | 1  | 0  | 1  | 1  | 0  | 0  | 1  | 1  | 1  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |    |
| Descrip-<br>tion | <b>Bits 0,1 = 0,1:</b><br>blank is programmed<br><b>Bit 2 = 0</b><br><b>Bits 3 to 7 = 1,1,1,1,1:</b><br>command byte only mode |   |   |   |   |   |   |                                     |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Result           |  |   |   |   |   |   |   |                                     |  <p>           S1 S2 S3 S4 S5 S6 S7 S8 S9 S10 S11<br/>           S23 S24 S25<br/>           S26 S27 S28 S29 S30 S31 S32 S33 S34 S35 S36 S37 S38 S39 S40 S41 S42 S43 S44 S45<br/>           S118 S119 S120 S121         </p> <p>           = undefined<br/>           = pixel "OFF"<br/>           = pixel "ON"         </p> |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

Fig. 18.16

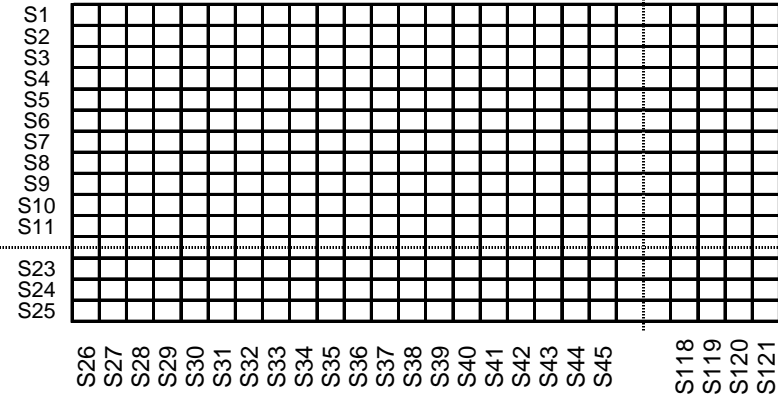
| Command byte     |  |   |   |   |   |   |   | Initialization bits or display data |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|--|---|---|---|---|---|---|-------------------------------------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Bit No           | 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7                                   | 8   | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| Data             | 1  | 0 | 0 | 1 | 1 | 1 | 1 | 1                                   | 0   | 1 | 0  | 1  | 0  | 1  | 1  | 0  | 0  | 1  | 1  | 1  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |    |
| Descrip-<br>tion | <b>Bits 0,1 = 1,0:</b><br>blank is programmed<br><b>Bit 2 = 0</b><br><b>Bits 3 to 7 = 1,1,1,1,1:</b><br>command byte only mode |   |   |   |   |   |   |                                     |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Result           |  |   |   |   |   |   |   |                                     |  <p>           S1 S2 S3 S4 S5 S6 S7 S8 S9 S10 S11<br/>           S23 S24 S25<br/>           S26 S27 S28 S29 S30 S31 S32 S33 S34 S35 S36 S37 S38 S39 S40 S41 S42 S43 S44 S45<br/>           S118 S119 S120 S121         </p> <p>           = undefined<br/>           = pixel "OFF"<br/>           = pixel "ON"         </p> |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

Fig. 18.17

## Applications

Two EM6124 work in parallel to drive up to 50 rows x 96 columns or 25 rows x 212 columns as below

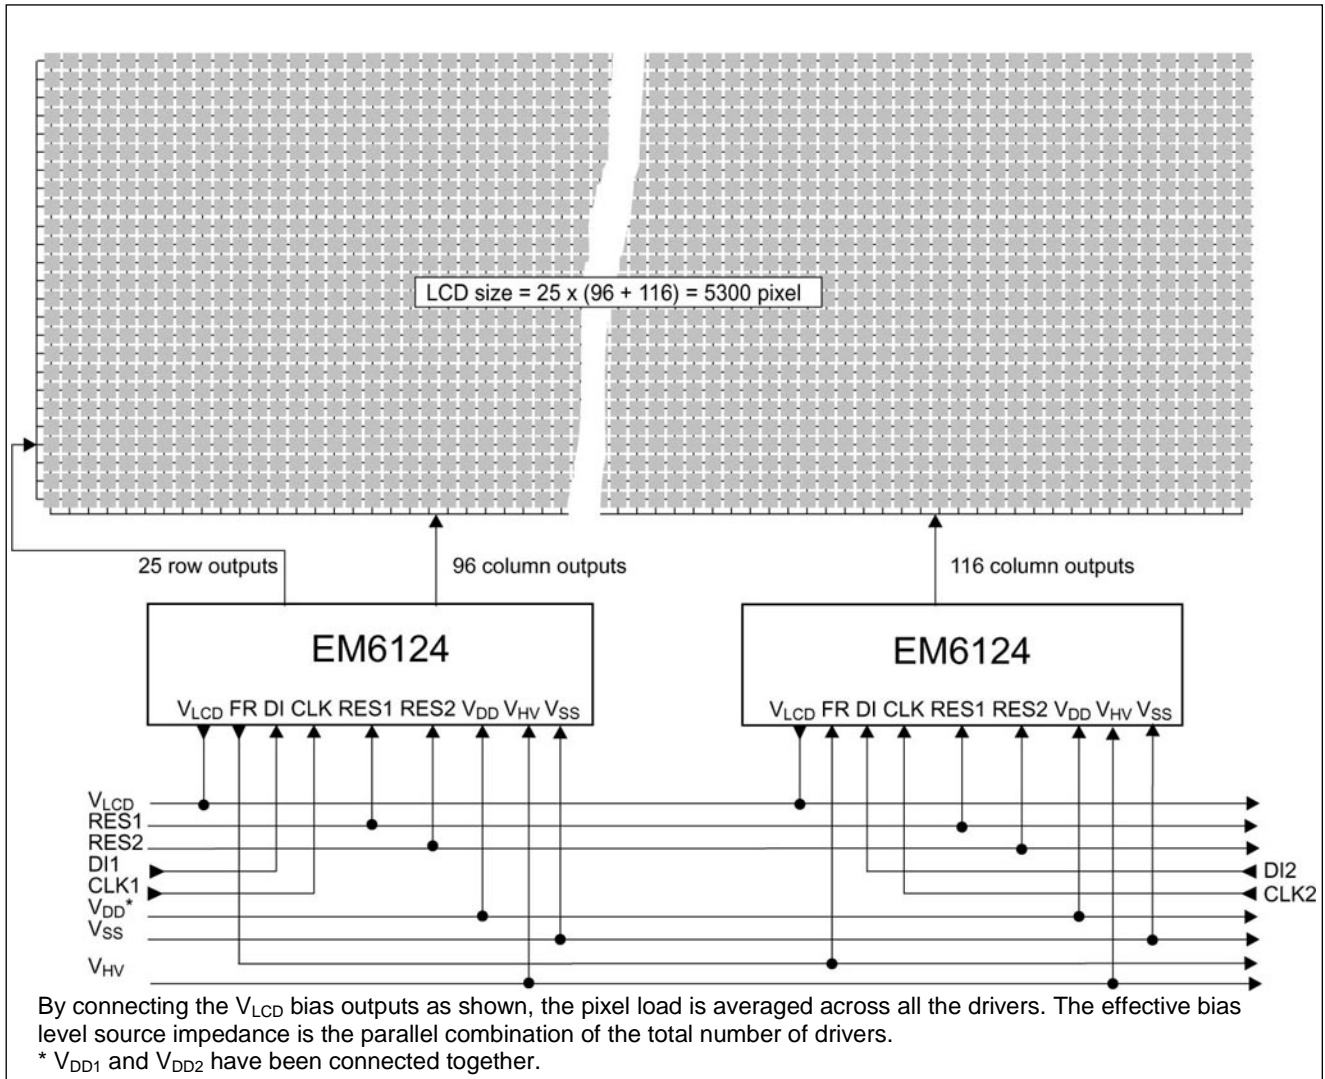


Fig. 19

## Contacting Power Supply

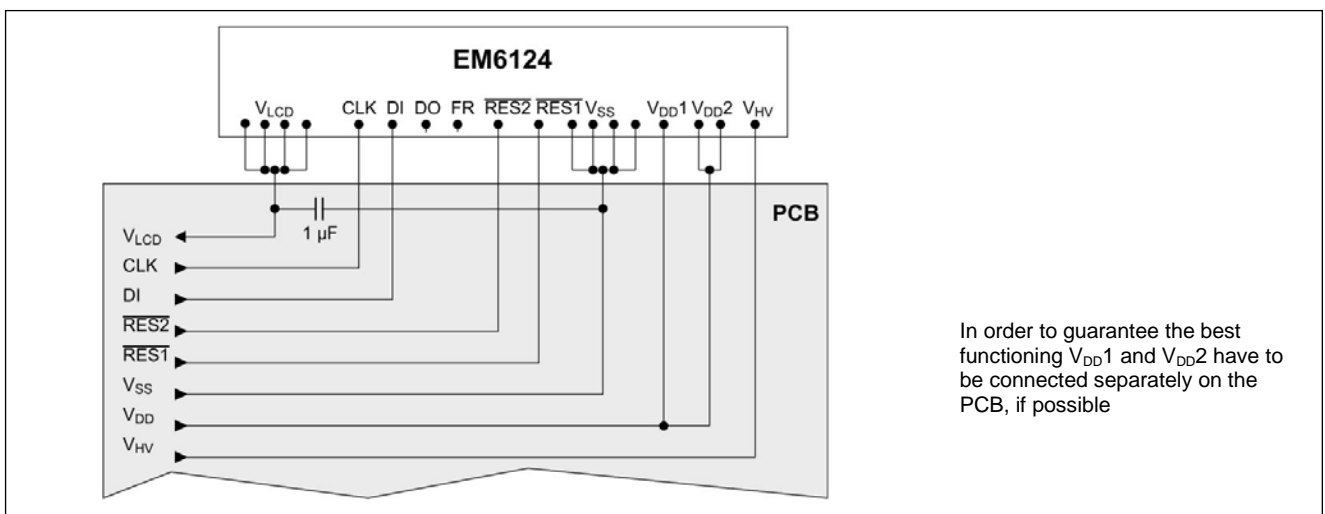


Fig. 20



## Applications

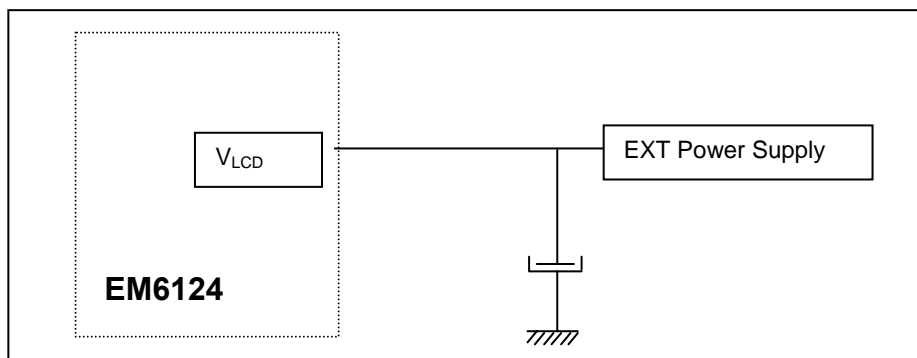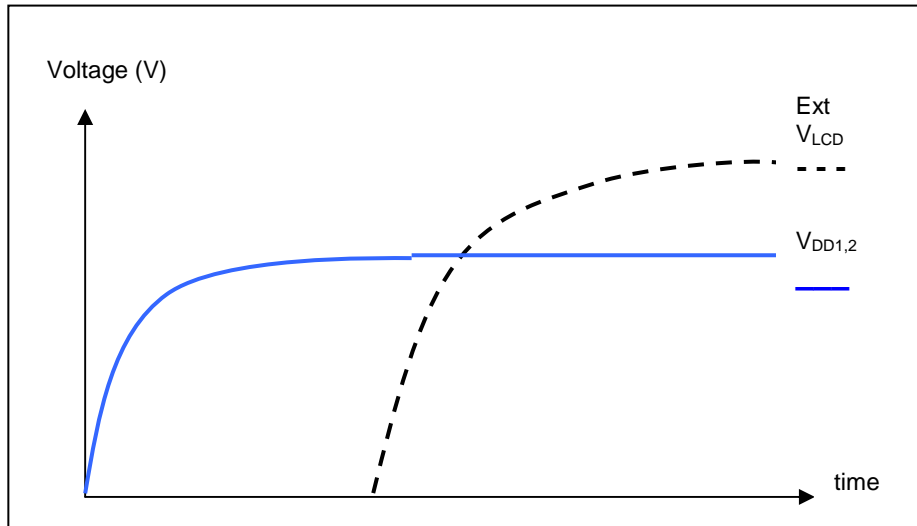Recommended flow to use EM6124 with external VLCD power supply.

### Power Supplies:

-VHV pad should be connected to GND.

- Power should be applied first on VDD1,2 then on VLCD (external).




### Initialization sequence method:

The software should be adapted to avoid high current consumption.

If external  $V_{LCD}$  is lower than the internally generated  $V_{LCD}$  then EM6124 will understand that the level set by the user is not achieved and it will increase the current to achieve the requested level.

For this reason  $V_{LCD}$  step (bit18 to 23) should be set to "000000b" which means 3V then the minimum voltage.



# EM6124

## Dimensions of Chip Form and Bumped Die

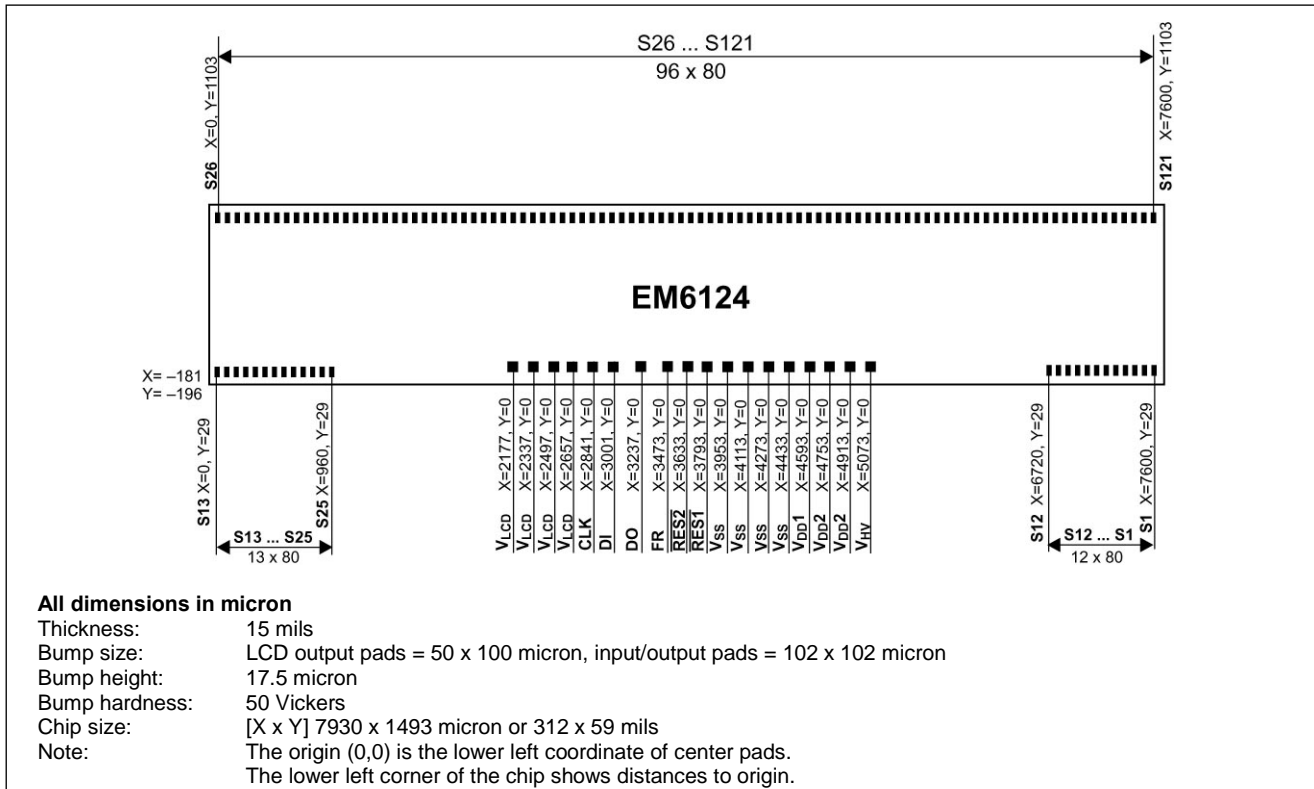


Fig. 21

## Ordering Information

When ordering, please specify the complete Part Number

| Part Number   | Recommended for cascaded applications (see p.16) | Die Form                              | Bumping         |
|---------------|--|---------------------------------------|-----------------|
| EM6124V1WP15E | Yes  | Die in waffle pack, 15 mils thickness | With gold bumps |
| EM6124V2WP15E | No   | Die in waffle pack, 15 mils thickness | With gold bumps |

For other delivery form in die (with or without bumps), please contact EM Microelectronic-Marín S.A.  
 Minimum order quantity might apply.

EM Microelectronic-Marín SA cannot assume responsibility for use of any circuitry described other than circuitry entirely embodied in an EM Microelectronic-Marín SA product. EM Microelectronic-Marín SA reserves the right to change the circuitry and specifications without notice at any time. You are strongly urged to ensure that the information given has not been superseded by a more up-to-date version.