

**1.4KESD5.0
thru
1.4KESD170A**

Features

1. Protects Sensitive Circuits From Short Duration Fast Rise Time Transients such as Electro-Static-Discharge (ESD) or Electrical Fast Transients (EFT).
2. Excellent Protection in Clamping Direct ESD Level Transients* in Excess of 15,000 Volts.
3. Absorbs ESD Level Transients* of 1400 Watts or One Microsecond Transients** up to 400 Watts. See Figure #1 For Overall Transient Peak Pulse Power.
4. Clamps Transients in 1 Pico Second.
5. 0.5 Watt Continuous Power Dissipation.
6. Working (Stand-off) Voltage Range of 5V to 170V.
7. Hermetic DO-35 Package. Also Available in Surface Mount DO-213AA (MELF).
8. Low Inherent Capacitance for High Frequency Application (See Figure #4).

These devices feature the ability to clamp dangerous high voltage short term transients such as produced by directed or radiated electro-static-discharge phenomena before entering sensitive component regions of a circuit design. They are small economical transient voltage suppressors targeted primarily for short term transients below a few microseconds while still achieving significant peak-pulse-power capability as seen in Figure #1.

Maximum Ratings

1. 400 Watts for One Microsecond Square Wave or 1400 Watts Per ESD Wave Form of MIL-STD-750, Method 1020.
2. See Surge Rating Curve in Figures #1, 2 and 3.
3. Operating and Storage Temperature -65° to 200°C
4. DC Power Dissipation 500 mW at $T_L = 75^\circ\text{C}$, .375" From Body.
5. Derate at 2.3 W / °C Above 25°C For P_{pp} (1 μs) and at 5 mW / °C Above 100°C for dc Power.
6. Forward Surge Current 50 amps for 1 μs at $T_L = 25^\circ\text{C}$ (rise time ≥ 100 ns).


Electrical Characteristics

TYPE NUMBER	REVERSE STAND-OFF VOLTAGE	BREAK DOWN VOLTAGE VBR MINIMUM	TEST CURRENT	MAXIMUM REVERSE LEAKAGE	MAXIMUM CLAMPING VOLTAGE	PEAK PULSE CURRENT
	V_{wm}	$V_{(BR)}$	I_T	$I_D @ V_{wm}$	$V_C @ I_{pp}$	I_{pp}^{**}
	VOLTS	VOLTS	mA	μA	VOLTS	AMPS
1.4KESD5.0	5.0	6.40	10	600	13.7	29.20
1.4KESD5.0A	5.0	6.40	10	600	13.2	29.85
1.4KESD6.0	6.0	6.67	10	600	14.8	27.00
1.4KESD6.0A	6.0	6.67	10	600	14.0	28.50
1.4KESD6.5	6.5	7.22	10	400	16.0	24.94
1.4KESD6.5A	6.5	7.22	10	400	15.2	26.32
1.4KESD7.0	7.0	7.78	10	150	17.3	23.12
1.4KESD7.0A	7.0	7.78	10	150	16.4	24.42
1.4KESD7.5	7.5	8.33	1.0	50	18.5	21.57
1.4KESD7.5A	7.5	8.33	1.0	50	17.5	22.81
1.4KESD8.0	8.0	8.89	1.0	25	19.8	20.20
1.4KESD8.0A	8.0	8.89	1.0	25	18.7	21.37
1.4KESD8.5	8.5	9.44	1.0	5	20.9	19.10
1.4KESD8.5A	8.5	9.44	1.0	5	19.8	20.16
1.4KESD9.0	9.0	10.0	1.0	1.0	22.2	18.02

* Pulse wave form of MIL-STD-750, Method 1020. (Approximately 150 ns exponential wave.)

**At 400 watts 1 μs square wave rating (See Figures 1 and 2).

AXIAL LEAD

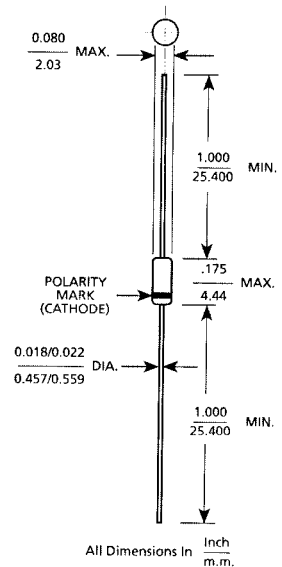

DO-35

Mechanical Characteristics

CASE: Hermetically sealed glass case DO-35.

FINISH: All external surfaces are corrosion resistant and leads solderable.

THERMAL RESISTANCE: 200°C / Watt typical for DO-35 at 0.375 inches from body.

POLARITY: Banded end is cathode.

WEIGHT: 0.2 grams (typical).

Electrical Characteristics

1.4KESD5.0 thru 1.4KESD170A

TYPE NUMBER	REVERSE STAND-OFF VOLTAGE	BREAK DOWN VOLTAGE V _{BR} MINIMUM	TEST CURRENT	MAXIMUM REVERSE LEAKAGE	MAXIMUM CLAMPING VOLTAGE	PEAK PULSE CURRENT
	V _{RM}	V _{BR}				
	VOLTS	VOLTS	mA	μA	VOLTS	AMPS
1.4KESD9.0A	9.0	10.0	1.0	1.0	21.1	18.96
1.4KESD10	10	11.1	1.0	1.0	24.7	16.19
1.4KESD10A	10	11.1	1.0	1.0	23.4	17.09
1.4KESD11	11	12.2	1.0	1.0	27.1	14.76
1.4KESD11A	11	12.2	1.0	1.0	25.7	15.56
1.4KESD12	12	13.3	1.0	1.0	29.6	13.51
1.4KESD12A	12	13.3	1.0	1.0	28.0	14.29
1.4KESD13	13	14.4	1.0	1.0	32.0	12.50
1.4KESD13A	13	14.4	1.0	1.0	30.3	13.20
1.4KESD14	14	15.6	1.0	1.0	31.2	12.81
1.4KESD14A	14	15.6	1.0	1.0	29.5	13.60
1.4KESD15	15	16.7	1.0	1.0	33.4	11.98
1.4KESD15A	15	16.7	1.0	1.0	31.7	12.63
1.4KESD16	16	17.8	1.0	1.0	35.6	11.22
1.4KESD16A	16	17.8	1.0	1.0	33.8	11.85
1.4KESD17	17	18.9	1.0	1.0	37.8	10.58
1.4KESD17A	17	18.9	1.0	1.0	35.8	11.17
1.4KESD18	18	20.0	1.0	1.0	40.0	10.00
1.4KESD18A	18	20.0	1.0	1.0	37.9	10.56
1.4KESD20	20	22.2	1.0	1.0	44.4	9.02
1.4KESD20A	20	22.2	1.0	1.0	42.0	9.52
1.4KESD22	22	24.4	1.0	1.0	48.8	8.20
1.4KESD22A	22	24.4	1.0	1.0	46.2	8.66
1.4KESD24	24	26.7	1.0	1.0	53.4	7.49
1.4KESD24A	24	26.7	1.0	1.0	50.6	7.91
1.4KESD26	26	28.9	1.0	1.0	57.8	6.93
1.4KESD26A	26	28.9	1.0	1.0	54.7	7.31
1.4KESD28	28	31.1	1.0	1.0	62.2	6.43
1.4KESD28A	28	31.1	1.0	1.0	59.0	6.79
1.4KESD30	30	33.3	1.0	1.0	66.6	6.01
1.4KESD30A	30	33.3	1.0	1.0	63.1	6.34
1.4KESD33	33	36.7	1.0	1.0	73.4	5.45
1.4KESD33A	33	36.7	1.0	1.0	69.6	5.75
1.4KESD36	36	40.0	1.0	1.0	80.0	5.00
1.4KESD36A	36	40.0	1.0	1.0	75.8	5.28
1.4KESD40	40	44.4	1.0	1.0	88.8	4.50
1.4KESD40A	40	44.4	1.0	1.0	84.2	4.75
1.4KESD43	43	47.8	1.0	1.0	95.6	4.18
1.4KESD43A	43	47.8	1.0	1.0	90.5	4.42
1.4KESD45	45	50.0	1.0	1.0	100.0	4.00
1.4KESD45A	45	50.0	1.0	1.0	94.8	4.22
1.4KESD48	48	53.3	1.0	1.0	106.6	3.75
1.4KESD48A	48	53.3	1.0	1.0	101.0	3.96
1.4KESD51	51	56.7	1.0	1.0	113.4	3.53
1.4KESD51A	51	56.7	1.0	1.0	107.5	3.72
1.4KESD54	54	60.0	1.0	1.0	120.0	3.33
1.4KESD54A	54	60.0	1.0	1.0	113.7	3.52
1.4KESD58	58	64.4	1.0	1.0	128.9	3.10
1.4KESD58A	58	64.4	1.0	1.0	122.0	3.28
1.4KESD60	60	66.7	1.0	1.0	133.1	3.00
1.4KESD60A	60	66.7	1.0	1.0	126.4	3.17
1.4KESD64	64	71.1	1.0	1.0	142.2	2.81
1.4KESD64A	64	71.1	1.0	1.0	134.7	2.97
1.4KESD70	70	77.8	1.0	1.0	155.6	2.57
1.4KESD70A	70	77.8	1.0	1.0	147.4	2.71
1.4KESD75	75	83.3	1.0	1.0	166.8	2.40
1.4KESD75A	75	83.3	1.0	1.0	158.0	2.53
1.4KESD78	78	86.7	1.0	1.0	173.4	2.31
1.4KESD78A	78	86.7	1.0	1.0	164.3	2.44
1.4KESD85	85	94.4	1.0	1.0	188.5	2.12
1.4KESD85A	85	94.4	1.0	1.0	178.6	2.24
1.4KESD90	90	100.0	1.0	1.0	199.8	2.00
1.4KESD90A	90	100.0	1.0	1.0	189.9	2.11
1.4KESD100	100	111.0	1.0	1.0	222.3	1.80
1.4KESD100A	100	111.0	1.0	1.0	210.6	1.90
1.4KESD110	110	122.0	1.0	1.0	243.9	1.64
1.4KESD110A	110	122.0	1.0	1.0	213.3	1.73
1.4KESD120	120	133.0	1.0	1.0	266.4	1.50
1.4KESD120A	120	133.0	1.0	1.0	252.0	1.59
1.4KESD130	130	144.0	1.0	1.0	288.0	1.39
1.4KESD130A	130	144.0	1.0	1.0	273.0	1.47
1.4KESD150	150	167.0	1.0	1.0	333.9	1.20
1.4KESD150A	150	167.0	1.0	1.0	316.8	1.26
1.4KESD160	160	178.0	1.0	1.0	356.4	1.12
1.4KESD160A	160	178.0	1.0	1.0	337.5	1.19
1.4KESD170	170	189.0	1.0	1.0	378.0	1.06
1.4KESD170A	170	189.0	1.0	1.0	358.2	1.12

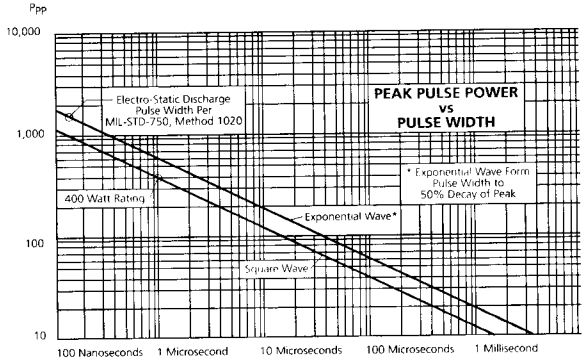


Figure 1

Clamping Factor vs Breakdown Voltage For Various Power Levels

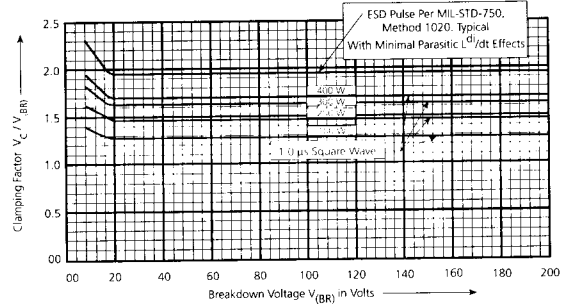


Figure 2

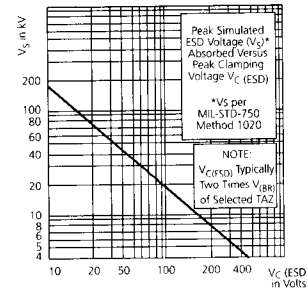


Figure 3

Capacitance vs. V_{BR} Curve

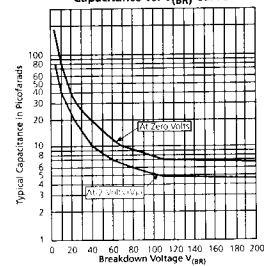


Figure 4