

NON-ISOLATED DC/DC CONVERTERS

5V Input / 1.2V – 3.3V Output / 12A



BP02S7DB-12B

S7DB-12B Series

- Nonisolated
- Compact, low profile surface mount package
- Fixed frequency
- High efficiency means less power dissipation
- Excellent thermal performance
- Optimized for cost
- Remote on/off
- Undervoltage lockout (UVLO)
- Over current and short circuit protection
- Remote sense



Description

The Bel S7DB-12B modules are a series of non-isolated, step down DC/DC power converters that operate from a nominal 5V source. These converters are available in a range of output voltages from 1.2V to 3.3V. They are packaged in a compact, low profile, surface mount DIP package for ease of layout and space savings. 12A maximum output is also provided. Standard features include remote on/off, remote sense, over current and short circuit protection, UVLO and output voltage adjust. These products may be used almost anywhere low voltage silicon is employed and a 5V source is available. Typical applications include file servers, routers, line cards and other computing and communications equipment.

Applications

- Distributed power architectures
- Data networking equipment
- Telecommunications
- Computers and peripherals

Part Number Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number
3.3V	5V	12A	39.6W	92%	S7DB-12B330
2.5V	5V	12A	30.0W	90%	S7DB-12B250
1.8V	5V	12A	21.6W	86%	S7DB-12B180
1.5V	5V	12A	18.0W	84%	S7DB-12B150
1.2V	5V	12A	14.4W	82%	S7DB-12B120

BP02S7DB-12B

Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Continuous Input Voltage	Vin	-0.3		6	V
Output Enable Terminal Voltage	Vouten	-0.3		6	V
Ambient Temperature	Tamb	-40		85	°C
Storage Temperature	Tstor	-55		100	°C

Note: Use beyond the maximum ratings may cause a reliability degradation of the DC/DC converter or may permanently damage the device.

Input Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Operating Input Voltage	All	Vin	4.5	5	5.5	V
Input Current	3.3V 2.5V 1.8V 1.5V 1.2V	Iin			11.2 8.7 6.6 5.5 4.5	A
No Load Input Current	All			50		mA
Remote Off Input Current				10	20	mA
Input Reflected Ripple Current ¹	All			40	80	mA _{rms}
Input Reflected Ripple Current (P-P) ¹	All			140	280	mApk
I ² t Inrush Current Transient	All			0.1	0.2	A ² s
Turn On Voltage Threshold	All			4.3	4.5	V
Turn Off Voltage Threshold	All			3.85	4.49	V

Note: Input capacitance two 270µF/10V, ESR = 0.018 Ω max at 100kHz @ 25° C.

1. With simulated source impedance of 500nH, 5Hz to 20MHz.

NON-ISOLATED DC/DC CONVERTERS

5V Input / 1.2V – 3.3V Output / 12A



BP02S7DB-12B

Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Output Voltage Set Point ¹	3.3V	Vout	3.234	3.3	3.366	V
	2.5V		2.45	2.5	2.55	
	1.8V		1.764	1.8	1.836	
	1.5V		1.47	1.5	1.53	
	1.2V		1.176	1.2	1.224	
Load Regulation	3.3V			6.0	12	mV
	2.5V			6.0	12	
	1.8V			6.0	10	
	1.5V			6.0	10	
	1.2V			6.0	10	
Line Regulation	All			2.0	5	mV
Regulation Over Temperature	3.3V			22	45	mV
	2.5V			17	34	
	1.8V			12	25	
	1.5V			10	20	
	1.2V			8	17	
Total Output Voltage Regulation	3.3V				62	mV
	2.5V				51	
	1.8V				40	
	1.5V				35	
	1.2V				32	
Output Ripple and Noise ²	All			30	60	mVp-p
Output Ripple and Noise ²	All			10	25	mVrms
Output Current Range	All	Iout	0		12	A
Output DC Current Limit	All	Ioutlim	15.6		30	A
Short Circuit Surge	3.3V	Ioutsurge		0.25	0.5	A ² s
	2.5V			0.3	0.6	
	1.8V			0.35	0.7	
	1.5V			0.45	0.9	
	1.2V			0.5	1	
Turn on Time	All	Ton		12	20	ms
Overshoot at Turn On	All			0	3%	V
Output Capacitance	All	Cout	0		4800	μF

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

1. Vin = 5V, Iout = full load, Ta = 25° C.

2. 0 - 20MHz, 1μF ceramic cap and 10μF aluminum cap on output.

BP02S7DB-12B

Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Transient Response ³						
ΔV 50% to 100% of Max Load	3.3V			90	120	mV
Settling Time		Ts		35	70	μs
ΔV 100% to 50% of Max Load				90	120	mV
Settling Time		Ts		35	70	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	2.5V			90	120	mV
Settling Time		Ts		35	70	μs
ΔV 100% to 50% of Max Load				90	120	mV
Settling Time		Ts		35	70	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	1.8V			90	120	mV
Settling Time		Ts		35	70	μs
ΔV 100% to 50% of Max Load				90	120	mV
Settling Time		Ts		35	70	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	1.5V			90	120	mV
Settling Time		Ts		35	70	μs
ΔV 100% to 50% of Max Load				90	120	mV
Settling Time		Ts		35	70	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	1.2V			90	120	mV
Settling Time		Ts		35	70	μs
ΔV 100% to 50% of Max Load				90	120	mV
Settling Time		Ts		35	70	μs

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.
 3. di/dt = 0.5A/1 μ S, Ta = 25° C without external load capacitance.

NON-ISOLATED DC/DC CONVERTERS

5V Input / 1.2V – 3.3V Output / 12A



BP02S7DB-12B

General Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Efficiency ¹	3.3V	η	89	92		%
	2.5V		87	90		
	1.8V		83	86		
	1.5V		81	84		
	1.2V		89	82		
Switching Frequency	All	Fsw	260	300	340	kHz
Output Voltage Trim Range ²	All		90		110	%
Remote Sense Compensation	All				10	%
Weight	All			10.5		g

1. Vin=5V, full load and Ta=25° C.
2. See graphs on pages 10-12.






Control Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Remote On/Off ³	All	Vouten				V
Signal Low (Unit On)	All		0		1	V
Signal High (Unit Off)	All		2.5		5.5	V

3. With remote on/off pin 8 open, the module is on.

BP02S7DB-12B

Efficiency Data

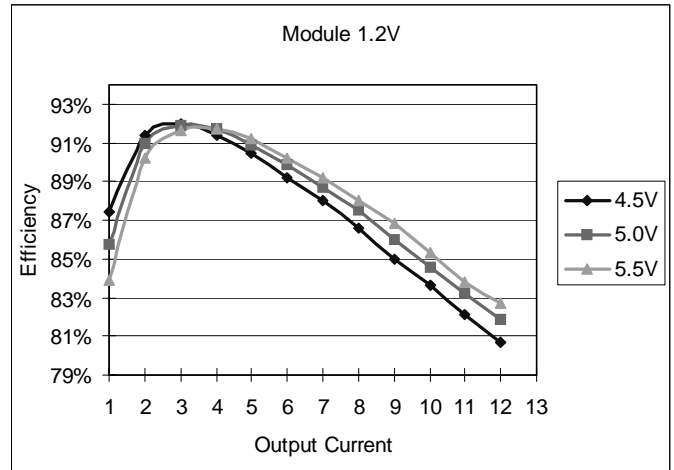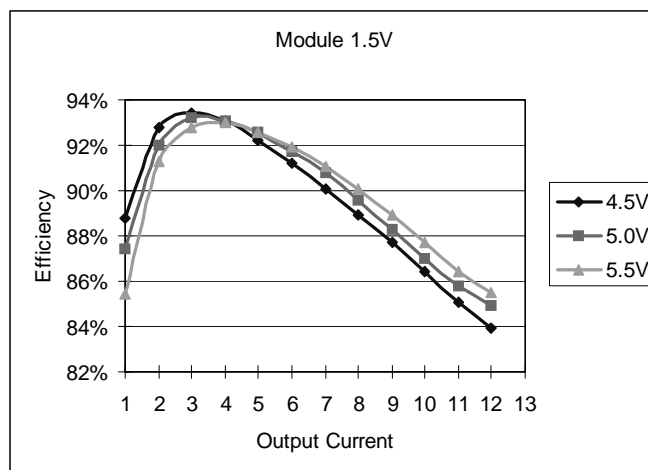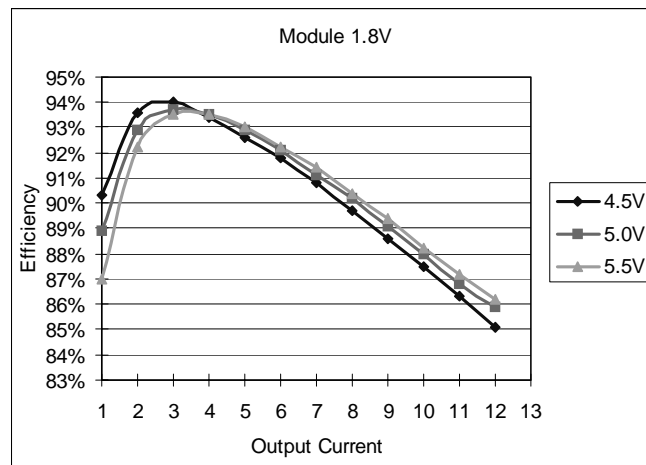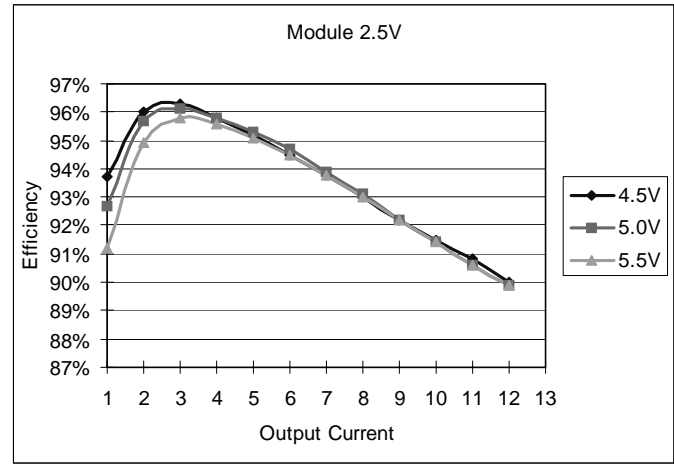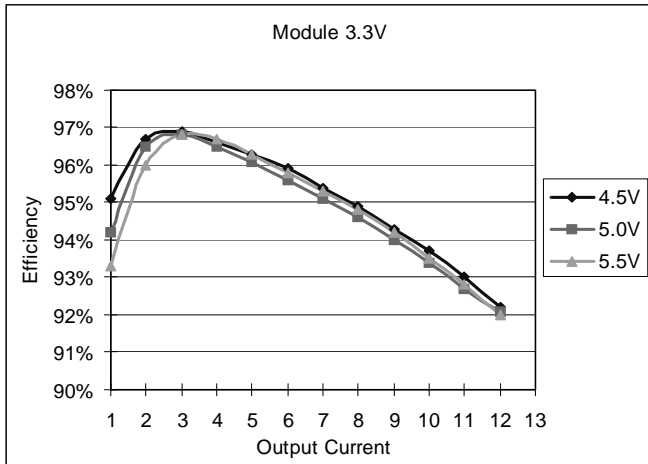

NON-ISOLATED DC/DC CONVERTERS


5V Input / 1.2V – 3.3V Output / 12A




BP02S7DB-12B

Ripple and Noise


1 μ F ceramic cap and 10 μ F aluminum electrolytic cap added at the output.

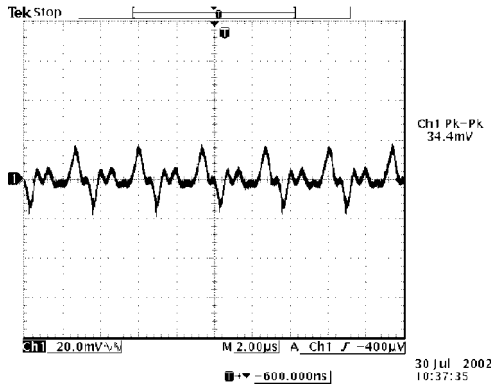


Ripple and noise at full load and 5Vdc input, 3.3Vdc output and Ta=25° C

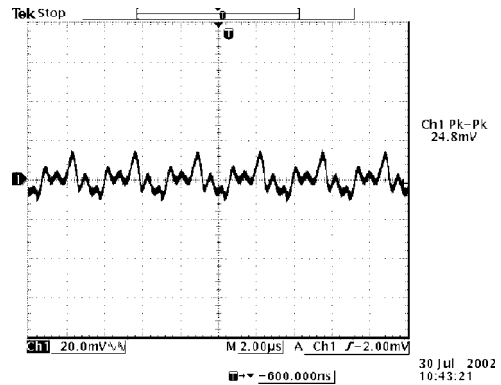


Ripple and noise at full load and 5Vdc input, 2.5Vdc output and Ta=25° C

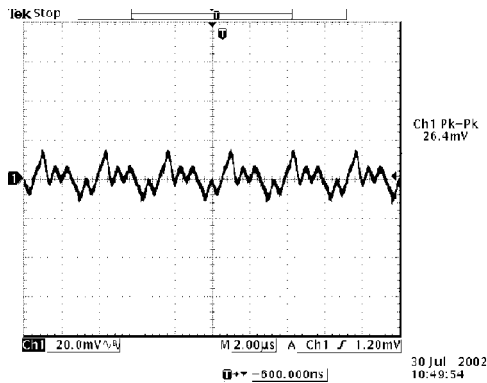

Ripple and noise at full load and 5Vdc input, 1.8Vdc output and Ta=25° C

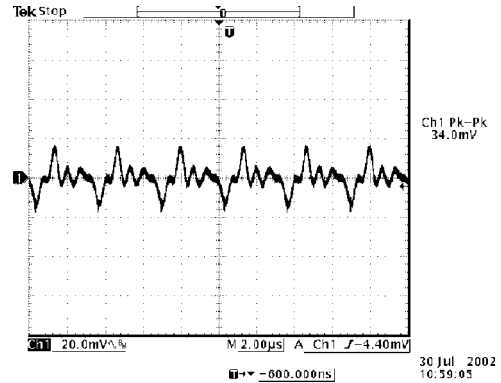

Ripple and noise at full load and 5Vdc input, 1.5Vdc output and Ta=25° C

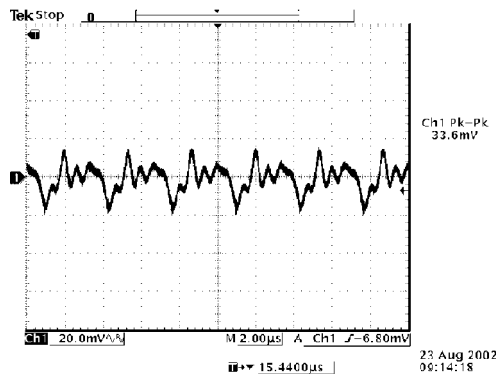


Ripple and noise at full load and 5Vdc input, 1.2Vdc output and Ta=25° C


BP02S7DB-12B

Transient Response


Transient response: $di/dt = 0.5A/\mu S$, no external load capacitance

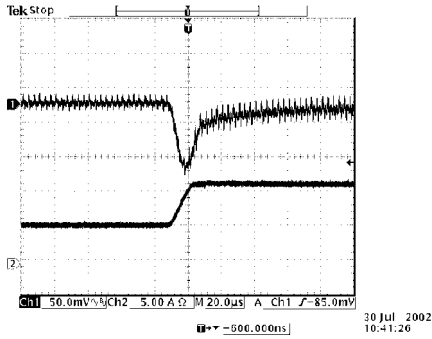


Vout=3.3V
50% to 100% load transients at 5V input and Ta=25° C

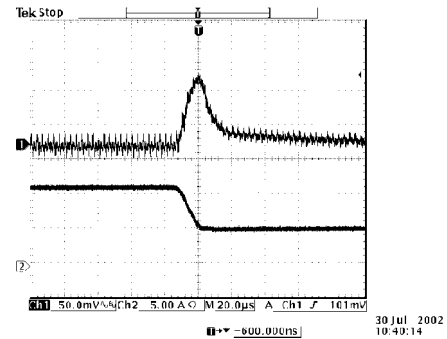


Vout=3.3V
100% to 50% load transients at 5V input and Ta=25° C

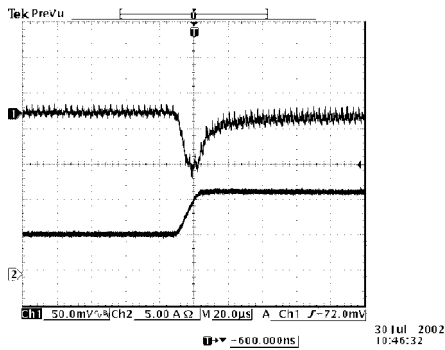


Vout=2.5V
50% to 100% load transients at 5V input and Ta=25° C

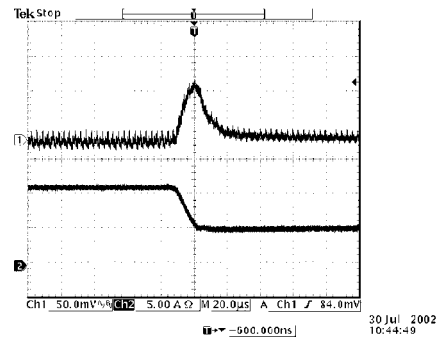

Vout=2.5V
100% to 50% load transients at 5V input and Ta=25° C

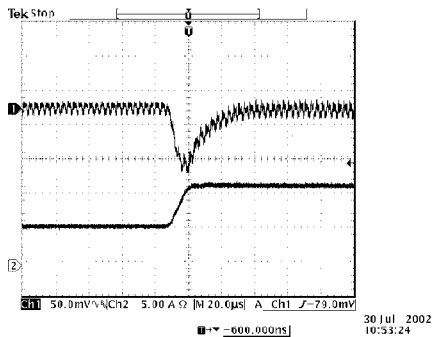

Vout=1.8V
50% to 100% load transients at 5V input and Ta=25° C

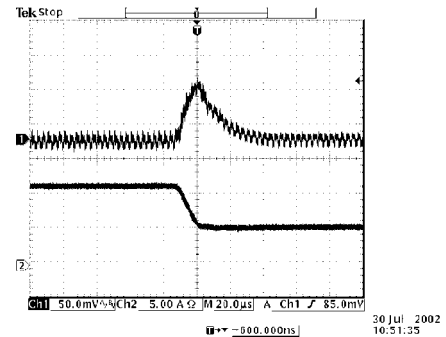

Vout=1.8V
100% to 50% load transients at 5V input and Ta=25° C

NON-ISOLATED DC/DC CONVERTERS



5V Input / 1.2V – 3.3V Output / 12A



BP02S7DB-12B



Transient Response

Transient response: $di/dt = 0.5A/\mu S$, no external load capacitance

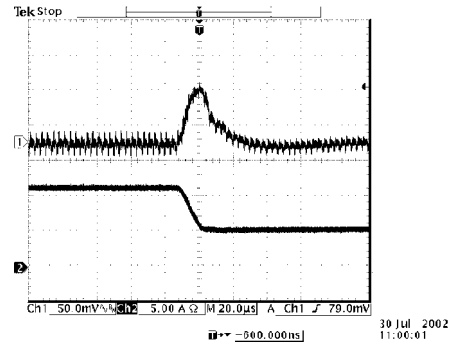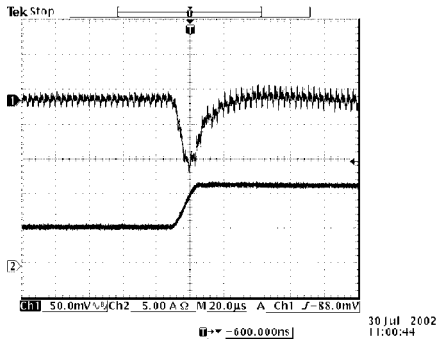

Vout=1.5V
50% to 100% load transients at 5V input and Ta=25° C


Vout=1.5V
100% to 50% load transients at 5V input and Ta=25° C

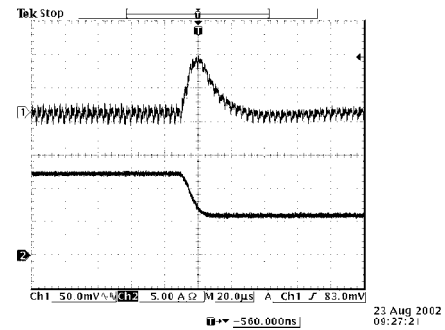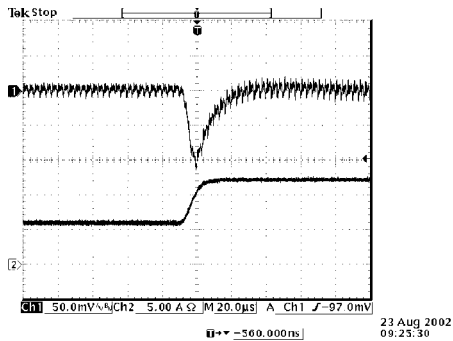

Vout=1.2V
50% to 100% load transients at 5V input and Ta=25° C

Vout=1.2V
100% to 50% load transients at 5V input and Ta=25° C


Thermal Considerations

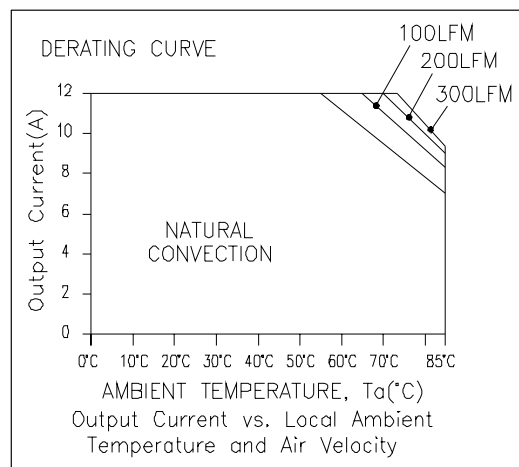


BP02S7DB-12B

Output Voltage Set-Point Adjustment

Trim Down Test Circuit

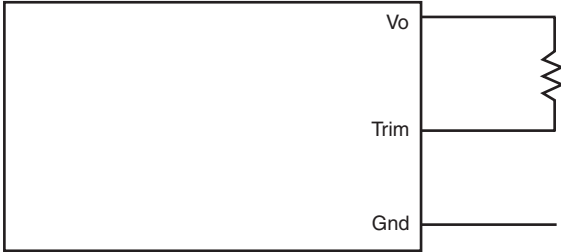

Trim Up Test Circuit

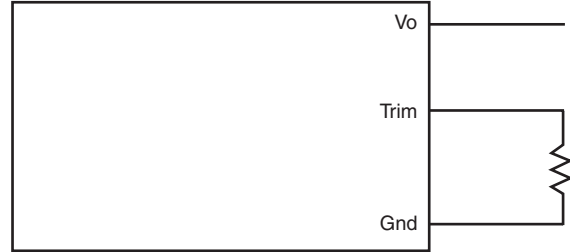


Output Voltage Set-Point Adjustment

S7DB-12B330 Trim Resistor Calculation

$$R_{trim_down} = \left(\frac{7.964}{V_o - V_{o,adj}} - 6.82 \right) \text{Kohm}$$

where,


V_o is the nominal output voltage setpoint when trim pin is open, $V_o=3.312V$
 $V_{o,adj}$ is the adjusted output voltage.
 $R_{trim-down}$ is the resistance required between TRIM and V_o .

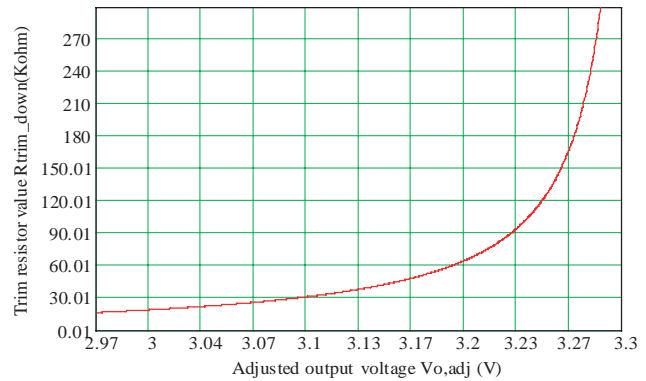

$$R_{trim_up} = \left(\frac{2.536}{V_{o,adj} - V_o} - 3.65 \right) \text{Kohm}$$

where,

V_o is the nominal output voltage setpoint when trim pin is open, $V_o=3.312V$
 $V_{o,adj}$ is the adjusted output voltage.
 $R_{trim-up}$ is the resistance required between TRIM and GND.

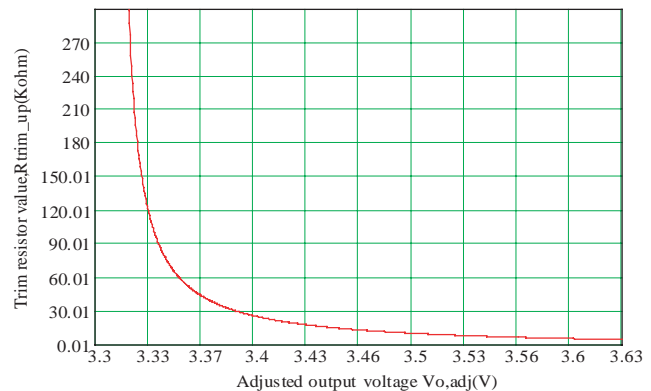

NON-ISOLATED DC/DC CONVERTERS

5V Input / 1.2V – 3.3V Output / 12A



BP02S7DB-12B

Output Voltage Set-Point Adjustment

S7DB-12B250 Trim Resistor Calculation

$$R_{trim_down} = \left(\frac{3.691}{V_o - V_{o,adj}} - 6.8 \right) K\Omega$$



where,

V_o is the nominal output voltage setpoint when trim pin is open, $V_o=2.509V$
 $V_{o,adj}$ is the adjusted output voltage.
 $R_{trim-down}$ is the resistance required between TRIM and V_o .

$$R_{trim_up} = \left(\frac{1.728}{V_{o,adj} - V_o} - 4.64 \right) K\Omega$$

where,

V_o is the nominal output voltage setpoint when trim pin is open, $V_o=2.509V$
 $V_{o,adj}$ is the adjusted output voltage.
 $R_{trim-up}$ is the resistance required between TRIM and GND.

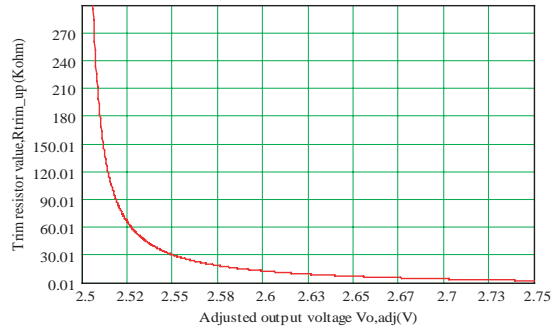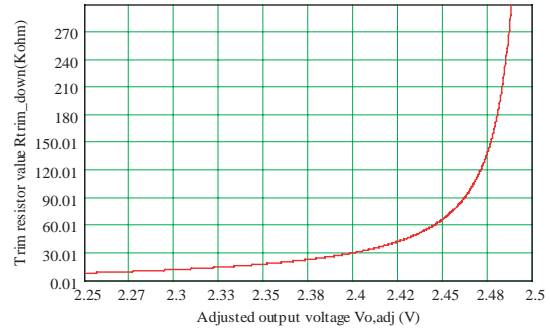

S7DB-12B180 Trim Resistor Calculation

$$R_{trim_down} = \left(\frac{3.869}{V_o - V_{o,adj}} - 13.84 \right) K\Omega$$



where,

V_o is the nominal output voltage setpoint when trim pin is open, $V_o=1.808V$
 $V_{o,adj}$ is the adjusted output voltage.
 $R_{trim-down}$ is the resistance required between TRIM and V_o .

$$R_{trim_up} = \left(\frac{3.072}{V_{o,adj} - V_o} - 10 \right) K\Omega$$

where,

V_o is the nominal output voltage setpoint when trim pin is open, $V_o=1.808V$
 $V_{o,adj}$ is the adjusted output voltage.
 $R_{trim-up}$ is the resistance required between TRIM and GND.

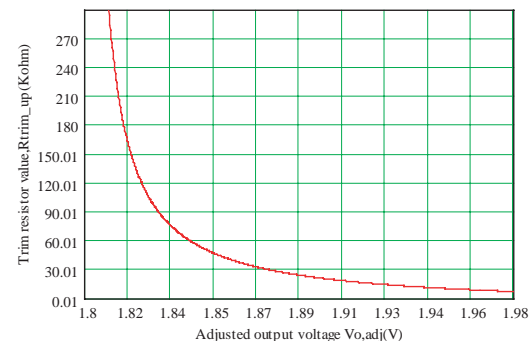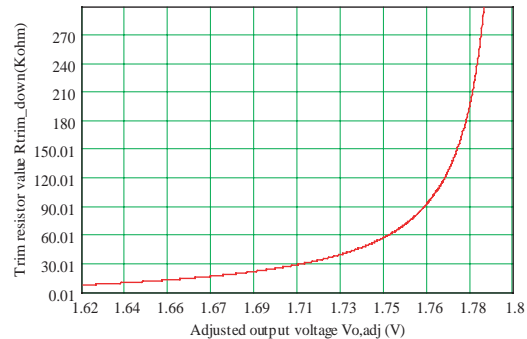

©2004 Bel Fuse Inc. Specifications subject to change without notice. 03.04


BP02S7DB-12B

Output Voltage Set-Point Adjustment

S7DB-12B150 Trim Resistor Calculation


$$R_{trim_down} = \left(\frac{2.716}{V_o - V_{o,adj}} - 11.71 \right) K\Omega$$

where,
 V_o is the nominal output voltage setpoint when trim pin is open, $V_o=1.507V$
 $V_{o,adj}$ is the adjusted output voltage.
 $R_{trim-down}$ is the resistance required between TRIM and V_o .

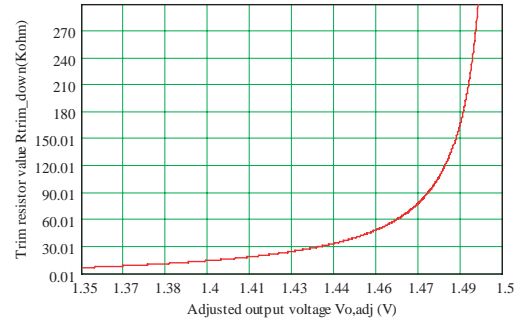

$$R_{trim_up} = \left(\frac{3.072}{V_{o,adj} - V_o} - 7.87 \right) K\Omega$$


where,
 V_o is the nominal output voltage setpoint when trim pin is open, $V_o=1.507V$
 $V_{o,adj}$ is the adjusted output voltage.
 $R_{trim-up}$ is the resistance required between TRIM and GND.

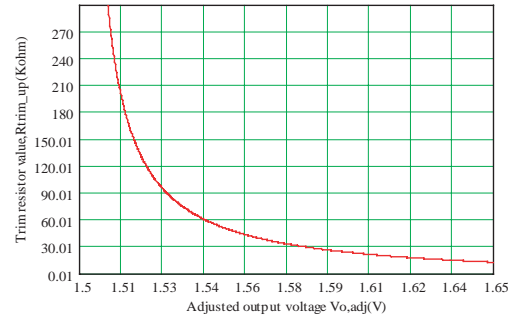

S7DB-12B120 Trim Resistor Calculation


$$R_{trim_down} = \left(\frac{1.562}{V_o - V_{o,adj}} - 8.48 \right) K\Omega$$

where,
 V_o is the nominal output voltage setpoint when trim pin is open, $V_o=1.207V$
 $V_{o,adj}$ is the adjusted output voltage.
 $R_{trim-down}$ is the resistance required between TRIM and V_o .

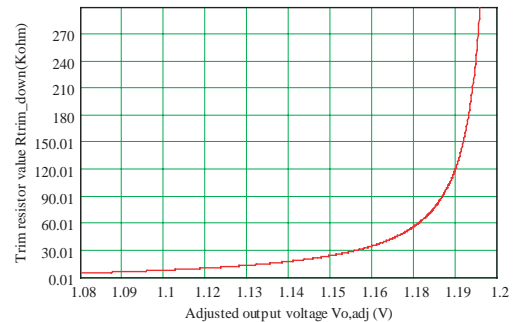

$$R_{trim_up} = \left(\frac{3.072}{V_{o,adj} - V_o} - 4.64 \right) K\Omega$$

where,
 V_o is the nominal output voltage setpoint when trim pin is open, $V_o=1.207V$
 $V_{o,adj}$ is the adjusted output voltage.
 $R_{trim-up}$ is the resistance required between TRIM and GND.

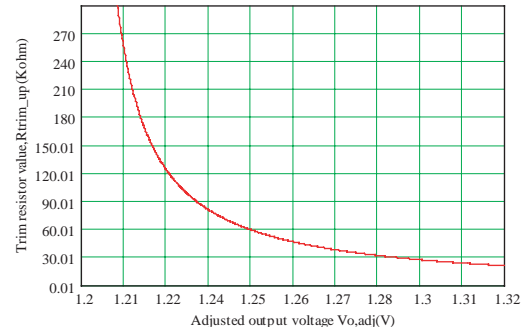





NON-ISOLATED DC/DC CONVERTERS

5V Input / 1.2V – 3.3V Output / 12A




BP02S7DB-12B

Mechanical

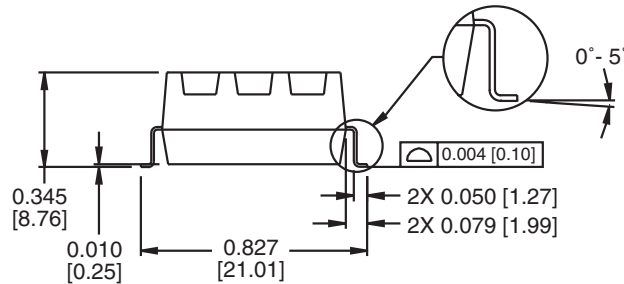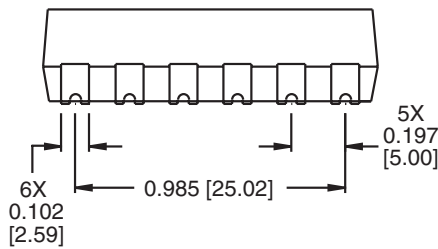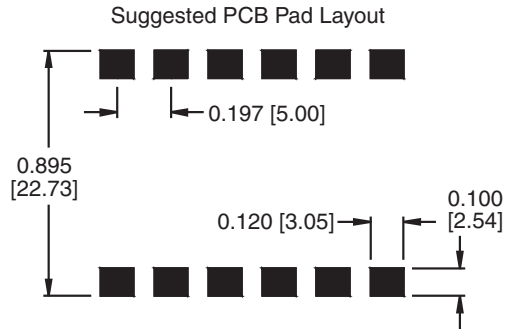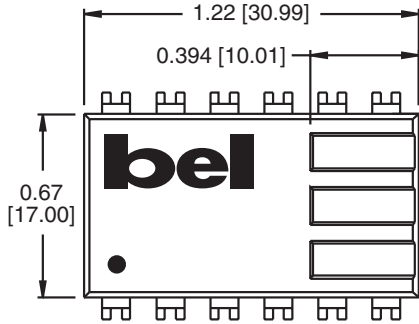

Dimensions are in inches [millimeters].
Standard dimension tolerance is ± 0.005 [0.13] unless otherwise noted.

Pin	Function
1	Ground
2	Ground
3	Ground
4	Ground
5	+Vin
6	+Vin
7	Trim
8	Remote On/Off
9	Remote Sense (+)
10	+Vo
11	+Vo
12	+Vo

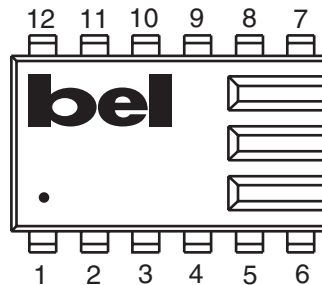

©2004 Bel Fuse Inc. Specifications subject to change without notice. 03.04

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com