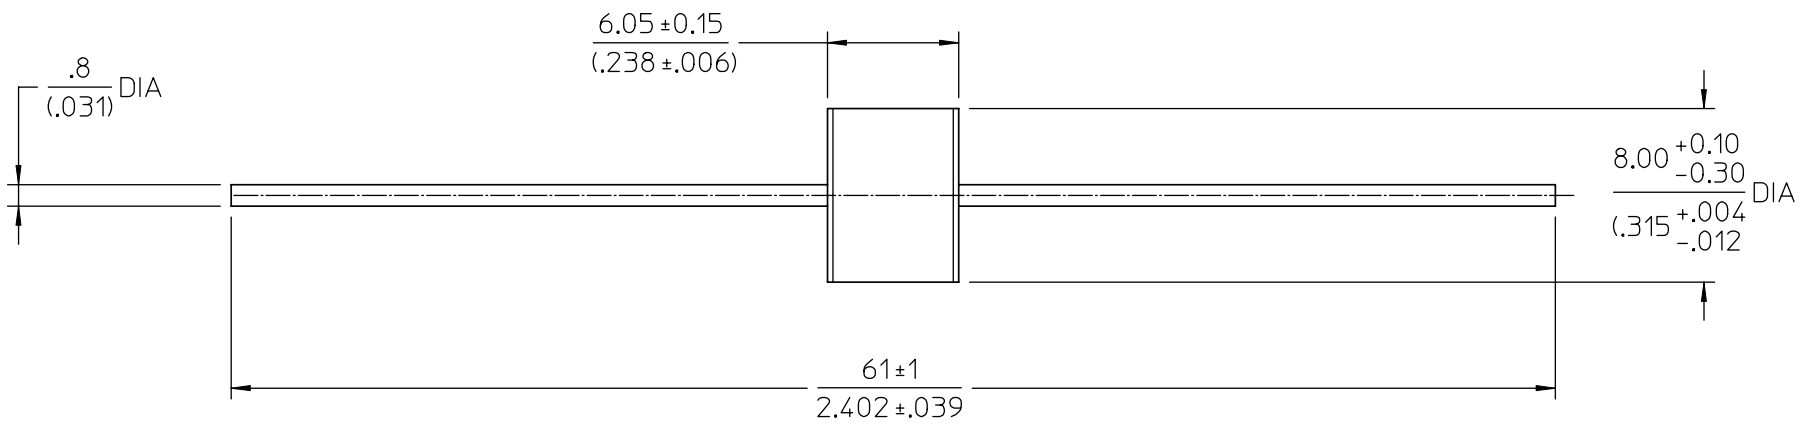


**VICOR CONFIDENTIAL**

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
#1	DRAWN FOR DEVELOPMENT	GCK 1/22/03	CF





**SPECIFICATIONS:**

PARAMETERS	LIMITS
DC SPARK-OVER VOLTAGE (100 V/s)	75V ±20%
IMPULSE SPARK-OVER VOLTAGE AT 1kV/us FOR 99% OF VALUES MEASURED	< 700V
NOMINAL IMPULSE DISCHARGE CURRENT (WAVE 8/20 us; 10 times)	5kA
NOMINAL ALTERNATING DISCHARGE CURRENT (50 Hz: 1s :5 times)	5A
INSULATION RESISTANCE AT 100VDC	> 1 GΩ
CAPACITANCE (at 1 MHz)	< 5pF
HOLDOVER VOLTAGE (R = 330 in series RC = 150 / 100nF in //)	60V

**NOTES:**

- PART IS SCREENED AS 220V AND MARKED AS 230V.
- TESTED BY AQL, 0.65 LEVEL II PER DIN 40080.
- ARRESTER IN IONIZED MODE.
- DIMENSIONS ARE IN MM (INCHES)

DRAWN BY <i>G.C. KEAY</i>		DATE 1/22/03		 <b>GAS DISCHARGE TUBE</b> 75 V +/- 20 %	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES- TOLERANCES ARE: FRACTIONS DECIMALS ANGLES * .XX = ±.25(.01) ±1° .XXX = ±.127(.005)					
THIRD ANGLE PROJECTION 		SIZE <b>B</b>	FSCM NO. <b>67131</b>	DWG NO. <b>26107</b>	REV <b># 1</b>
DO NOT SCALE DRAWING		SCALE 4:1	SHEET 1 OF 1		