

### Switchmode Full Plastic Dual Fast Recovery Power Rectifiers

Designed for use in switching power supplies, inverters and as free wheeling diodes. These state-of-the-art devices have the following features:

- \* Glass Passivated chip junctions
- \* Low Reverse Leakage Current
- \* Fast Switching for High Efficiency
- \* 150 Operating Junction Temperature
- \* Low Forward Voltage , High Current Capability
- \* Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O

Plating pb free is indicated by box

**FAST RECOVERY  
RECTIFIERS**


**6 AMPERES  
30-600 VOLTS**



ITO-220AB

### MAXIMUM RATINGS


| Characteristic   | Symbol                          | FRF06       |     |     |     | Unit |
|--|---------------------------------|-------------|-----|-----|-----|------|
|  |                                 | 30          | 40  | 50  | 60  |      |
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                       | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 300         | 400 | 500 | 600 | V    |
| RMS Reverse Voltage  | $V_{R(RMS)}$                    | 210         | 280 | 350 | 420 | V    |
| Average Rectifier Forward Current<br>Per Leg<br>Per Total Device   | $I_{F(AV)}$                     | 3.0<br>6.0  |     |     |     | A    |
| Peak Repetitive Forward Current<br>(Rate $V_R$ , Square Wave, 20kHz, $T_C=125$ )                             | $I_{FM}$                        | 6.0         |     |     |     | A    |
| Non-Repetitive Peak Surge Current<br>(Surge applied at rate load conditions<br>halfwave, single phase, 60Hz) | $I_{FSM}$                       | 75          |     |     |     | A    |
| Operating and Storage Junction<br>Temperature Range  | $T_J, T_{stg}$                  | -65 to +150 |     |     |     |      |



| DIM | MILLIMETERS |       |
|-----|-------------|-------|
|     | MIN         | MAX   |
| A   | 15.05       | 15.15 |
| B   | 13.35       | 13.45 |
| C   | 10.00       | 10.10 |
| D   | 6.55        | 6.65  |
| E   | 2.65        | 2.75  |
| F   | 1.55        | 1.65  |
| G   | 1.15        | 1.25  |
| H   | 0.55        | 0.65  |
| I   | 2.50        | 2.60  |
| J   | 3.00        | 3.20  |
| K   | 1.10        | 1.20  |
| L   | 0.55        | 0.65  |
| M   | 4.40        | 4.60  |
| N   | 1.15        | 1.25  |
| P   | 2.65        | 2.75  |
| Q   | 3.35        | 3.45  |

### ELECTRIAL CHARACTERISTICS

| Characteristic   | Symbol   | FRF06      |    |    |    | Unit    |
|--|----------|------------|----|----|----|---------|
|  |          | 30         | 40 | 50 | 60 |         |
| Maximum Instantaneous Forward Voltage<br>( $I_F=3.0$ Amp $T_C=25$ )  | $V_F$    | 1.3        |    |    |    | V       |
| Maximum Instantaneous Reverse Current<br>( Rated DC Voltage, $T_C=25$ )<br>( Rated DC Voltage, $T_C=125$ ) | $I_R$    | 5.0<br>100 |    |    |    | $\mu A$ |
| Reverse Recovery Time<br>( $I_F=0.5$ A, $I_R=1.0$ , $I_{rr}=0.25$ A )                                      | $T_{rr}$ | 250        |    |    |    | ns      |
| Typical Junction Capacitance<br>(Reverse Voltage of 4 volts & $f=1$ MHz)                                   | $C_P$    | 70         |    |    |    | pF      |



# FRF0630 Thru FRF0660

FIG-1 TYPICAL FORWARD CHARACTERISTICS

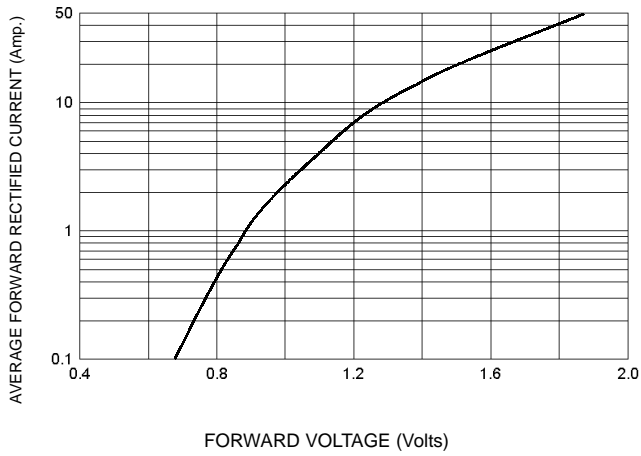


FIG-3 FORWARD CURRENT DERATING CURVE

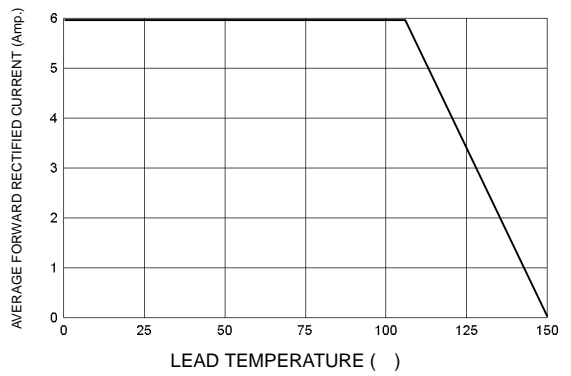


FIG-2 TYPICAL REVERSE CHARACTERISTICS

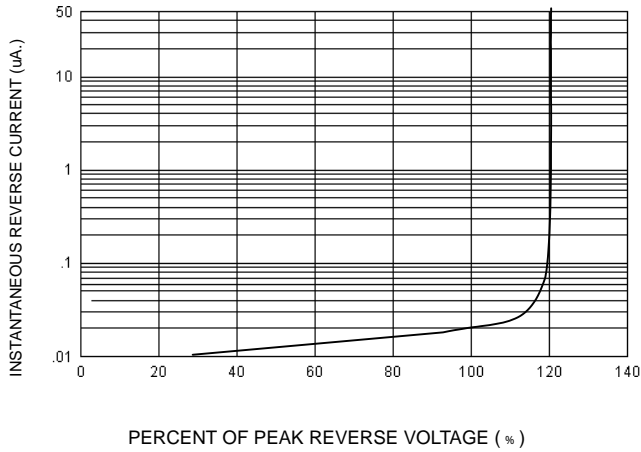


FIG-4 TYPICAL JUNCTION CAPACITANCE


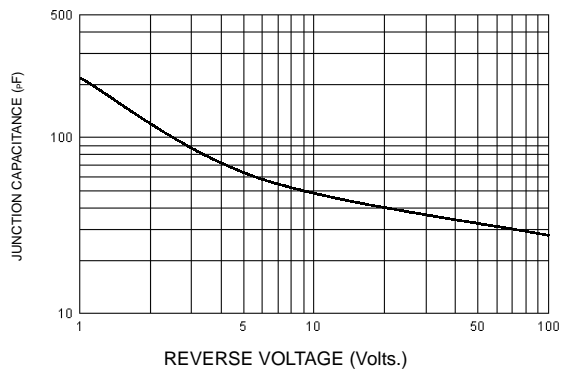


FIG-5 PEAK FORWARD SURGE CURRENT



- Notes:
1. Rise Time = 7 ns max. Input Impedance = 1 M Ω, 22 pF
  2. Rise Time = 10 ns max. Input Impedance = 50 Ω

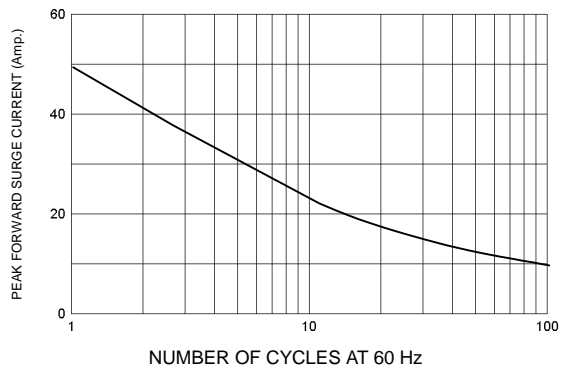

Set time base for 20/50 ns/cm

FIG-6 Reverse Recovery Time Characteristic and Test Circuit Diagram