

2012 Size

925/960 MHz  
Chip Multilayer Coupler


FSLC-S090S-P

All the technical data and information contained herein are subject to change without notice.




LC-FSLC-S090S-P-0406A

## Equivalent Circuits

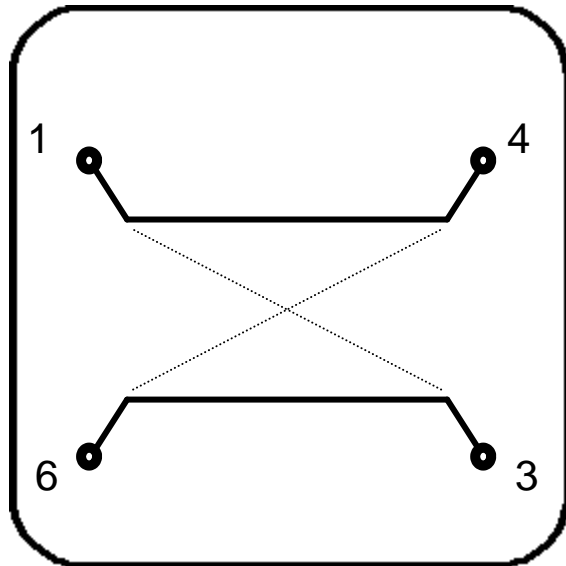

## Shape & Size

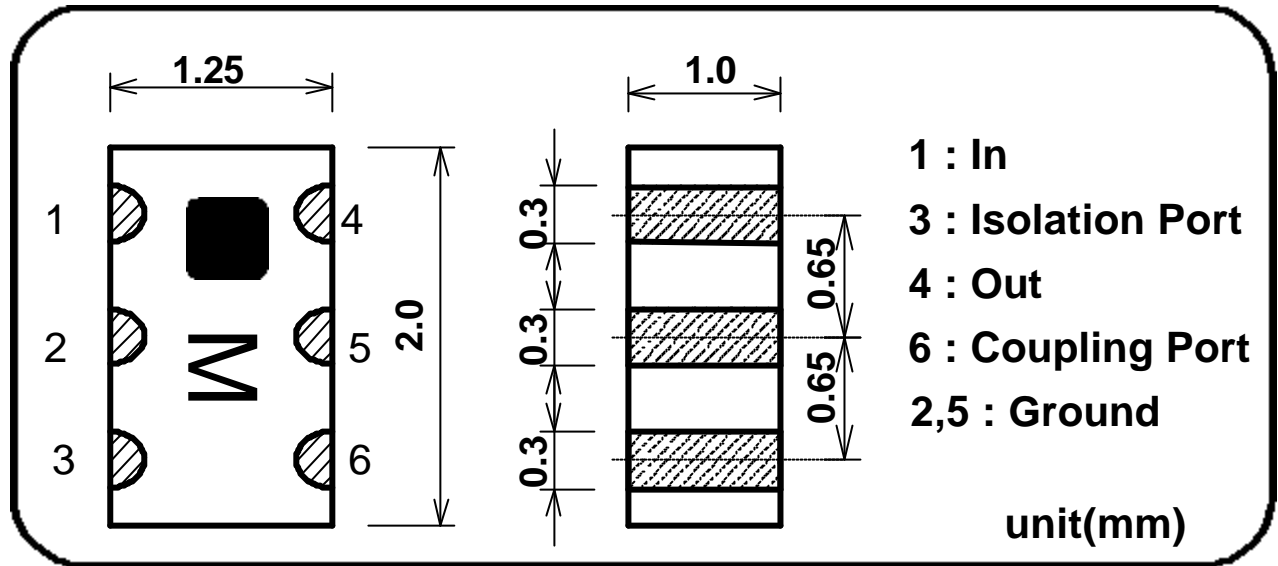

## Specifications


Part Name: FSLC-S090S-P

Frequency Range	Coupling	Insertion Loss	Isolation	Return Loss	Handling Power	Temperature Range
925-960MHz	14.3 +/- 1dB	0.5dB Max. (0.25dB Typ.)	24dB Typ.	17dB Min. (22dB Typ.)	1W Max. (CW)	-35 to +85 deg.C

All the technical data and information contained herein are subject to change without notice.

LC-FSLC-S090S-P-0406A





# FOOT PATTERN

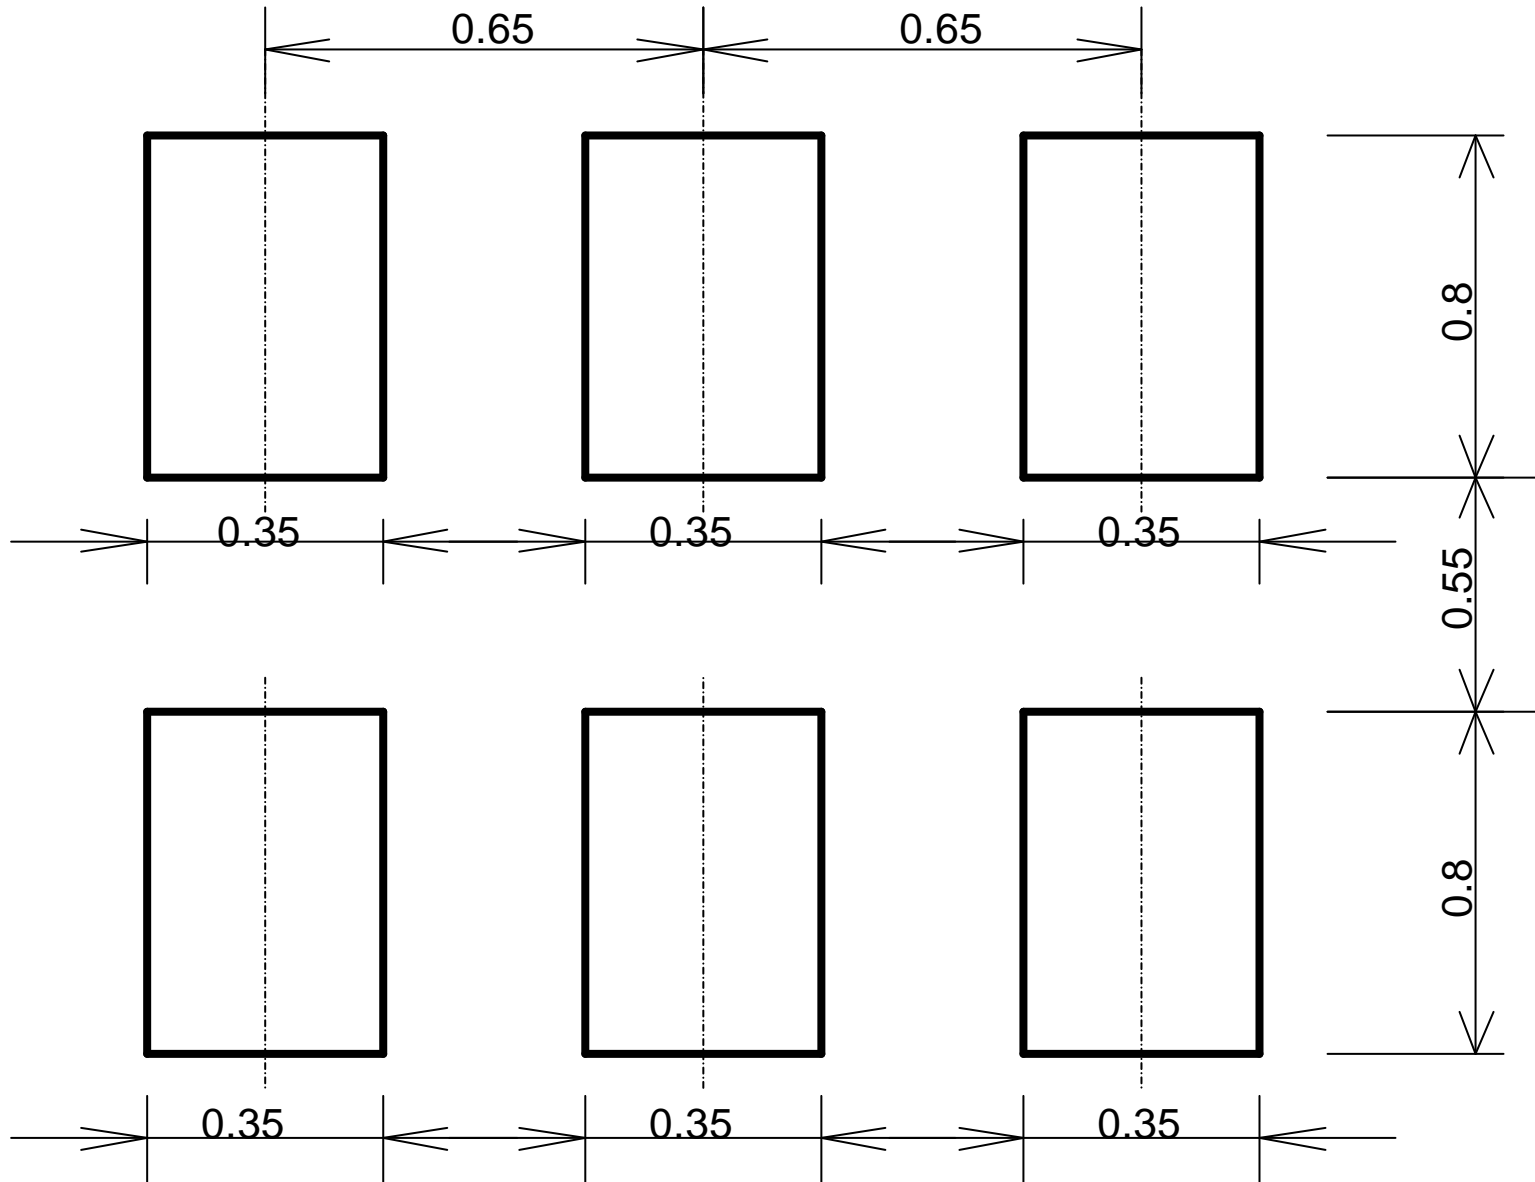


All the technical data and information contained herein are subject to change without notice.

**LC-FSLC-S090S-P-0406A**

# FSLC-S090S-P Sample Data

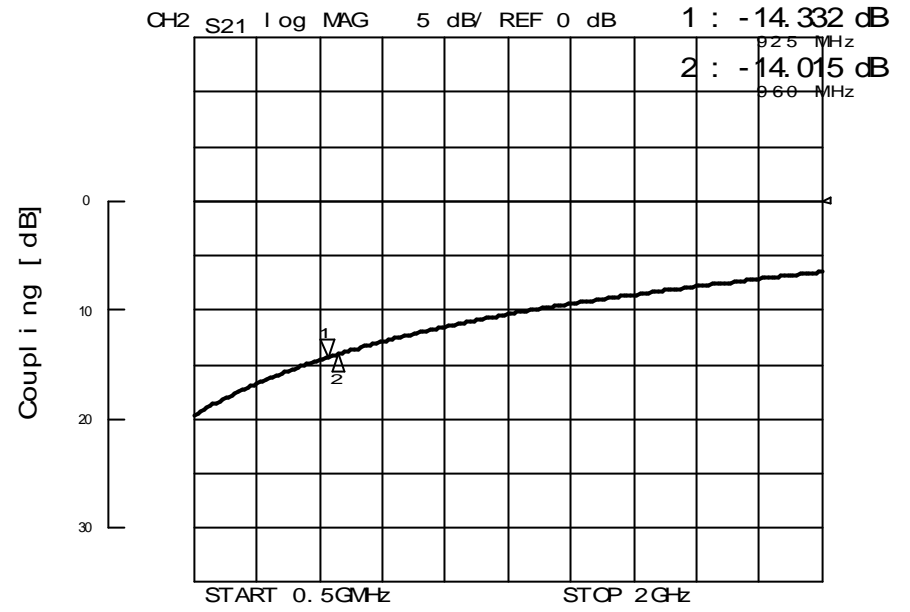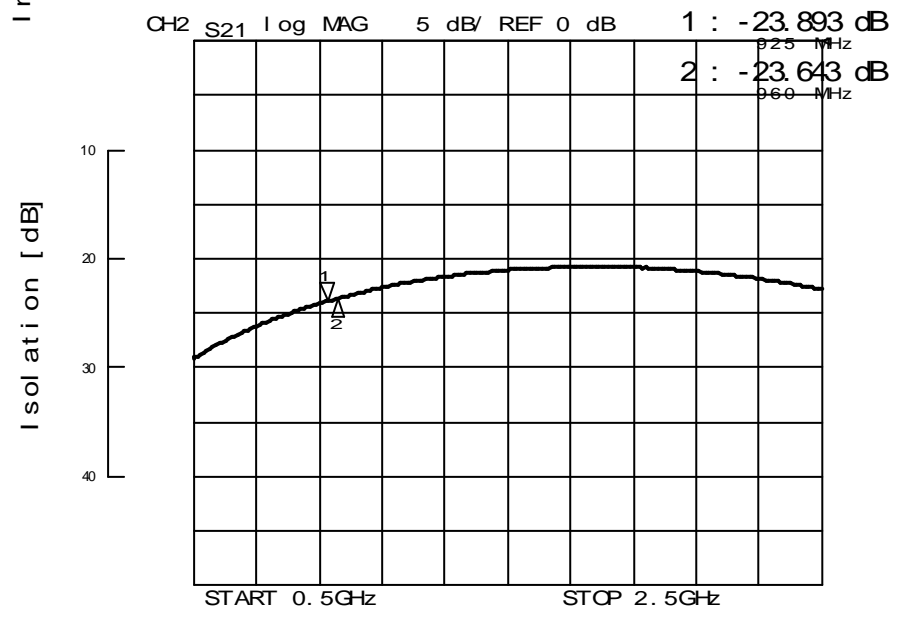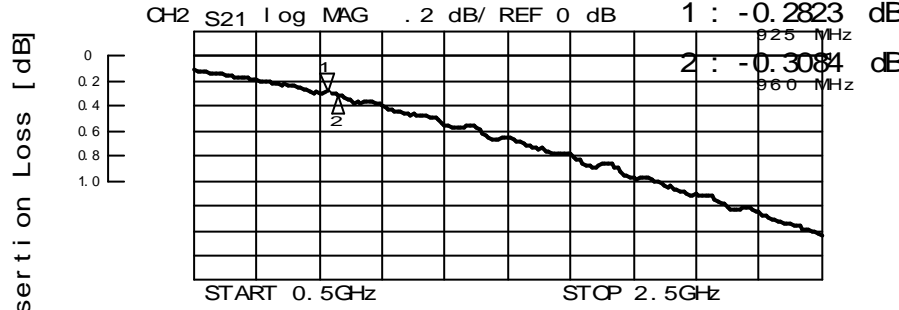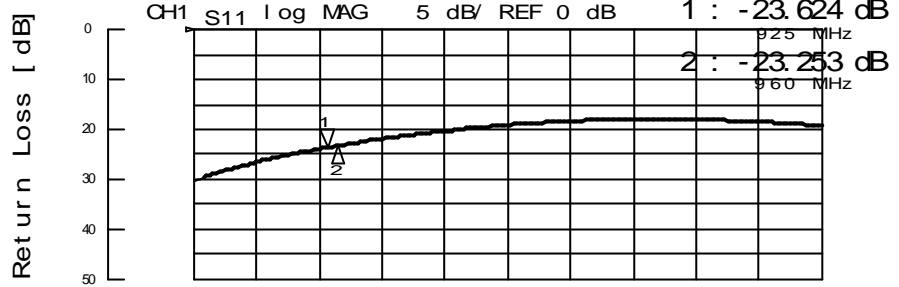

925/960 MHz  
Chip Multilayer Coupler "FSLC-S090S-P"

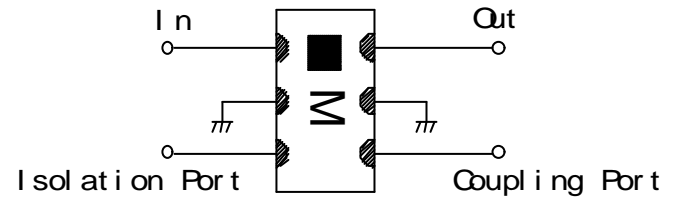

**LC-FSLC-S090S-P-0406A**