

High Voltage, Internally Compensated Operational Amplifier

The MC1436, C was designed for use as a summing amplifier, integrator, or amplifier with operating characteristics as a function of the external feedback components.

- Maximum Supply Voltage: ± 40 Vdc (MC1536)
- Output Voltage Swing:
 ± 30 Vpk(min) ($V_{CC} = +36$ V, $V_{EE} = -36$ V) (MC1536)
 ± 22 Vpk(min) ($V_{CC} = +28$ V, $V_{EE} = -28$ V)
- Input Bias Current: 20 nA max (MC1536)
- Input Offset Current: 3.0 nA max (MC1536)
- Fast Slew Rate: 2.0 V/ μ s typ
- Internally Compensated
- Offset Voltage Null Capability
- Input Overvoltage Protection
- A_{VOL} : 500,000 typ
- Characteristics Independent of Power Supply Voltages:
(± 5.0 Vdc to ± 36 Vdc)

Figure 1. Differential Amplifier with ± 20 V Common Mode Input Voltage Range


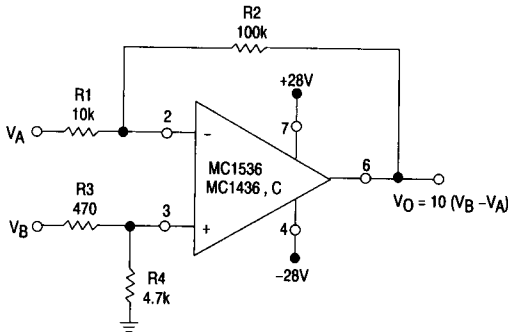


Figure 2. Typical Noninverting X10 Voltage Amplifier

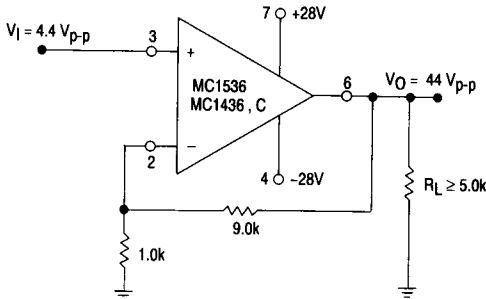

**MC1436, C
MC1536**

2

OPERATIONAL AMPLIFIER

**SILICON MONOLITHIC
INTEGRATED CIRCUIT**



**P1 SUFFIX
PLASTIC PACKAGE
CASE 626**




**U SUFFIX
CERAMIC PACKAGE
CASE 693**



**D SUFFIX
PLASTIC PACKAGE
CASE 751
(SO-8)**

PIN CONNECTIONS



ORDERING INFORMATION

Device	Temperature Range	Package
MC1436CD, D	0° to +70°C	SO-8
MC1436P1, CP1		Plastic DIP
MC1436CU, U	-55° to +125°C	Ceramic DIP
MC1536U		Ceramic DIP

MC1436,C, MC1536

MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$, unless otherwise noted.)

Rating	Symbol	MC1536	MC1436	MC1436C	Unit
Power Supply Voltage	V_{CC} V_{EE}	+40 -40	+34 -34	+30 -30	Vdc
Input Differential Voltage Range	V_{IDR}	Note 3			V
Input Common Mode Voltage Range	V_{ICR}	Note 3			V
Output Short Circuit Duration ($V_{CC} = V_{EE} = 28$ Vdc, $V_O = 0$)	tSC	5.0			sec
Power Dissipation (Package Limitation) Derate above $T_A = +25^\circ\text{C}$	P_D	680 4.6			mW mW/ $^\circ\text{C}$
Operating Ambient Temperature Range	T_A	-55 to +125	0 to +70		$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-65 to +150			$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($V_{CC} = +28$ V, $V_{EE} = -28$ V, $T_A = 25^\circ\text{C}$, unless otherwise noted.)

Characteristics	Symbol	MC1536		MC1436			MC1436C			Unit	
		Min	Typ	Max	Min	Typ	Max	Min	Typ		Max
Input Bias Current $T_A = +25^\circ\text{C}$ $T_A = T_{low}$ to T_{high} (See Note 1)	I_B	—	8.0	20	—	15	40	—	25	90	nAdc
Input Offset Current $T_A = +25^\circ\text{C}$ $T_A = +25^\circ\text{C}$ to T_{high} $T_A = T_{low}$ to $+25^\circ\text{C}$	I_{IO}	—	1.0	3.0	—	5.0	10	—	10	25	nAdc
Input Offset Voltage $T_A = +25^\circ\text{C}$ $T_A = T_{low}$ to T_{high}	V_{IO}	—	2.0	5.0	—	5.0	10	—	5.0	12	mVdc
Differential Input Impedance (Open-loop, $f \leq 5.0$ Hz)	r_D	—	10	—	—	10	—	—	10	—	M Ω
Parallel Input Resistance	C_p	—	2.0	—	—	2.0	—	—	2.0	—	pF
Common Mode Input Impedance ($f \leq 5.0$ Hz)	Z_{ic}	—	250	—	—	250	—	—	250	—	M Ω
Input Common Mode Voltage Range	V_{ICR}	± 24	± 25	—	± 22	± 25	—	± 18	± 20	—	Vpk
Equivalent Input Noise Voltage ($A_V = 100$, $R_G = 10$ k Ω , $f = 1.0$ kHz, BW = 1.0 Hz)	e_n	—	50	—	—	50	—	—	50	—	nV/(Hz) $^{1/2}$
Common Mode Rejection (dc)	CMR	80	110	—	70	110	—	50	90	—	dB
Large Signal DC Open-Loop Voltage Gain ($V_O = \pm 10$ V, $R_L = 100$ k Ω) $\left\{ \begin{array}{l} T_A = +25^\circ\text{C} \\ T_A = T_{low} \text{ to } T_{high} \end{array} \right.$ ($V_O = \pm 10$ V, $R_L = 10$ k Ω , $T_A = +25^\circ\text{C}$)	A_{VOL}	100,000 50,000	500,000 —	— —	70,000 50,000	500,000 —	— —	50,000 —	500,000 —	— —	V/V
Power Bandwidth (Voltage Follower) ($A_V = 1$, $R_L = 5.0$ k Ω , THD $\leq 5\%$, $V_O = 40$ V $_{p-p}$)	BWp	—	23	—	—	23	—	—	23	—	kHz
Unity Gain Crossover Frequency (Open-loop)	f_c	—	1.0	—	—	1.0	—	—	1.0	—	MHz
Phase Margin (Open-loop, Unity Gain)	ϕ_m	—	50	—	—	50	—	—	50	—	Degrees
Gain Margin	A_M	—	18	—	—	18	—	—	18	—	dB
Slew Rate (Unity Gain)	SR	—	2.0	—	—	2.0	—	—	2.0	—	V/ μs
Output Impedance ($f \leq 5.0$ Hz)	Z_O	—	1.0	—	—	1.0	—	—	1.0	—	k Ω
Short Circuit Output Current	I_{SC}	—	± 17	—	—	± 17	—	—	± 19	—	mA
Output Voltage Range ($R_L = 5.0$ k Ω) $V_{CC} = +28$ Vdc, $V_{EE} = -28$ Vdc $V_{CC} = +36$ Vdc, $V_{EE} = -36$ Vdc	V_O	± 22 ± 30	± 23 ± 32	—	± 20	± 22	—	± 20	-22	—	Vpk
Power Supply Rejection $V_{EE} = \text{Constant}$, $R_S \leq 10$ k Ω $V_{CC} = \text{Constant}$, $R_S \leq 10$ k Ω	PSR + PSR -	—	15 15	100 100	—	35 35	200 200	—	50 50	—	$\mu\text{V/V}$
Power Supply Current (See Note 2)	I_{CC} I_{EE}	—	2.2 2.2	4.0 4.0	—	2.6 2.6	5.0 5.0	—	2.6 2.6	5.0 5.0	mA
DC Quiescent Power Consumption ($V_O = 0$)	P_C	—	124	224	—	146	280	—	146	280	mW

- NOTES:**
- $T_{low} = 0^\circ\text{C}$ for MC1436,C $T_{high} = +70^\circ\text{C}$ for MC1436,C
-55 $^\circ\text{C}$ for MC1536 +125 $^\circ\text{C}$ for MC1536
 - $V_{CC} = V_{EE} = 5.0$ Vdc to 36 Vdc for MC1536
 $V_{CC} = V_{EE} = 5.0$ Vdc to 30 Vdc for MC1436
 $V_{CC} = V_{EE} = 5.0$ Vdc to 28 Vdc for MC1436C
 - Either or both input voltages must not exceed the magnitude of V_{CC} or $V_{EE} + 3.0$ V.

MC1436,C, MC1536

Figure 3. Low-Drift Sample and Hold

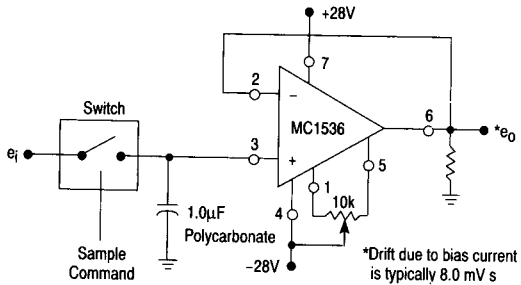


Figure 4. Power Bandwidth

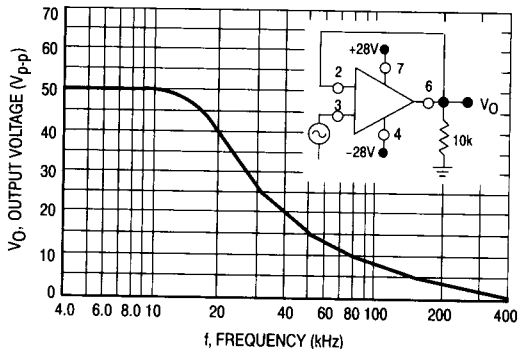


Figure 5. Peak Output Voltage Swing versus Power Supply Voltage

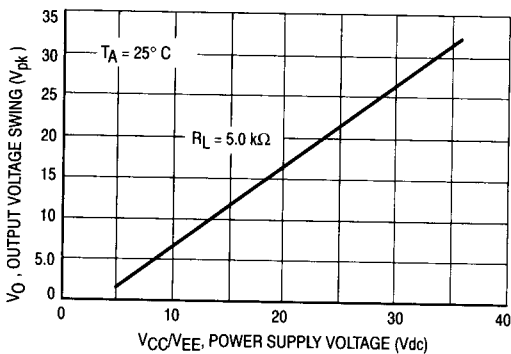


Figure 6. Open-Loop Frequency Response

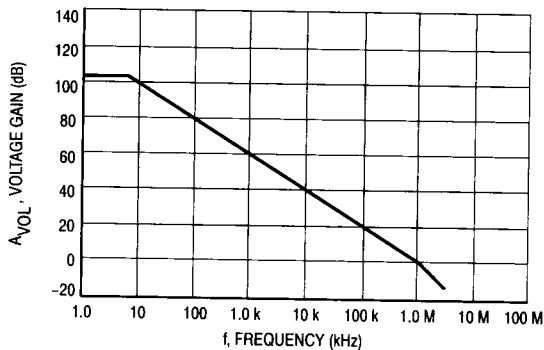


Figure 7. Output Short Circuit Current versus Temperature


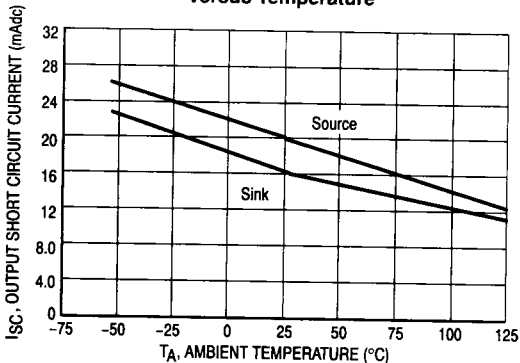


Figure 8. Input Bias Current versus Temperature

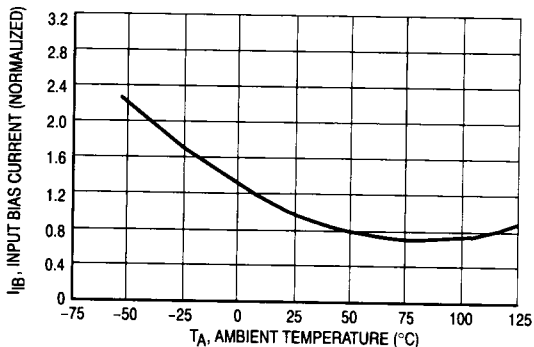

MC1436,C, MC1536

2

Figure 9. Inverting Feedback Model

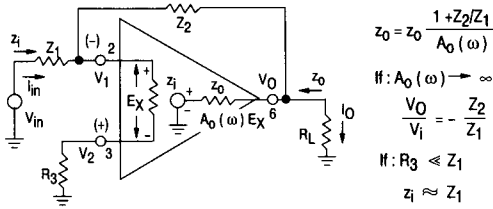


Figure 10. Noninverting Feedback Model

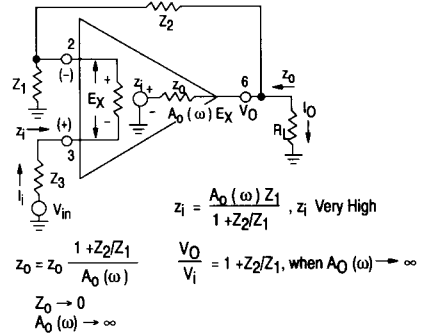


Figure 11. Audio Amplifier

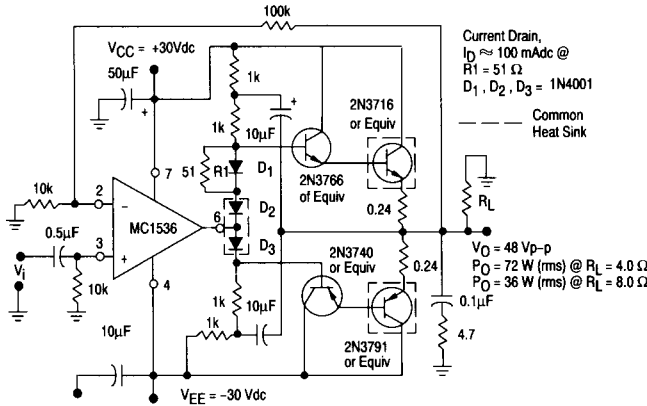


Figure 12. Voltage Controlled Current Source or Transconductance Amplifier with 0 V to 40 V Compliance

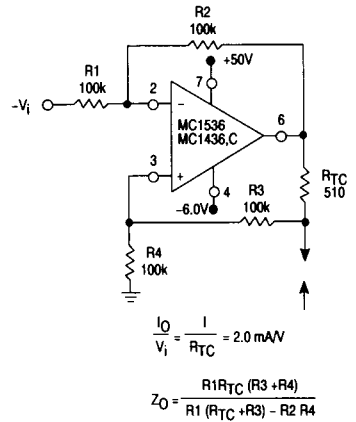


Figure 13. Representative Circuit Schematic

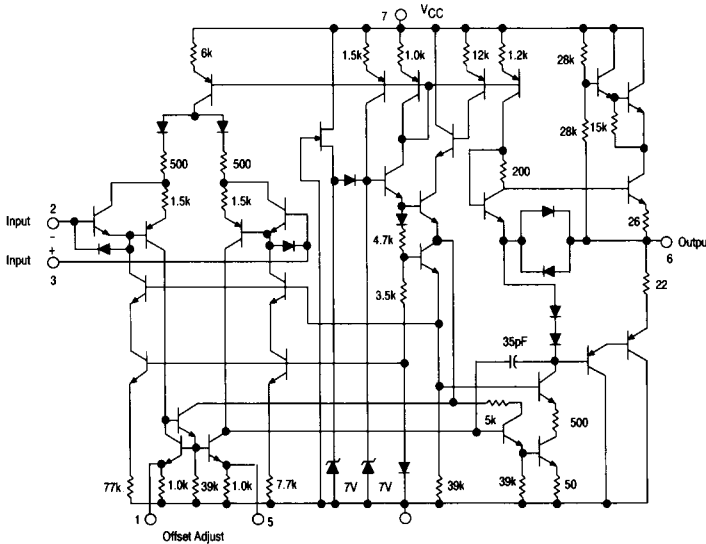


Figure 14. Equivalent Circuit

