

Bias Resistor Transistor

NPN Silicon Surface Mount Transistor with Monolithic Bias Resistor Network

This new series of digital transistors is designed to replace a single device and its external resistor bias network. The BRT (Bias Resistor Transistor) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space. The device is housed in the SOT-23 package which is designed for low power surface mount applications.

- Simplifies Circuit Design
- Reduces Board Space and Component Count
- The SOT-23 package can be soldered using wave or reflow. The modified gull-winged leads absorb thermal stress during soldering eliminating the possibility of damage to the die.
- Available in 8 mm embossed tape and reel. Use the Device Number to order the 7 inch/3000 unit reel. Replace “T1” with “T3” in the Device Number to order the 13 inch/10,000 unit reel.

MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)


| Rating | Symbol | Value | Unit |
|--|------------------|------------|-------------|
| Collector-Base Voltage | V _{CBO} | 50 | Vdc |
| Collector-Emitter Voltage | V _{CEO} | 50 | Vdc |
| Collector Current | I _C | 100 | mAdc |
| Total Power Dissipation @ T _A = 25°C (Note 1.) Derate above 25°C | P _D | 200 1.6 | mW mW/°C |

DEVICE MARKING AND RESISTOR VALUES


| Device | Marking | R1(K) | R2(K) |
|-------------|---------|-------|-------|
| MMUN2211LT1 | A8A | 10 | 10 |
| MMUN2212LT1 | A8B | 22 | 22 |
| MMUN2213LT1 | A8C | 47 | 47 |
| MMUN2214LT1 | A8D | 10 | 47 |
| MMUN2215LT1 | A8E | 10 | ∞ |
| MMUN2216LT1 | A8F | 4.7 | ∞ |
| MMUN2230LT1 | A8G | 1.0 | 1.0 |
| MMUN2231LT1 | A8H | 2.2 | 2.2 |
| MMUN2232LT1 | A8J | 4.7 | 4.7 |
| MMUN2233LT1 | A8K | 4.7 | 47 |
| MMUN2234LT1 | A8L | 22 | 47 |
| MMUN2235LT1 | A8M | 2.2 | 47 |
| MMUN2238LT1 | A8R | 2.2 | ∞ |
| MMUN2241LT1 | A8U | 100 | ∞ |

1. Device mounted on a FR-4 glass epoxy printed circuit board using the minimum recommended footprint.

MMUN2211LT1 SERIES

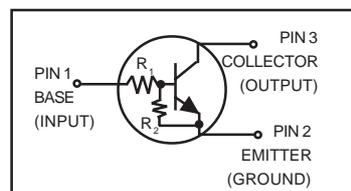

MARKING DIAGRAM



A6x = Device Marking
x = A - L (See Page 2)
M = Date Code

ORDERING INFORMATION

| Device | Package | Shipping |
|-------------|---------|------------------|
| MMUN2211LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2212LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2213LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2214LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2215LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2216LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2230LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2231LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2232LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2233LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2234LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2235LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2238LT1 | SOT-23 | 3000/Tape & Reel |
| MMUN2241LT1 | SOT-23 | 3000/Tape & Reel |

MMUN2211LT1 Series

THERMAL CHARACTERISTICS

| Rating | Symbol | Value | Unit |
|--|-----------------|-------------|-----------|
| Thermal Resistance – Junction-to-Ambient (surface mounted) | $R_{\theta JA}$ | 625 | °C/W |
| Operating and Storage Temperature Range | T_J, T_{stg} | -65 to +150 | °C |
| Maximum Temperature for Soldering Purposes, Time in Solder Bath | T_L | 260 10 | °C Sec |

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

OFF CHARACTERISTICS

| | | | | | |
|---|---------------|----|---|------|------|
| Collector-Base Cutoff Current ($V_{CB} = 50\text{ V}, I_E = 0$) | I_{CBO} | – | – | 100 | nAdc |
| Collector-Emitter Cutoff Current ($V_{CE} = 50\text{ V}, I_B = 0$) | I_{CEO} | – | – | 500 | nAdc |
| Emitter-Base Cutoff Current ($V_{EB} = 6.0\text{ V}, I_C = 0$) | I_{EBO} | – | – | 0.5 | mAdc |
| MMUN2211LT1 | | – | – | 0.2 | |
| MMUN2212LT1 | | – | – | 0.1 | |
| MMUN2213LT1 | | – | – | 0.2 | |
| MMUN2214LT1 | | – | – | 0.9 | |
| MMUN2215LT1 | | – | – | 1.9 | |
| MMUN2216LT1 | | – | – | 4.3 | |
| MMUN2230LT1 | | – | – | 2.3 | |
| MMUN2231LT1 | | – | – | 1.5 | |
| MMUN2232LT1 | | – | – | 0.18 | |
| MMUN2233LT1 | | – | – | 0.13 | |
| MMUN2234LT1 | | – | – | 0.2 | |
| MMUN2235LT1 | | – | – | 4.0 | |
| MMUN2238LT1 | | – | – | 0.1 | |
| MMUN2241LT1 | | – | – | | |
| Collector-Base Breakdown Voltage ($I_C = 10\ \mu\text{A}, I_E = 0$) | $V_{(BR)CBO}$ | 50 | – | – | Vdc |
| Collector-Emitter Breakdown Voltage (Note 2.), ($I_C = 2.0\text{ mA}, I_B = 0$) | $V_{(BR)CEO}$ | 50 | – | – | Vdc |

ON CHARACTERISTICS (Note 2.)

| | | | | | |
|---|---------------|-----|-----|------|-----|
| DC Current Gain ($V_{CE} = 10\text{ V}, I_C = 5.0\text{ mA}$) | h_{FE} | 35 | 60 | – | |
| MMUN2211LT1 | | 60 | 100 | – | |
| MMUN2212LT1 | | 80 | 140 | – | |
| MMUN2213LT1 | | 80 | 140 | – | |
| MMUN2214LT1 | | 160 | 350 | – | |
| MMUN2215LT1 | | 160 | 350 | – | |
| MMUN2216LT1 | | 3.0 | 5.0 | – | |
| MMUN2230LT1 | | 8.0 | 15 | – | |
| MMUN2231LT1 | | 15 | 30 | – | |
| MMUN2232LT1 | | 80 | 200 | – | |
| MMUN2233LT1 | | 80 | 150 | – | |
| MMUN2234LT1 | | 80 | 140 | – | |
| MMUN2235LT1 | | 160 | 350 | – | |
| MMUN2238LT1 | | 160 | 350 | – | |
| MMUN2241LT1 | | | | | |
| Collector-Emitter Saturation Voltage ($I_C = 10\text{ mA}, I_B = 0.3\text{ mA}$) ($I_C = 10\text{ mA}, I_B = 5\text{ mA}$) MMUN2230LT1/MMUN2231LT1 ($I_C = 10\text{ mA}, I_B = 1\text{ mA}$) MMUN2215LT1/MMUN2216LT1 MMUN2232LT1/MMUN2233LT1/MMUN2234LT1/ MMUN2235LT1/MMUN2238LT1 | $V_{CE(sat)}$ | – | – | 0.25 | Vdc |

2. Pulse Test: Pulse Width < 300 μs , Duty Cycle < 2.0%.

MMUN2211LT1 Series

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|-----------|-------|-------|-------|------------------|
| ON CHARACTERISTICS (Note 3.) | | | | | |
| Output Voltage (on) ($V_{CC} = 5.0\text{ V}$, $V_B = 2.5\text{ V}$, $R_L = 1.0\text{ k}\Omega$) | V_{OL} | – | – | 0.2 | Vdc |
| MMUN2211LT1 | | – | – | 0.2 | |
| MMUN2212LT1 | | – | – | 0.2 | |
| MMUN2214LT1 | | – | – | 0.2 | |
| MMUN2215LT1 | | – | – | 0.2 | |
| MMUN2216LT1 | | – | – | 0.2 | |
| MMUN2230LT1 | | – | – | 0.2 | |
| MMUN2231LT1 | | – | – | 0.2 | |
| MMUN2232LT1 | | – | – | 0.2 | |
| MMUN2233LT1 | | – | – | 0.2 | |
| MMUN2234LT1 | | – | – | 0.2 | |
| MMUN2235LT1 | | – | – | 0.2 | |
| MMUN2238LT1 | | – | – | 0.2 | |
| ($V_{CC} = 5.0\text{ V}$, $V_B = 3.5\text{ V}$, $R_L = 1.0\text{ k}\Omega$) | | – | – | 0.2 | |
| ($V_{CC} = 5.0\text{ V}$, $V_B = 5.0\text{ V}$, $R_L = 1.0\text{ k}\Omega$) | | – | – | 0.2 | |
| MMUN2213LT1 | | – | – | 0.2 | |
| MMUN2241LT1 | | – | – | 0.2 | |
| Output Voltage (off) ($V_{CC} = 5.0\text{ V}$, $V_B = 0.5\text{ V}$, $R_L = 1.0\text{ k}\Omega$) ($V_{CC} = 5.0\text{ V}$, $V_B = 0.050\text{ V}$, $R_L = 1.0\text{ k}\Omega$) ($V_{CC} = 5.0\text{ V}$, $V_B = 0.25\text{ V}$, $R_L = 1.0\text{ k}\Omega$) | V_{OH} | 4.9 | – | – | Vdc |
| MMUN2230LT1 | | | | | |
| MMUN2215LT1 | | | | | |
| MMUN2216LT1 | | | | | |
| MMUN2233LT1 | | | | | |
| MMUN2238LT1 | | | | | |
| Input Resistor | R_1 | 7.0 | 10 | 13 | $\text{k}\Omega$ |
| MMUN2211LT1 | | 15.4 | 22 | 28.6 | |
| MMUN2212LT1 | | 32.9 | 47 | 61.1 | |
| MMUN2213LT1 | | 7.0 | 10 | 13 | |
| MMUN2214LT1 | | 7.0 | 10 | 13 | |
| MMUN2215LT1 | | 3.3 | 4.7 | 6.1 | |
| MMUN2216LT1 | | 0.7 | 1.0 | 1.3 | |
| MMUN2230LT1 | | 1.5 | 2.2 | 2.9 | |
| MMUN2231LT1 | | 3.3 | 4.7 | 6.1 | |
| MMUN2232LT1 | | 3.3 | 4.7 | 6.1 | |
| MMUN2233LT1 | | 15.4 | 22 | 28.6 | |
| MMUN2234LT1 | | 1.54 | 2.2 | 2.86 | |
| MMUN2235LT1 | | 1.54 | 2.2 | 2.88 | |
| MMUN2238LT1 | | 70 | 100 | 130 | |
| MMUN2241LT1 | | | | | |
| Resistor Ratio | R_1/R_2 | 0.8 | 1.0 | 1.2 | |
| MMUN2211LT1/MMUN2212LT1/MMUN2213LT1 | | 0.17 | 0.21 | 0.25 | |
| MMUN2214LT1 | | – | – | – | |
| MMUN2215LT1/MMUN2216LT1/MMUN2238LT1 | | – | – | – | |
| MMUN2241LT1 | | – | – | – | |
| MMUN2230LT1/MMUN2231LT1/MMUN2232LT1 | | 0.8 | 1.0 | 1.2 | |
| MMUN2233LT1 | | 0.055 | 0.1 | 0.185 | |
| MMUN2234LT1 | | 0.38 | 0.47 | 0.56 | |
| MMUN2235LT1 | | 0.038 | 0.047 | 0.056 | |

3. Pulse Test: Pulse Width < 300 μs , Duty Cycle < 2.0%.

MMUN2211LT1 Series

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2211LT1

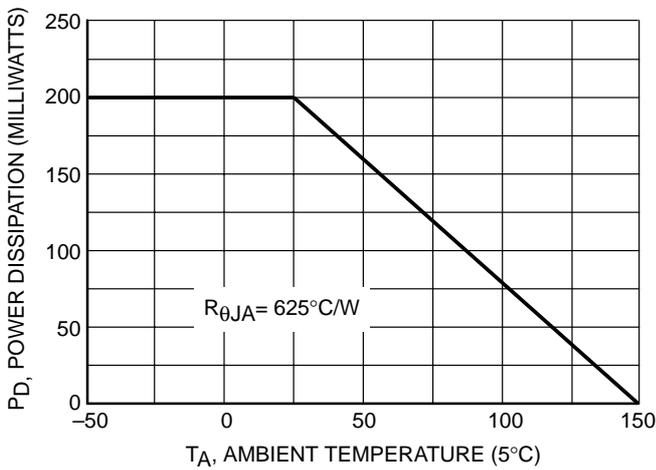


Figure 1. Derating Curve

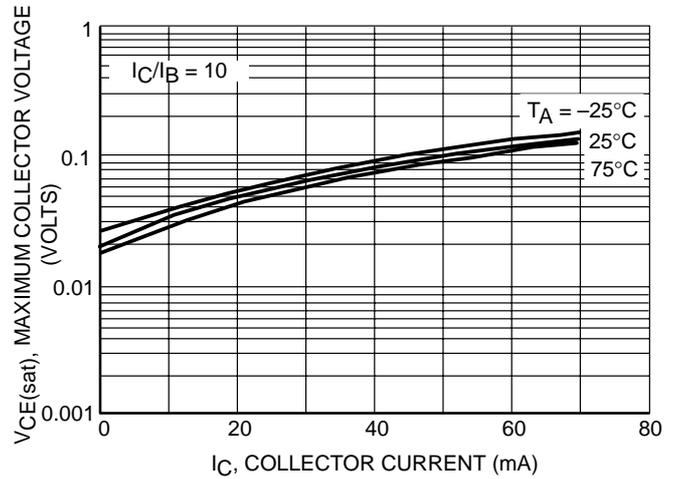


Figure 2. $V_{CE(sat)}$ vs. I_C

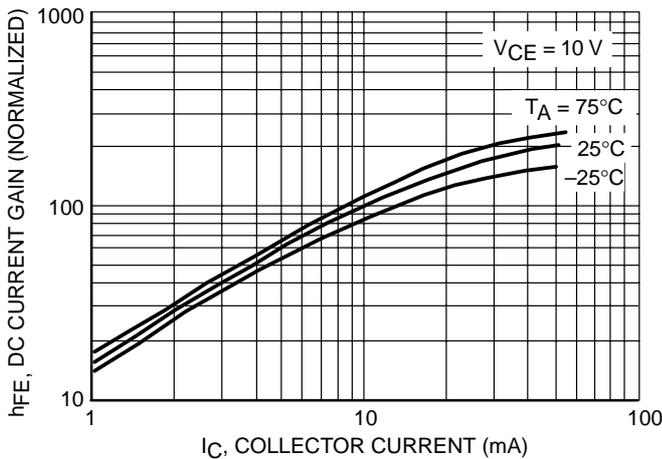


Figure 3. DC Current Gain

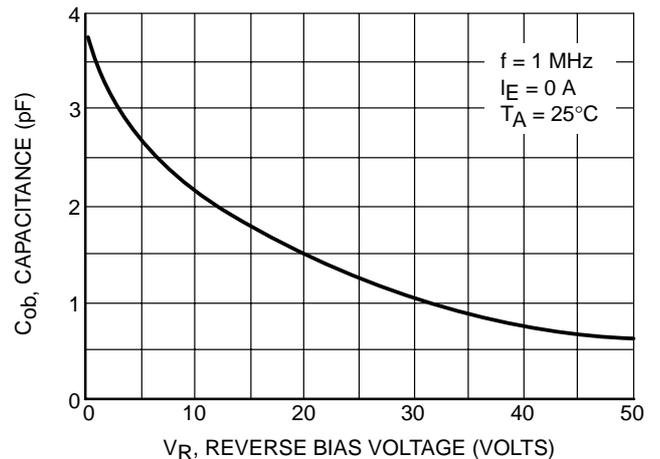


Figure 4. Output Capacitance

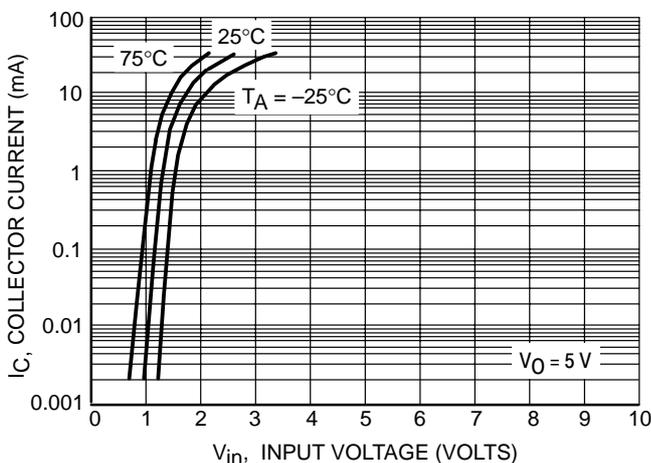


Figure 5. Output Current vs. Input Voltage

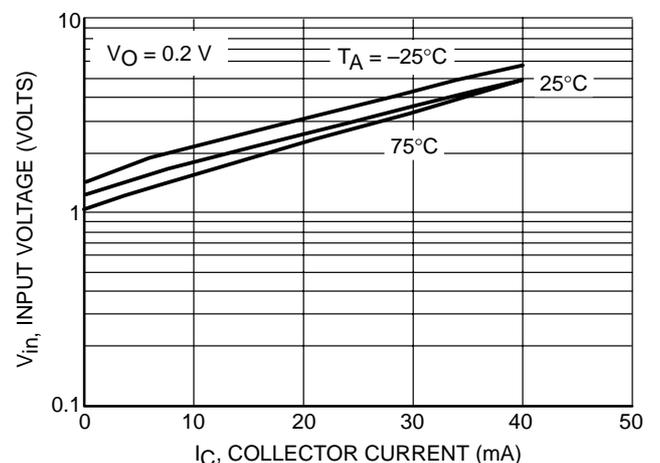


Figure 6. Input Voltage vs. Output Current

MMUN2211LT1 Series

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2212LT1

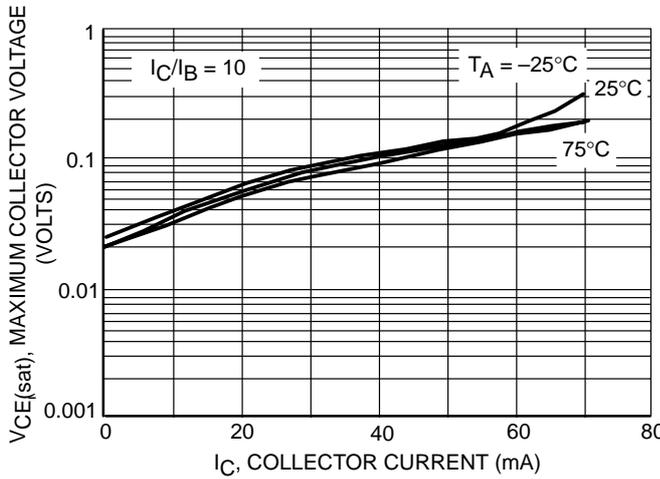


Figure 7. $V_{CE(sat)}$ vs. I_C

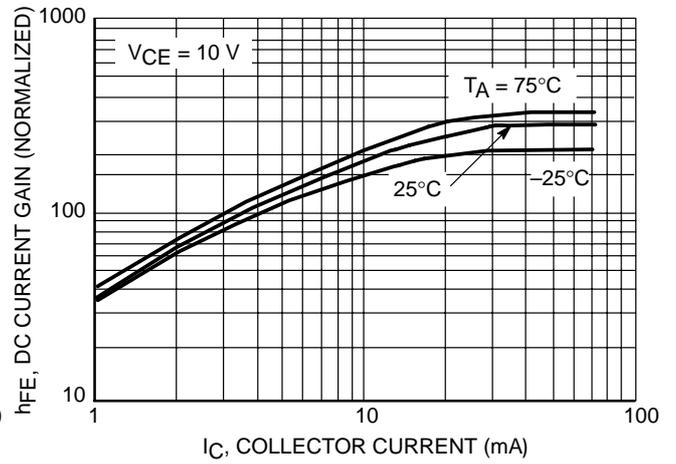


Figure 8. DC Current Gain

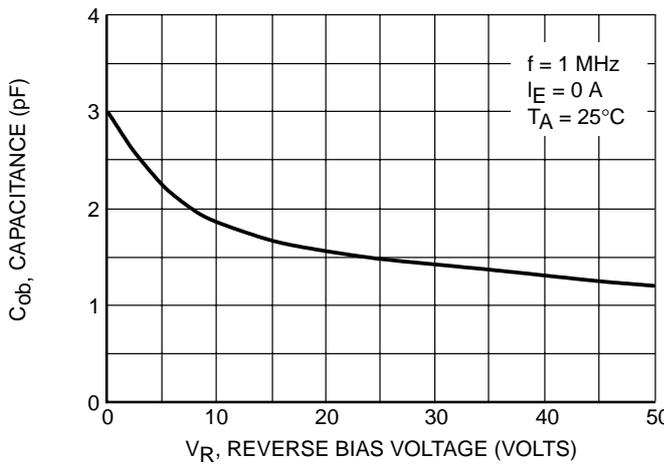


Figure 9. Output Capacitance

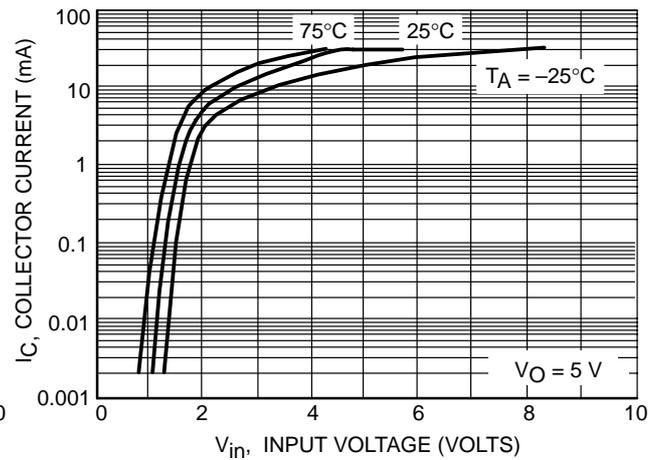


Figure 10. Output Current vs. Input Voltage

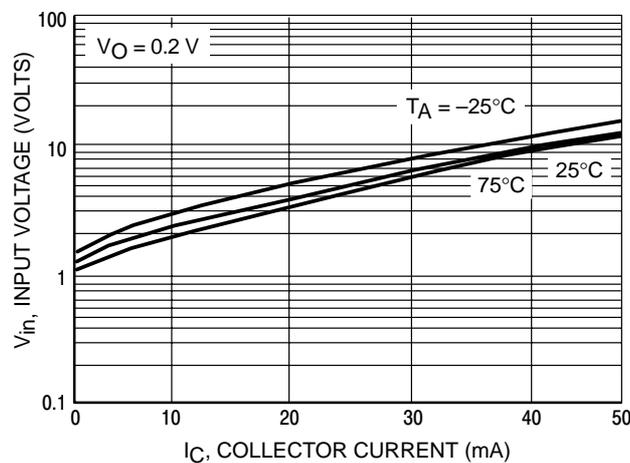


Figure 11. Input Voltage vs. Output Current

MMUN2211LT1 Series

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2213LT1

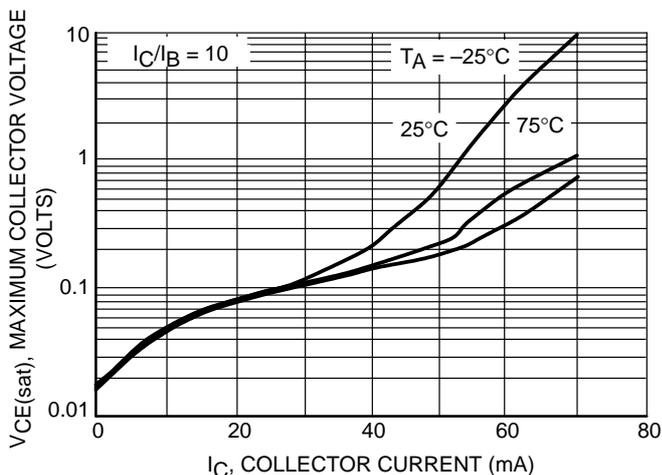


Figure 12. $V_{CE(sat)}$ vs. I_C

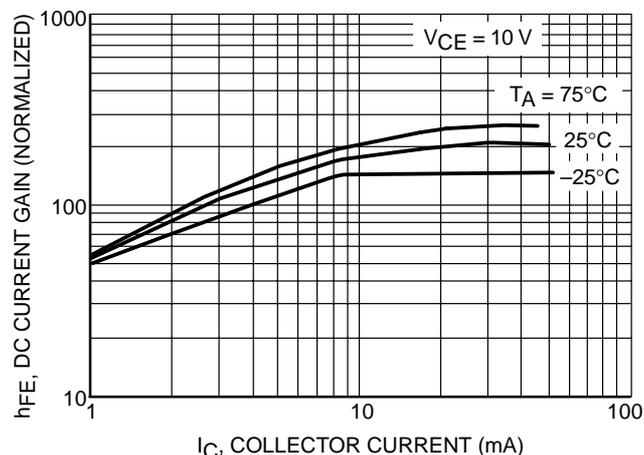


Figure 13. DC Current Gain

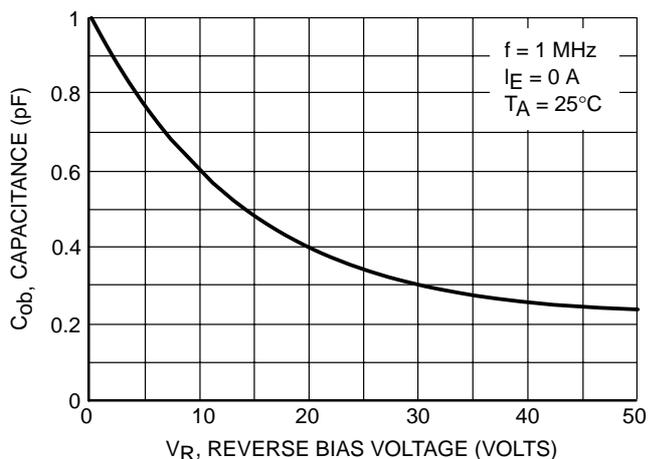


Figure 14. Output Capacitance

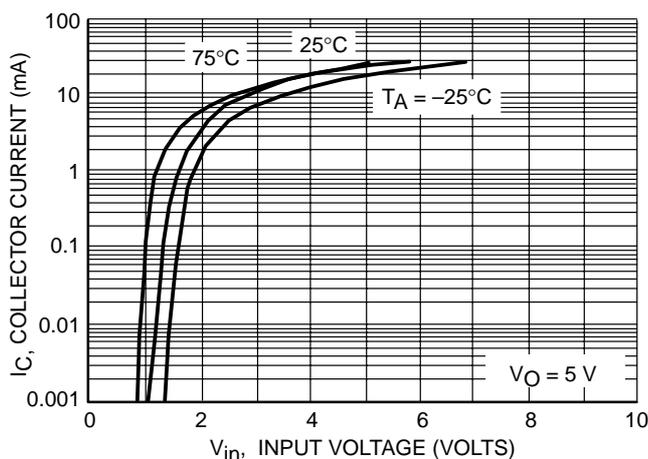


Figure 15. Output Current vs. Input Voltage

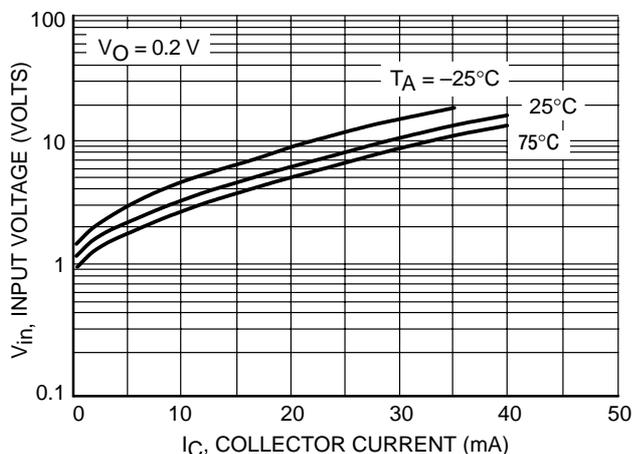


Figure 16. Input Voltage vs. Output Current

MMUN2211LT1 Series

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2214LT1

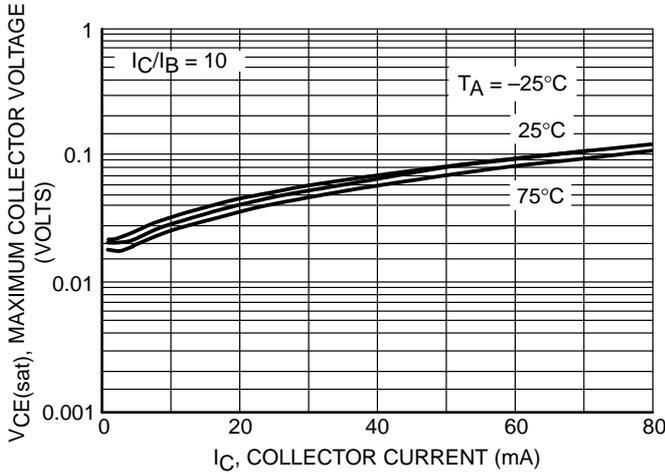


Figure 17. $V_{CE(sat)}$ vs. I_C

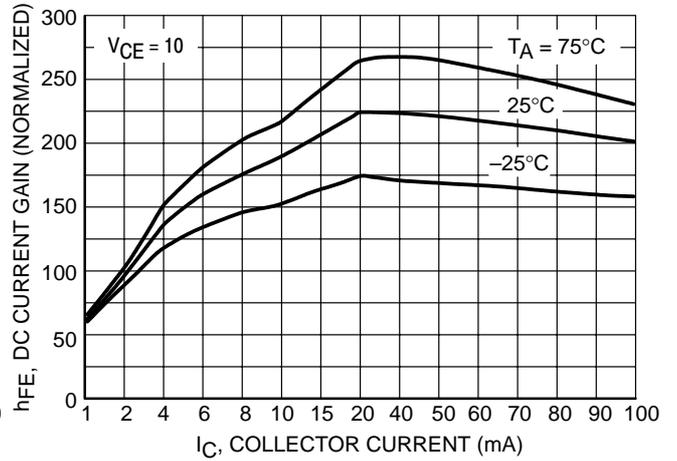


Figure 18. DC Current Gain

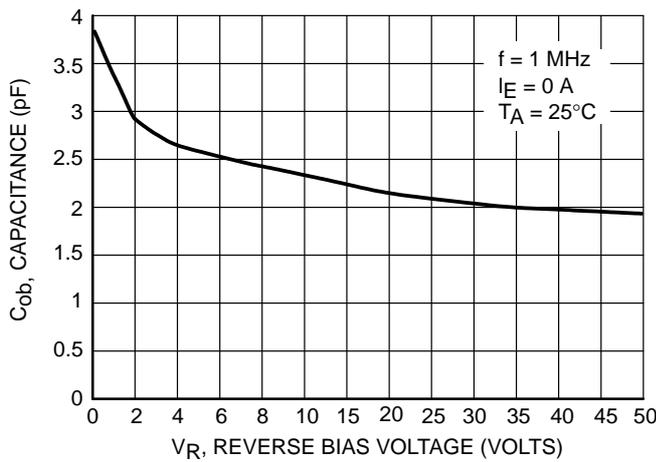


Figure 19. Output Capacitance

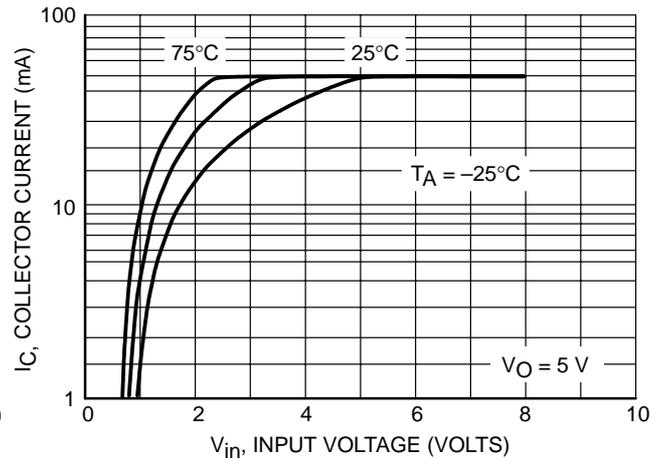


Figure 20. Output Current vs. Input Voltage

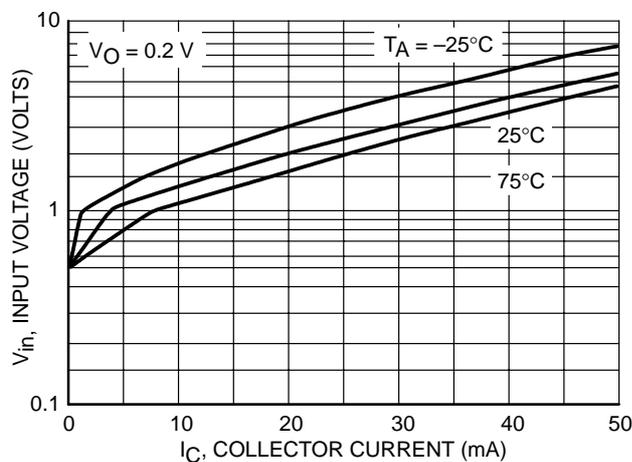


Figure 21. Input Voltage vs. Output Current

MMUN2211LT1 Series

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2232LT1

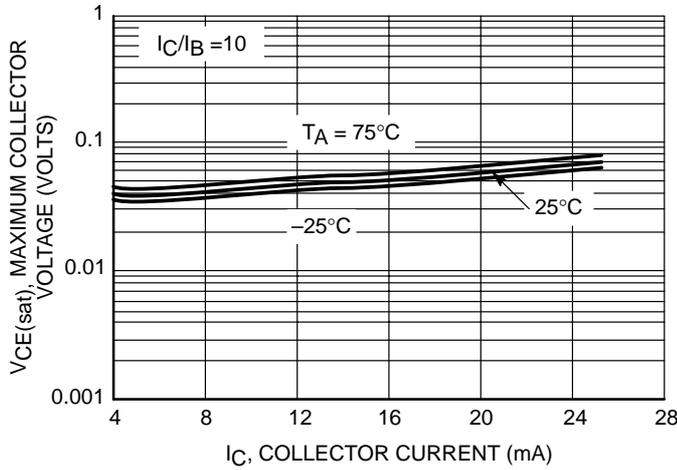


Figure 22. $V_{CE(sat)}$ vs. I_C

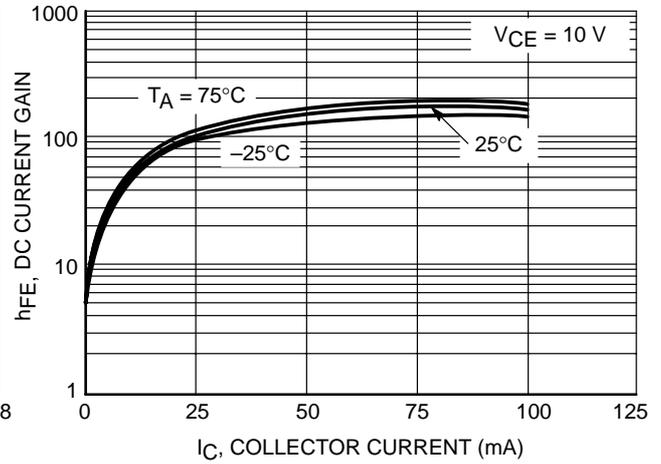


Figure 23. DC Current Gain

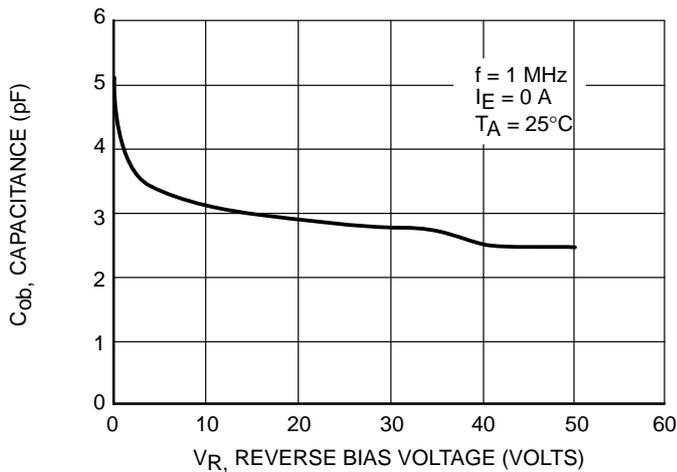


Figure 24. Output Capacitance

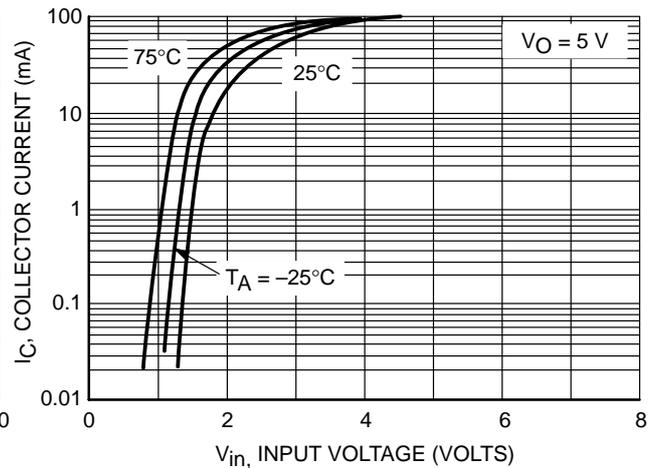


Figure 25. Output Current vs. Input Voltage

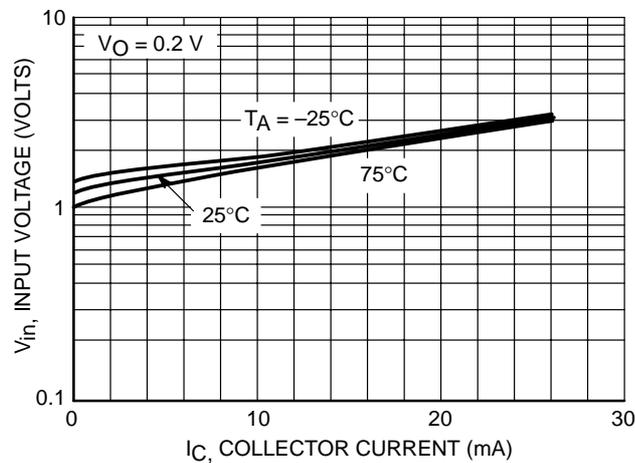


Figure 26. Output Voltage vs. Input Current

MMUN2211LT1 Series

TYPICAL ELECTRICAL CHARACTERISTICS
MMUN2233LT1

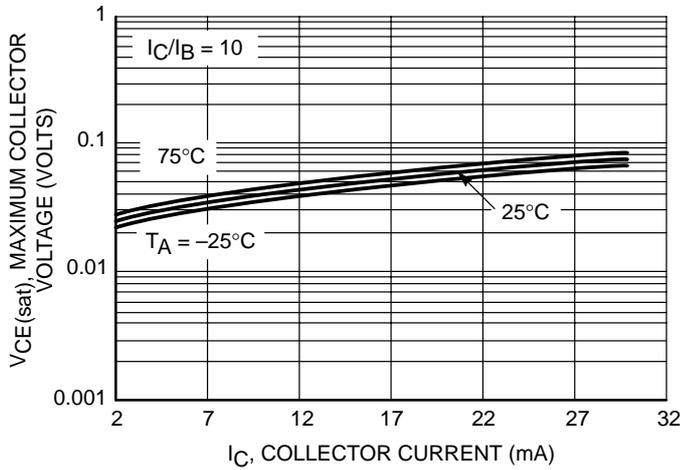


Figure 27. $V_{CE(sat)}$ vs. I_C

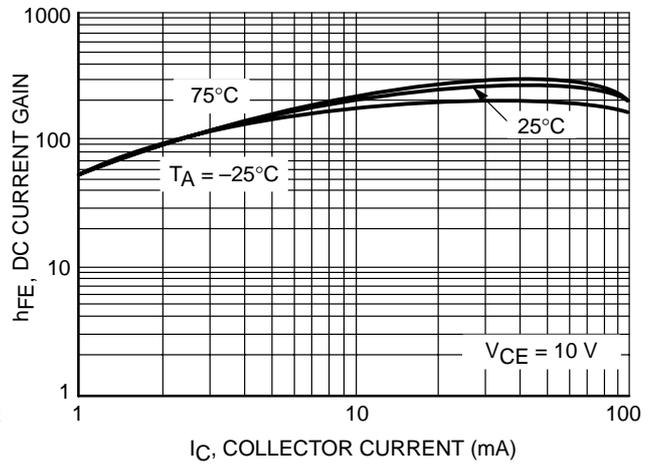


Figure 28. DC Current Gain

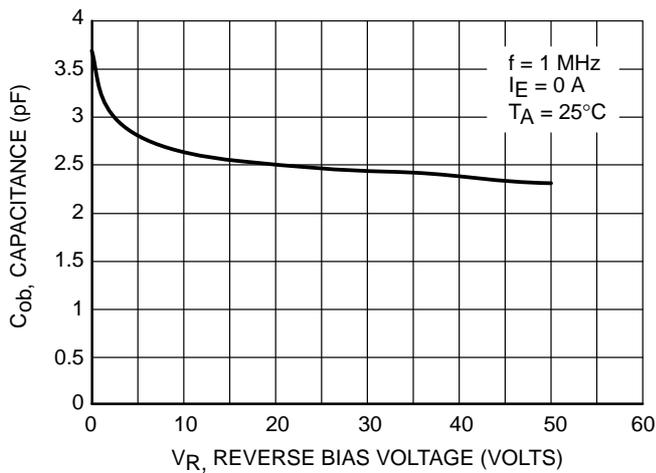


Figure 29. Output Capacitance

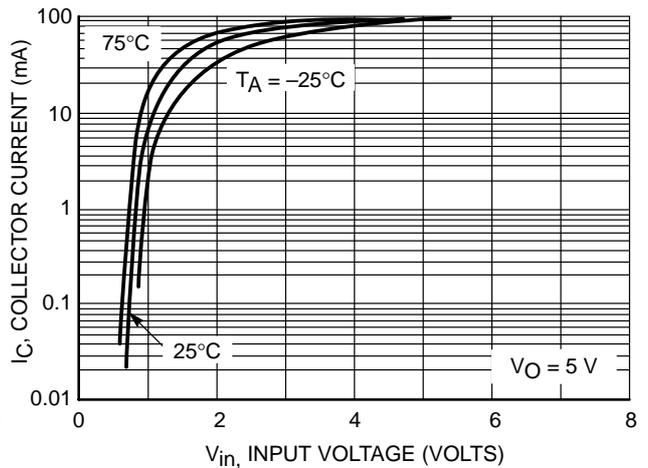


Figure 30. Output Current vs. Input Voltage

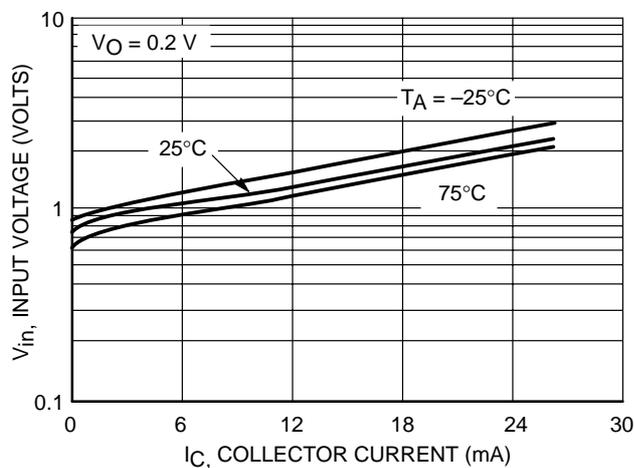


Figure 31. Input Voltage vs. Output Current

MMUN2211LT1 Series

TYPICAL APPLICATIONS FOR NPN BRTs

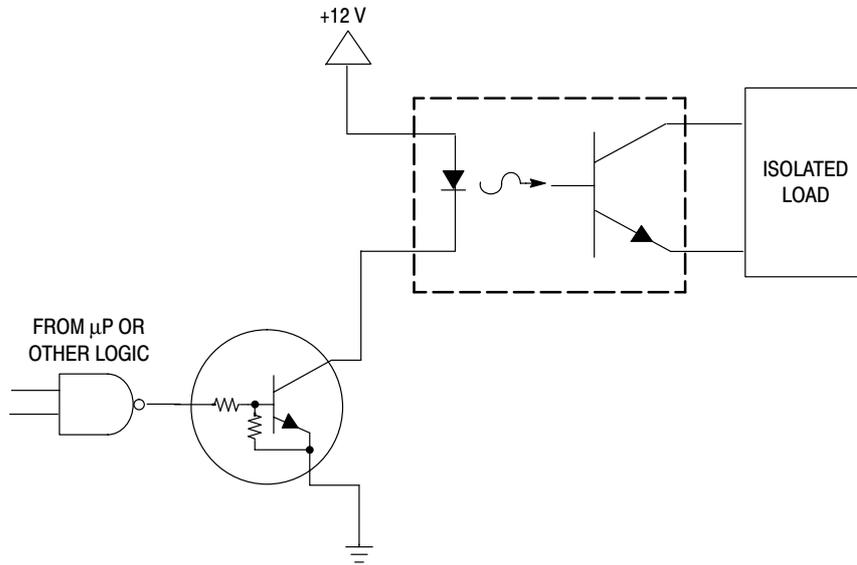


Figure 32. Level Shifter: Connects 12 or 24 Volt Circuits to Logic

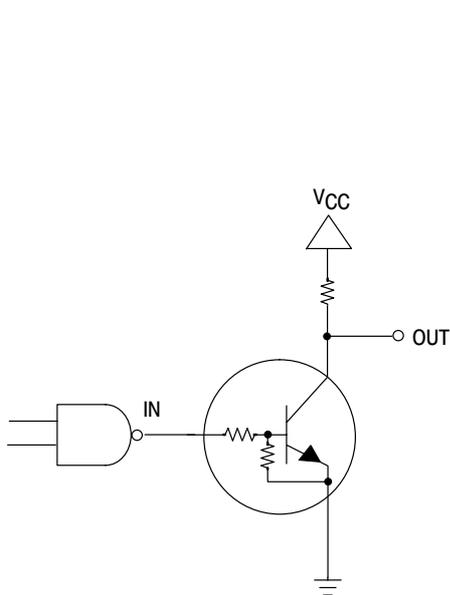


Figure 33. Open Collector Inverter: Inverts the Input Signal

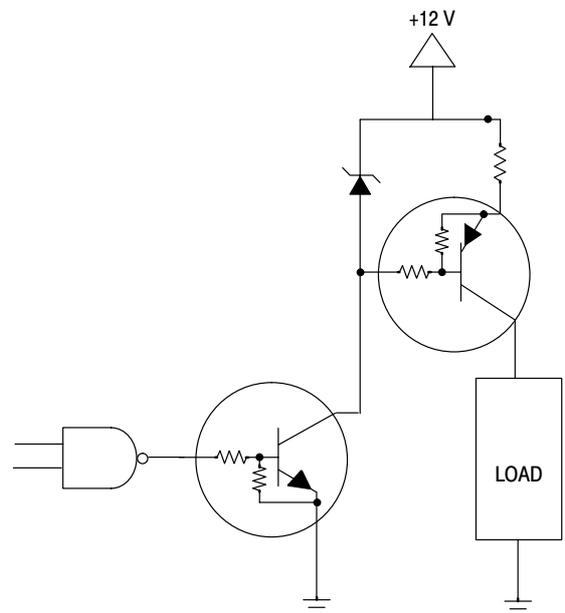


Figure 34. Inexpensive, Unregulated Current Source