

NON-ISOLATED DC/DC CONVERTERS

4.50 – 15V Input / 2.5V Output / 16A

bel
POWER PRODUCTS

BP02S7DC-16D250

S7DC-16D250 Module

- Nonisolated
- Industry standard pinout
- Fixed frequency
- High efficiency means less power dissipation
- High power density
- Optimized for cost
- Remote on/off
- Programmable undervoltage lockout (UVLO)
- Over current and short circuit protection
- Two phase operation
- Non-latching over temperature shutdown protection



Description

The Bel S7DC-16D250 module is one in a series of non-isolated, DC/DC power converters that operate from a wide input range of 3V minimum to 15V maximum. This converter is available with 2.5V output. It uses a low profile, surface mount DIP package for ease of layout and space savings. 16A maximum output is also provided. Standard features include remote on/off, over current and short circuit protection, programmable UVLO and output voltage adjust. Optional features include two-wire remote sense or single-ended remote sense with a good power signal. This module also makes use of adaptive positioning to improve transient response performance. It may be used almost anywhere low voltage silicon is employed and a 4.50 to 15V source is available. Typical applications include file servers, routers, line cards and other computing and communications equipment.

Applications

- Telecommunications
- Networking
- Computers and peripherals

Options

- Double-ended remote sense
- Power good signal

Part Number Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number	Part Number Power Good Signal & Remote Sense	Part Number Double-ended Remote Sense
2.5V	4.50 - 15V	16A	40W	91%	S7DC-16D250	S7DC-16D25S	S7DC-16D25D

Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Continuous Input Voltage	V _{in}	-0.3		15	V
Output Enable Terminal Voltage ¹	V _{outen}	-0.3		6	V
Ambient Temperature	T _{amb}	0		70	°C
Storage Temperature	T _{stor}	-40		105	°C

Note: Use beyond the maximum ratings may cause a reliability degradation of the DC/DC converter or may permanently damage the device.

1. The enable pin performs two functions, remote on/off and programmable under voltage lockout. The factory set UVLO point is 3.0V typical, but can be adjusted upward with the addition of a single external resistor located from the enable pin to ground. Turning the converter on and off is accomplished using an open collector/drain device as a switch. The enable pin is internally pulled up to V_{in} through a 12.1K ohm resistor and the pin's logic is active high.

Input Specifications

Parameter	Symbol	Min	Typical	Max	Units
Operating Input Voltage	V _{in}	4.50		15	V
Input Current (V _{in} =5.0V)	I _{in}			9	A
Input Current (V _{in} =12.0V)	I _{in}			4	A
No Load Input Current (V _{in} =5.0V)	I _{in}			170	mA
No Load Input Current (V _{in} =12.0V)	I _{in}			140	mA
Input Reflected Ripple Current ¹				50	mA _{rms}
Input Reflected Ripple Current (P-P) ¹				100	mApk
I ² t Inrush Current Transient				0.1	A ² s
Turn On Voltage Threshold ²			3.93		V
Turn Off Voltage Threshold		3.50	3.73	3.80	V

Note: Input capacitance 100μF/16V, ESR = 0.03 Ω max at 100kHz @ 25° C.

1. With simulated source impedance of 500nH, 5Hz to 20MHz.

2. UVLO is adjustable by terminating on/off pin to ground per the termination resistance table on page 6.

NON-ISOLATED DC/DC CONVERTERS

4.50 – 15V Input / 2.5V Output / 16A



BP02S7DC-16D250

Output Specifications

Parameter	Symbol	Min	Typical	Max	Units
Output Voltage Set Point	Vout	2.5	2.55	2.6	V
Load Regulation (Droop Impedance)	Rout	2	2.5	3	mΩ
Line Regulation Input Voltage 4.75V to 15V			15	25	mV
Line Regulation Input Voltage 12V ±20%			3	10	mV
Regulation Over Temperature 0° - 70° C			10	25	mV
Output Ripple and Noise ¹			25	40	mVp-p
Output Ripple and Noise ¹			10	20	mVrms
Output Current Range	Iout	0		16	A
Output DC Current Limit	Ioutlim	18		22	A
Turn on Time Vin to Vout or on/off to Vout	Ton		8	10	ms
Overshoot at Turn On			0	1	%
Output Capacitance	Cout	100		2200	μF
Transient Response ² (Vin=5.0V)					
ΔV 50% to 100% of Max Load			120	150	mV
Settling Time	Ts		100	120	μs
ΔV 100% to 50% of Max Load			120	150	mV
Settling Time	Ts		100	120	μs
Transient Response ² (Vin=12.0V)					
ΔV 50% to 100% of Max Load			110	140	mV
Settling Time	Ts		100	120	μs
ΔV 100% to 50% of Max Load			110	140	mV
Settling Time	Ts		100	120	μs

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

1. 0 - 20MHz BW, 0.1μF ceramic cap on output.
2. di/dt = 1A/1μs, Ta = 25° C with a 560μF oscon cap on output.

General Specifications

Parameter	Symbol	Min	Typical	Max	Units
Efficiency ¹ (Vin=5.0V)	η	90	91		%
Efficiency ² (Vin=12.0V)	η	86.5	87.5		%
Switching Frequency	Fsw	495	550	605	kHz
Output Voltage Trim Range ³		90		110	%
Remote Sense Compensation (when option specified)				0.5	mV
Weight			16		g

1. Vin=5V, full load and Ta=25° C.

2. Vin=12V, full load and Ta=25° C.

3. See graph on page 6.

Control Specifications

Parameter	Symbol	Min	Typical	Max	Units
Remote On/Off Open Circuit Voltage (Vin=5.0V)	Vouten			2.1	V
Remote On/Off Open Circuit Voltage (Vin=12.0V)	Vouten			5.1	V
Remote On/Off Impedance Limitation (pin pulled up to +Vin)	Renable			11.5	k Ω
Signal Low (Unit Off)		-0.3		0.3	V
Signal High (Unit On)		1.5		5.5	V
Power Good Levels (when option specified)	Vpg				
Signal Low			0.18	0.4	V
Current Sink				4	mA
Signal High (signal is open collector)				5	V
Under Voltage Threshold Vout rising			3.04		V
Under Voltage Threshold Vout falling			2.97		V

Note: On/off pin designed to work with an open collector/drain switch.


NON-ISOLATED DC/DC CONVERTERS

4.50 – 15V Input / 2.5V Output / 16A



BP02S7DC-16D250


Efficiency Data

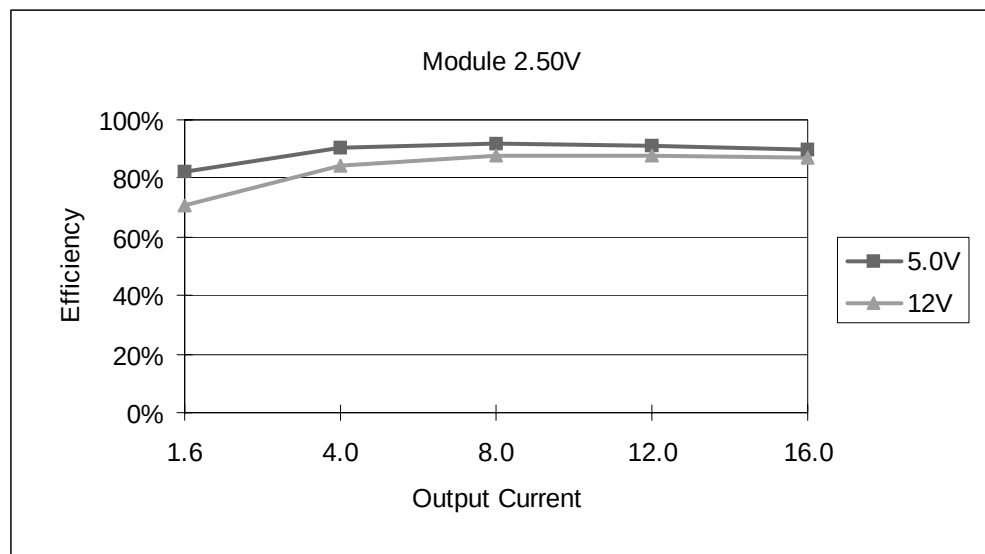


Termination Resistance

Termination Resistance	Rising Vin UVLO	Falling Vin UVLO
Open Circuit	3.93V	3.73V
21K Ω	4.50V	4.33V
5.90K Ω	6.06V	5.86V
4.99K Ω	6.48V	6.24V
3.06K Ω	8.10V	7.65V
2.61K Ω	9.09V	8.56V
2.10K Ω	10.54V	9.55V
2.05K Ω	10.72V	9.69V

UVLO

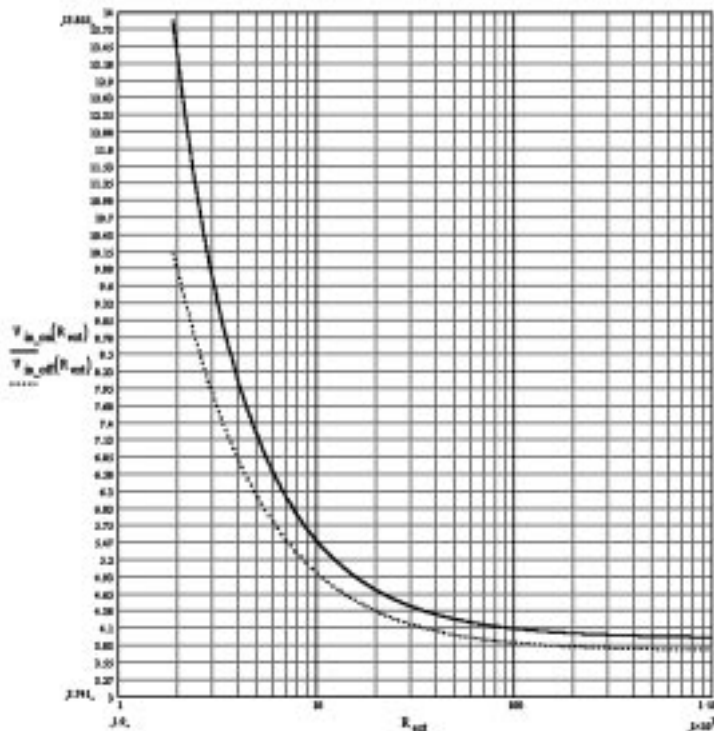

Output Voltage Trim Range

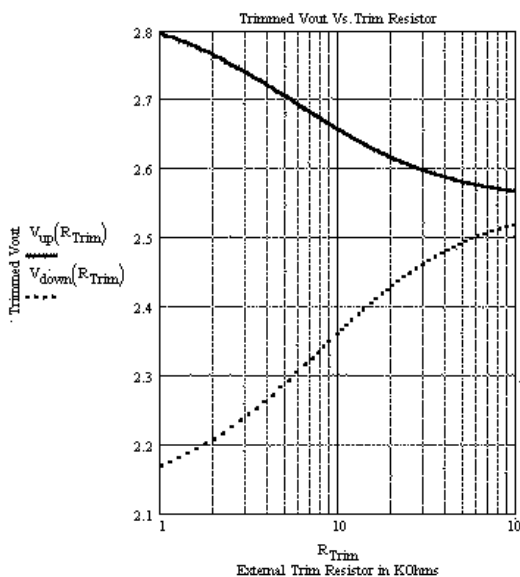

$$V_{up}(10^9) = 2.55$$

$$V_{down}(10^9) = 2.55$$

Trimmed Vout for Various K-Ohm E96 Resistor Values

$$V_{up}(30.1) = 2.597$$

$$V_{down}(30.1) = 2.461$$

$$V_{up}(12.1) = 2.644$$

$$V_{down}(12.1) = 2.38$$

$$V_{up}(10) = 2.657$$

$$V_{down}(10) = 2.36$$

$$V_{up}(5.11) = 2.704$$

$$V_{down}(5.11) = 2.289$$

$$V_{up}(4.32) = 2.716$$

$$V_{down}(4.32) = 2.272$$

$$V_{up}(3.83) = 2.725$$

$$V_{down}(3.83) = 2.26$$

$$V_{up}(3.01) = 2.741$$

$$V_{down}(3.01) = 2.238$$

$$V_{up}(2.87) = 2.744$$

$$V_{down}(2.87) = 2.234$$

$$V_{up}(2.67) = 2.748$$

$$V_{down}(2.67) = 2.228$$

$$V_{up}(2.00) = 2.765$$

$$V_{down}(2.00) = 2.207$$

$$V_{up}(1.00) = 2.796$$

$$V_{down}(1.00) = 2.168$$

$$V_{up}(0) = 2.838$$

$$V_{down}(0) = 2.12$$


NON-ISOLATED DC/DC CONVERTERS

4.50 – 15V Input / 2.5V Output / 16A




BP02S7DC-16D250

Ripple and Noise

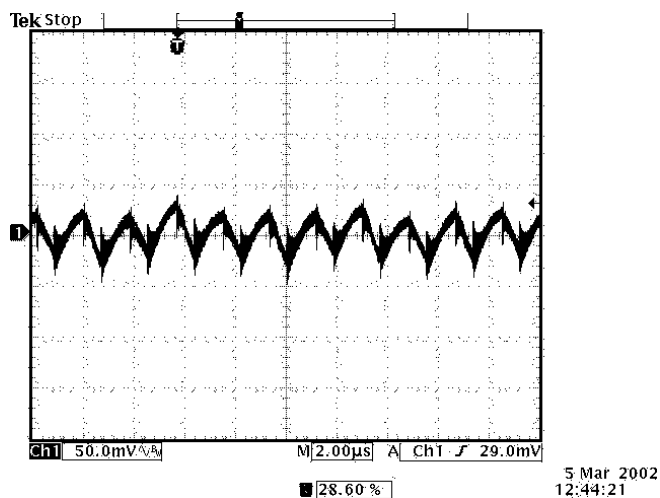

Ripple and noise at full load and 12.0Vdc input,
and $T_a=25^\circ\text{C}$

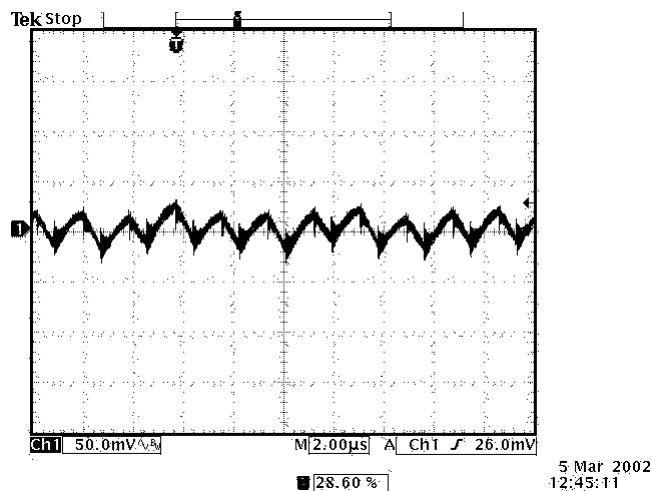


Ripple and noise at full load and 12.0Vdc input,
and $T_a=25^\circ\text{C}$ with 560 μF external cap


BP02S7DC-16D250

Transient Response

Transient response: $di/dt = 1.0A/\mu S$

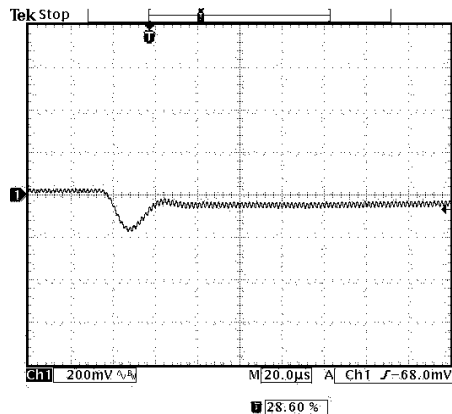


Vout=2.5V
50% to 100% load transients at 12.0V input and Ta=25° C

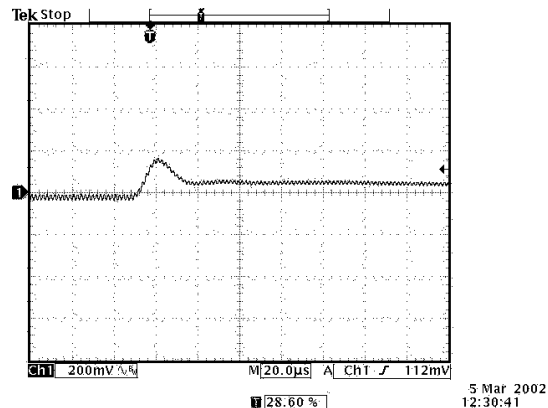


Vout=2.5V
100% to 50% load transients at 12.0V input and Ta=25° C

Transient response: $di/dt = 1.0A/\mu S$, external load capacitance 560μF

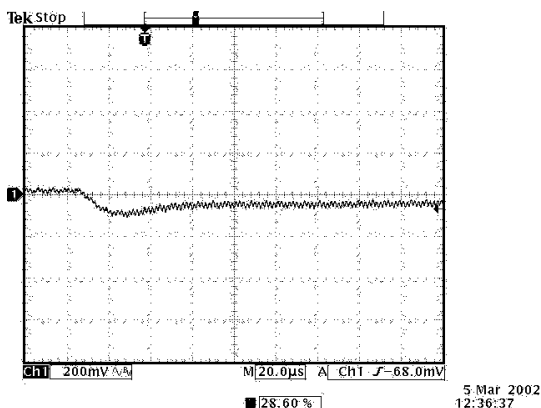

Vout=2.5V
50% to 100% load transients at 12.0V input and Ta=25° C

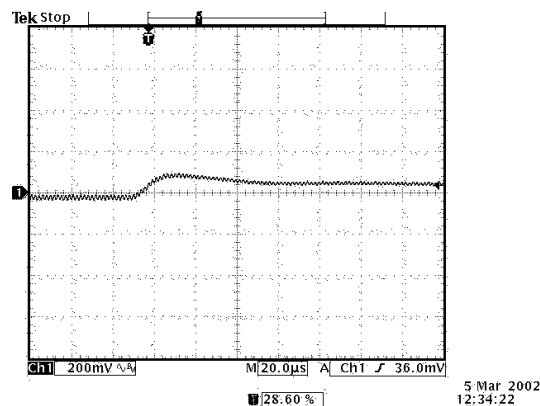

Vout=2.5V
100% to 50% load transients at 12.0V input and Ta=25° C



NON-ISOLATED DC/DC CONVERTERS

4.50 – 15V Input / 2.5V Output / 16A




BP02S7DC-16D250

Thermal Considerations

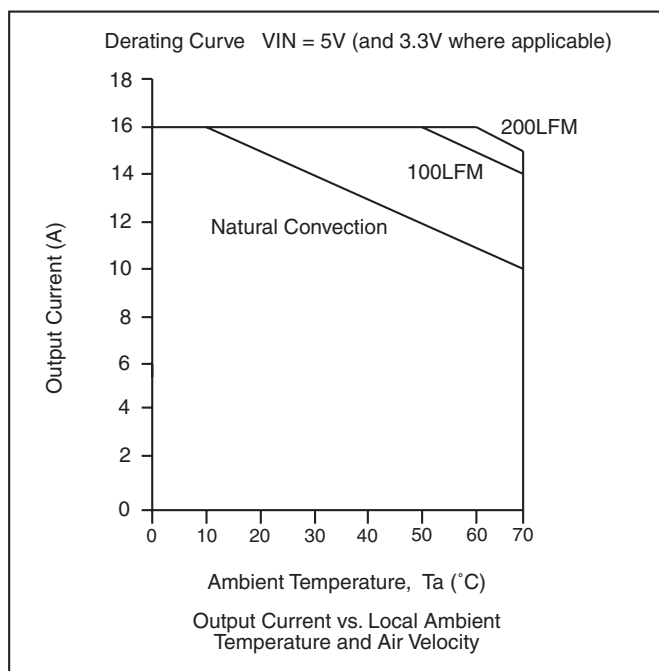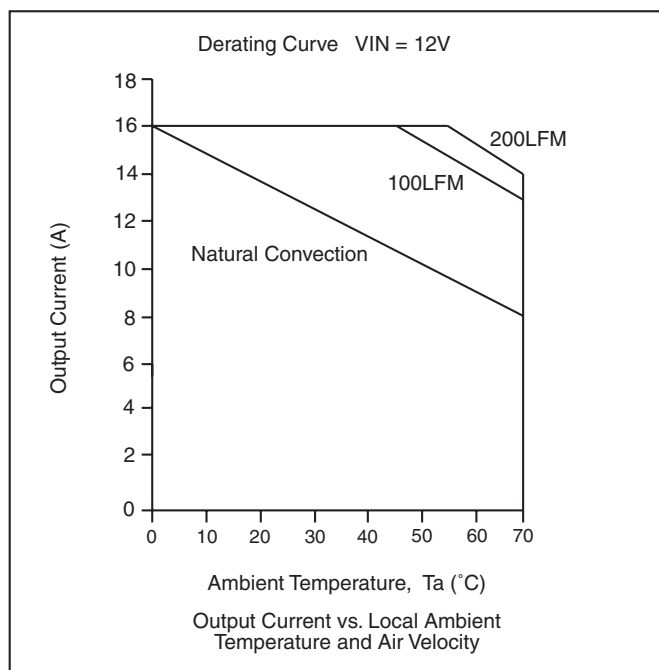

BP02S7DC-16D250

Mechanical

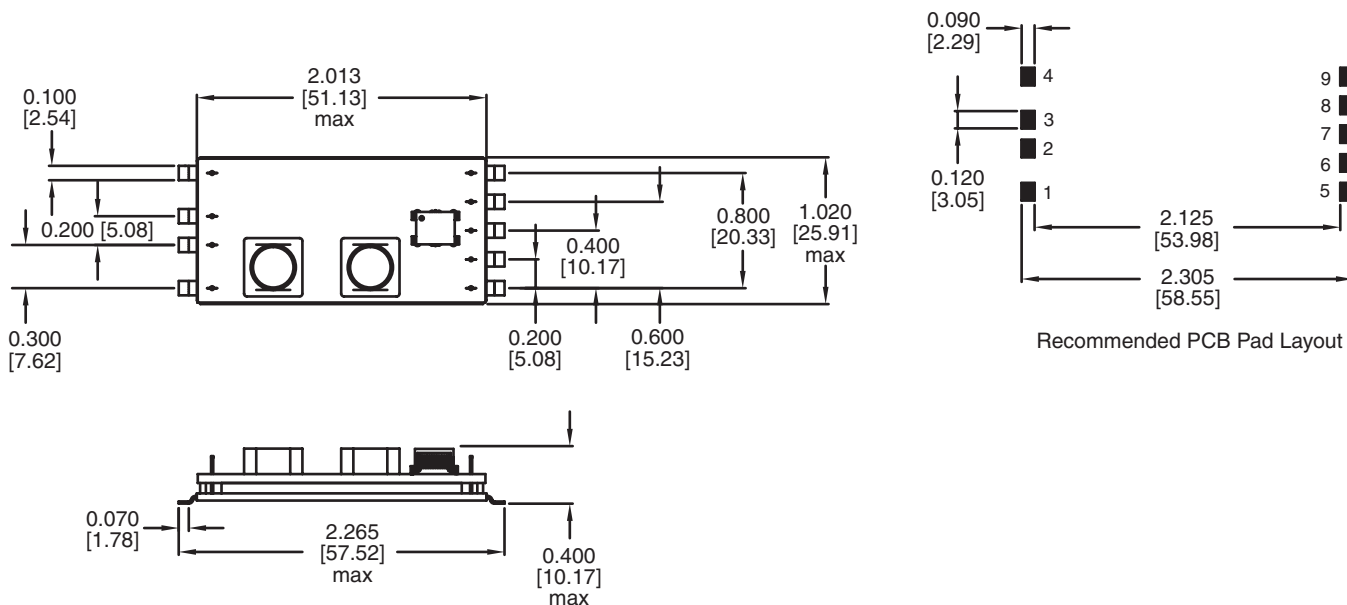

Dimensions are in inches [millimeters].
Standard dimension tolerance is ± 0.005 [0.13] unless otherwise noted.

Pin	Function
1	Control Ground
2	On/Off Control
3 ¹	No Connection
4 ²	No Connection
5	+Vo
6	Trim
7	Power Ground
8	Power Ground
9	+Vin

1. Pin 3 not used on module S7DC-16D250, used for - sense on S7DC-16D25D and used for power good signal on the S7DC-16D33S module.

2. Pin 4 not used on module S7DC-16D250, used for + sense on both the S7DC-16D25S and S7DC-16D25D modules.

©2003 Bel Fuse Inc. Specifications subject to change without notice. 03.03

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com