

# $\mu$ A739 • $\mu$ A749 Dual Audio Operational Amplifier / Preamplifier

Linear Products

### Description

The  $\mu$ A739 and  $\mu$ A749 consist of two identical High-Gain Operational Amplifiers constructed on a single silicon chip using the Fairchild Planar epitaxial process. These 3-stage amplifiers use Class A PNP transistor output stages with uncommitted collectors. This enables a variety of loads to be employed for general purpose applications from dc to 10 MHz, where two high performance operational amplifiers are required. In addition, the outputs may be wired-OR for use as a dual comparator or they may function as diodes in low threshold rectifying circuits such as absolute value amplifiers, peak detectors, etc.

- SINGLE OR DUAL SUPPLY OPERATION
- LOW POWER CONSUMPTION
- HIGH GAIN, 25,000 V/V
- LARGE COMMON MODE RANGE, +11 V, -13 V
- EXCELLENT GAIN STABILITY VS. SUPPLY VOLTAGE
- NO LATCH-UP
- OUTPUT SHORT CIRCUIT PROTECTED


### Absolute Maximum Ratings

|   |   |
|---|---|
| Supply Voltage  |   |
| ( $\mu$ A749, $\mu$ A749C, $\mu$ A739)                                | $\pm 18$ V                                      |
| ( $\mu$ 749D)   | $\pm 12$ V                                      |
| Internal Power Dissipation<br>(Note 1)                                |   |
| Metal Package   | 500 mW  |
| DIP   | 650 mW  |
| Differential Input Voltage  | $\pm 5$ V                                       |
| Input Voltage (Note 2)  |   |
| ( $\mu$ A749, $\mu$ A749C, $\mu$ A739)                                | $\pm 15$ V                                      |
| ( $\mu$ A749D)  | $\pm 12$ V                                      |
| Storage Temperature Range   |   |
| Metal Package and<br>Ceramic DIP                                      | $-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |
| Molded DIP  | $-55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ |
| Operating Temperature Range   | $0^{\circ}\text{C}$ to $+70^{\circ}\text{C}$    |
| Pin Temperature   |   |
| Metal Package, Ceramic DIP<br>(Soldering, 60 s)                       | $300^{\circ}\text{C}$                           |
| Molded DIP (Soldering, 10 s)  | $260^{\circ}\text{C}$                           |
| Output Short Circuit Duration,<br>$T_A = 25^{\circ}\text{C}$ (Note 3) | 30 seconds                                      |

### Notes

1. Rating applies to ambient temperatures up to  $70^{\circ}\text{C}$ . Above  $70^{\circ}\text{C}$  ambient derate linearly at  $8.3\text{ mW}/^{\circ}\text{C}$  for the Ceramic DIP.
2. For supply voltages less than  $\pm 15$  V, the absolute maximum input voltage is equal to the supply voltage.
3. Short circuit may be to ground or either supply.

### Connection Diagram 8-Pin Metal Package




(Top View)

Pin 4 is connected to case.

### Order Information

| Type        | Package | Code | Part No.      |
|-------------|---------|------|---------------|
| $\mu$ A749D | Metal   | 5W   | $\mu$ A749DHC |

### Connection Diagram 14-Pin DIP

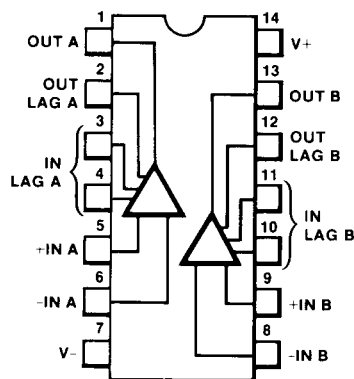


(Top View)

### Order Information

| Type        | Package     | Code | Part No.     |
|-------------|-------------|------|--------------|
| $\mu$ A739C | Ceramic DIP | 6A   | $\mu$ A739DC |
| $\mu$ A739C | Molded DIP  | 9A   | $\mu$ A739PC |
| $\mu$ A749C | Ceramic DIP | 6A   | $\mu$ A749DC |
| $\mu$ A749C | Molded DIP  | 9A   | $\mu$ A749PC |

Equivalent Circuit

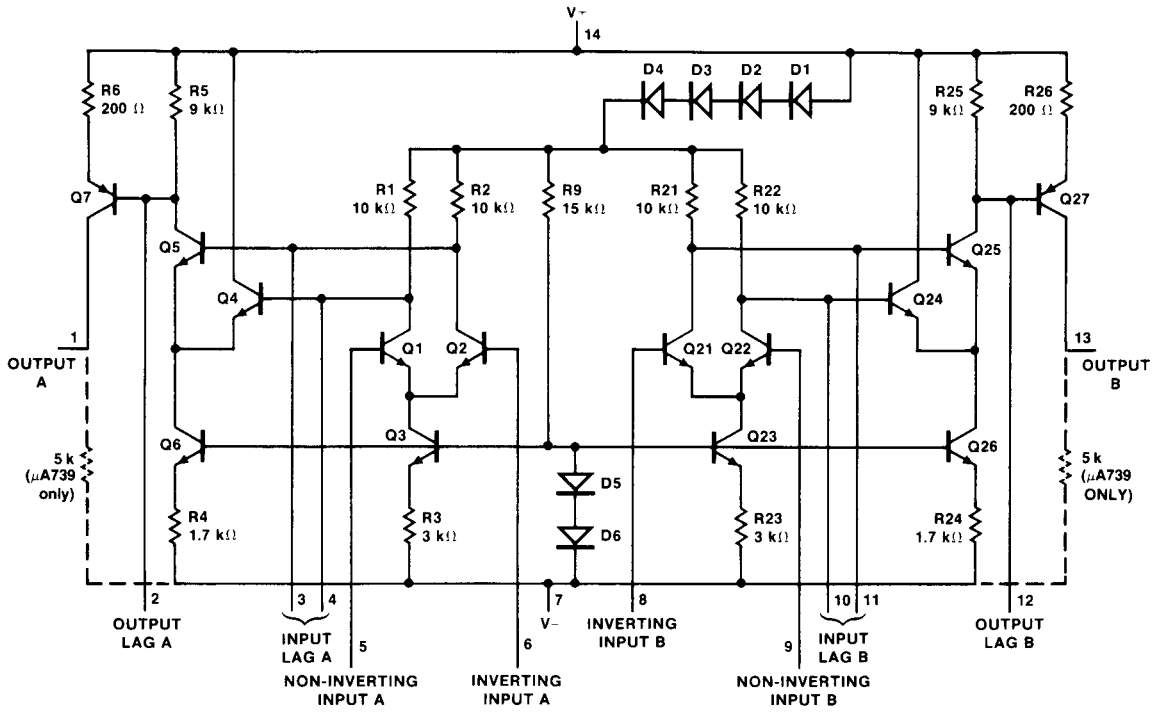

Pin numbers for DIP only.

$\mu$ A749C,  $\mu$ A749D and  $\mu$ A739E

**Electrical Characteristics**  $V_+ = \pm 15$  V,  $R_L = 5$  k $\Omega$  to Pin 7,  $T_A = 25^\circ$ C unless otherwise specified

| Characteristic  | Condition   |
|---|---|
| Input Offset Voltage  | $R_S = 200 \Omega$                                      |
| Input Offset Current  |   |
| Input Bias Current  |   |
| Input Resistance  |   |
| Large Signal Voltage Gain   | $V_{OUT} = \pm 10$ V                                    |
| Positive Output Voltage Swing   |   |
| Negative Output Voltage Swing   |   |
| Output Resistance   | $f = 1.0$ kHz   |
| Common Mode Rejection Ratio   | $R_S = 200 \Omega$ , $V_{IN} = +11.5$ V to $-13.5$ V    |
| Supply Voltage Rejection Ratio  | $R_S = 200 \Omega$                                      |
| Input Voltage Range   |   |
| Internal Power Dissipation  | $V_{OUT} = 0$   |
| Supply Current  | $V_{OUT} = 0$   |
| Broadband Noise Figure  | $R_S = 10$ k $\Omega$ , BW = 10 Hz to 10 kHz            |
| Turn On Delay (See Figure 3)  | Open Loop, $V_{IN} = \pm 20$ mV                         |
| Turn Off Delay (See Figure 3)   | Open Loop, $V_{IN} = \pm 20$ mV                         |
| Slew Rate (unity gain) (See Figure 2)   | $C_1 = 0.02 \mu$ F, $R_1 = 33 \Omega$ , $C_2 = 10$ pF   |
| Channel Separation (See Figure 4)   | $R_S = 1$ k $\Omega$ , $f = 10$ kHz                     |
| The following specifications apply for $V_+ = \pm 4.0$ V, $R_L = 10$ k $\Omega$ to Pin 7, $T_A = 25^\circ$ C            |   |
| Input Offset Voltage  | $R_S = 200 \Omega$                                      |
| Input Offset Current  |   |
| Input Bias Current  |   |
| Supply Current  | $V_{OUT} = 0$   |
| Internal Power Dissipation  | $V_{OUT} = 0$   |
| Large Signal Voltage Gain   | $V_{OUT} = \pm 2.0$ V                                   |
| Positive Output Voltage Swing   |   |
| Negative Output Voltage Swing   |   |
| The following specifications apply for $T_A = T_{HIGH}$ to $T_{LOW}$ , $V_S = \pm 15$ V, $R_L = 5$ k $\Omega$ to Pin 7. |   |
| Large Signal Voltage Gain   | $V_{OUT} = \pm 10$ V, $T_A = HIGH$                      |
|   | $V_{OUT} = \pm 10$ V, $T_A = LOW$                       |
| Positive Output Voltage Swing   |   |
| Negative Output Voltage Swing   |   |
| Input Offset Voltage  | $R_S = 200 \Omega$                                      |
| Input Offset Current  | $T_A = HIGH$  |
|   | $T_A = LOW$   |
| Input Bias Current  | $T_A = HIGH$  |
|   | $T_A = LOW$   |
| Input Offset Voltage Drift  | $R_S = 200 \Omega$ , $+25^\circ$ C $\leq T_A \leq HIGH$ |
|   | $R_S = 200 \Omega$ , $LOW \leq T_A \leq +25^\circ$ C    |

| μA749C |        |     | μA749D V <sub>CC</sub> = ± 6 V<br>R <sub>L</sub> = 10 K |        |      | μA739C |        |      | Units |
|--------|--------|-----|---|--------|------|--------|--------|------|-------|
| Min    | Typ    | Max | Min   | Typ    | Max  | Min    | Typ    | Max  |       |
|        | 1.0    | 6.0 |   | 1.0    | 10   |        | 1.0    | 6.0  | mV    |
|        | 50     | 750 |   | 50     | 600  |        | 50     | 1000 | nA    |
|        | 0.3    | 1.5 |   | 0.3    | 1.5  |        | 0.3    | 2.0  | μA    |
| 50     | 150    |     | 50  | 150    |      | 37     | 150    |      | kΩ    |
| 15,000 | 50,000 |     | 10,000  | 20,000 |      | 6,500  | 20,000 |      | V/V   |
| +12    | +13    |     | +4.5  | +5.0   |      | +12    | +13    |      | V     |
| -14    | -15    |     | -5.5  | -6.0   |      | -14    | -15    |      | V     |
|        | 5.0    |     |   | 10     |      |        | 5.0    |      | kΩ    |
| 70     | 90     |     | 70  | 90     |      | 70     | 90     |      | dB    |
|        | 50     | 350 |   | 50     | 100  |        | 50     |      | μV/V  |
| -13    |        | +11 | -4  |        | +2.5 | -10    |        | +11  | V     |
|        | 180    | 330 |   |        |      |        |        |      | mW    |
|        | 9.0    | 14  | 2.0   | 3.0    | 4.5  |        | 9.0    | 14   | mA    |
|        | 2.5    |     |   | 2.5    |      |        | 2.0    |      | dB    |
|        | .2     |     |   | .2     |      |        | .2     |      | μs    |
|        | .3     |     |   | .3     |      |        | .3     |      | μs    |
|        | 1.0    |     |   | 1.0    |      |        | 1.0    |      | V/μs  |
|        | 140    |     |   | 140    |      |        | 140    |      | dB    |

|        |        |     |  |  |  |       |        |      |     |
|--------|--------|-----|--|--|--|-------|--------|------|-----|
|        |        | 6.0 |  |  |  |       | 1.0    | 6.0  | mV  |
|        | 50     | 600 |  |  |  |       | 50     | 1000 | nA  |
|        | .3     | 1.5 |  |  |  |       | 300    |      | μA  |
|        | 2.5    |     |  |  |  |       | 2.5    |      | mA  |
|        | 20     |     |  |  |  |       | 20     |      | mW  |
| 15,000 | 60,000 |     |  |  |  | 2,500 | 15,000 |      | V/V |
| +2.5   | +2.8   |     |  |  |  | +2.5  | +2.8   |      | V   |
| -3.6   | -4.0   |     |  |  |  | -3.6  | -4.0   |      | V   |

|        |        |     |  |  |  |  |  |  |       |
|--------|--------|-----|--|--|--|--|--|--|-------|
| 8,000  | 40,000 |     |  |  |  |  |  |  | V/V   |
| 15,000 | 50,000 |     |  |  |  |  |  |  | V/V   |
| +12    | +13    |     |  |  |  |  |  |  | V     |
| -14    | -15    |     |  |  |  |  |  |  | V     |
|        | 1.0    | 9.0 |  |  |  |  |  |  | mV    |
|        | .05    | 1.5 |  |  |  |  |  |  | μA    |
|        | .05    | 1.5 |  |  |  |  |  |  | μA    |
|        | .3     | 3.0 |  |  |  |  |  |  | μA    |
|        | .3     | 3.0 |  |  |  |  |  |  | μA    |
|        | 3.0    |     |  |  |  |  |  |  | μV/°C |
|        | 3.0    |     |  |  |  |  |  |  | μV/°C |

4

$\mu A749C$ ,  $\mu A749D$  and  $\mu A739C$

Electrical Characteristics (Cont.)  $V_+ = \pm 15\text{ V}$ ,  $R_L = 5\text{ k}\Omega$  to Pin 7,  $T_A = 25^\circ\text{C}$  unless otherwise specified


| Characteristics            | Condition                             |
|----------------------------|---------------------------------------|
| Input Offset Current Drift | $+25^\circ\text{C} \leq T_A$          |
| Input Bias Current Drift   | $LOW \leq T_A \leq +25^\circ\text{C}$ |
| Supply Current             | $V_{OUT} = 0, T_A = HIGH$             |
| Internal Power Dissipation | $V_{OUT} = 0, T_A = LOW$              |
|                            | $V_{OUT} = 0, T_A = HIGH$             |
|                            | $V_{OUT} = 0, T_A = LOW$              |

The following specifications apply for  $T_{HIGH}$  to  $T_{LOW}$ ,  $V_S = \pm 4.5\text{ V}$ ,  $R_L = 10\text{ k}\Omega$  to Pin 7.


|                               |                                     |
|-------------------------------|-------------------------------------|
| Input Offset Voltage          | $R_S = 200\ \Omega$                 |
| Input Offset Current          |                                     |
| Large Signal Voltage Gain     | $V_{OUT} = \pm 2.0\text{ V}, T_A =$ |
| Positive Output Voltage Swing | $V_{OUT} = \pm 2.0\text{ V}, T_A =$ |
| Negative Output Voltage Swing |                                     |

Typical Performance Curves for  $\mu A749C$  and  $\mu A739C$


Closed Loop Gain as a Function of Frequency

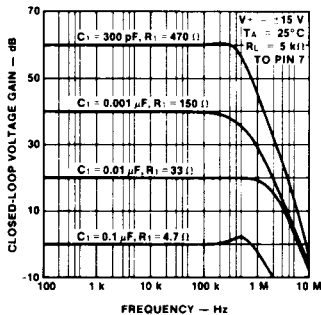


Open Loop Frequency Response Using Recommended Compensation Networks




Output Capability as a Function of Frequency and Compensation




Open Loop Phase Shift Without Compensation



Channel Separation as Function of Frequency




Change of AC Characteristics With Temperature




| μA749C |      |       | μA749D $V_{CC} = \pm 6V$<br>$R_L = 10K$ |     |     | μA739C |     |     |       |
|--------|------|-------|---|-----|-----|--------|-----|-----|-------|
| Min    | Typ  | Max   | Min                                     | Typ | Max | Min    | Typ | Max | Units |
|        | .5   |       |   |     |     |        |     |     | nA/°C |
|        | 2.0  |       |   |     |     |        |     |     | nA/°C |
|        | 4.0  |       |   |     |     |        |     |     | nA/°C |
|        | 10   |       |   |     |     |        |     |     | mA    |
|        | 10   |       |   |     |     |        |     |     | mA    |
|        | 100  |       |   |     |     |        |     |     | mW    |
|        | 200  |       |   |     |     |        |     |     | mW    |
|        | 1.5  | 7.0   |   |     |     |        |     |     | mV    |
|        | 50   | 1,000 |   |     |     |        |     |     | nA    |
| 8,000  |      |       |   |     |     |        |     |     | V/V   |
| 15,000 |      |       |   |     |     |        |     |     | V/V   |
| +2.5   | +2.8 |       |   |     |     |        |     |     | V     |
| -3.6   | -4.0 |       |   |     |     |        |     |     | V     |

Typical Performance Curves for μA749D


Closed Loop Gain as a Function of Frequency




Open Loop Frequency Response Using Recommended Compensation Networks




Output Voltage Swing as a Function of Frequency for Various Compensation Networks

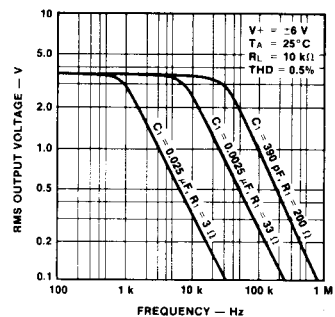


Open Loop Voltage Gain As a Function of Supply Voltage



Open Loop Voltage Gain As a Function of Load Resistance




Typical Output Voltage As a Function of Supply Voltage




Typical Performance Curves for  $\mu$ A749D (Cont.)


Open Loop Gain As a Function of Temperature



Total Supply Current As a Function of Supply Voltage




Total Power Dissipation As a Function of Supply Voltage and Load




Typical Performance Curves for  $\mu$ A749 and  $\mu$ A749C


Common Mode Range As a Function of Supply Voltage




Input Noise Voltage as a Function of Frequency




Input Noise Current as a Function of Frequency




Absolute Maximum Power Dissipation as a Function of Temperature



Open Loop 180° Phase Shift Frequency as a Function of Supply Voltage




Common Mode Range as a Function of Supply Voltage




Typical Performance Curves for  $\mu A749$  and  $\mu A749C$  (Cont.)


Typical Output Voltage as a Function of Supply Voltage




Open Loop Voltage Gain as a Function of Load Resistance




Total Supply Current as a Function of Supply Voltage




Total Power Dissipation as a Function of Supply Voltage and Load



Open Loop Voltage Gain as a Function of Supply Voltage

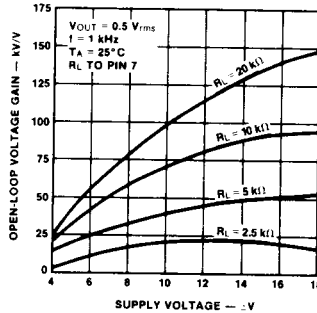


Open Loop Gain as a Function of Temperature




Typical Performance Curves for  $\mu A739C$


Input Offset Current and Bias Current as Functions of Temperature



Input Noise Voltage as a Function of Frequency




Input Noise Current as a Function of Frequency






Typical Performance Curves for  $\mu$ A739C (Cont.)


Wide Band Input Noise Voltage as a Function of Temperature




Wide Band Input Noise Current as a Function of Temperature

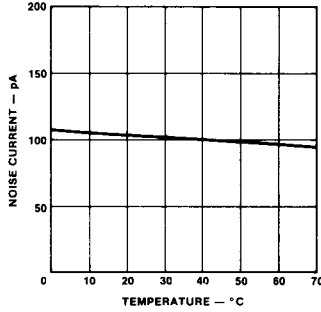


Common Mode Range as a Function of Supply Voltage




Typical Output Voltage as a Function of Supply Voltage




Output Capability as a Function of Supply Voltage




Total Supply Current as a Function of Supply Voltage




Total Power Dissipation as a Function of Supply Voltage and Load



Open Loop Voltage Gain as a Function of Supply Voltage




Open Loop Gain as a Function of Temperature




Typical Performance Curves for  $\mu\text{A739C}$  (Cont.)

Input Offset Current and Bias Current as a Function of Temperature



Typical Applications

Stereo Phono Preamplifier—RIAA Equalized


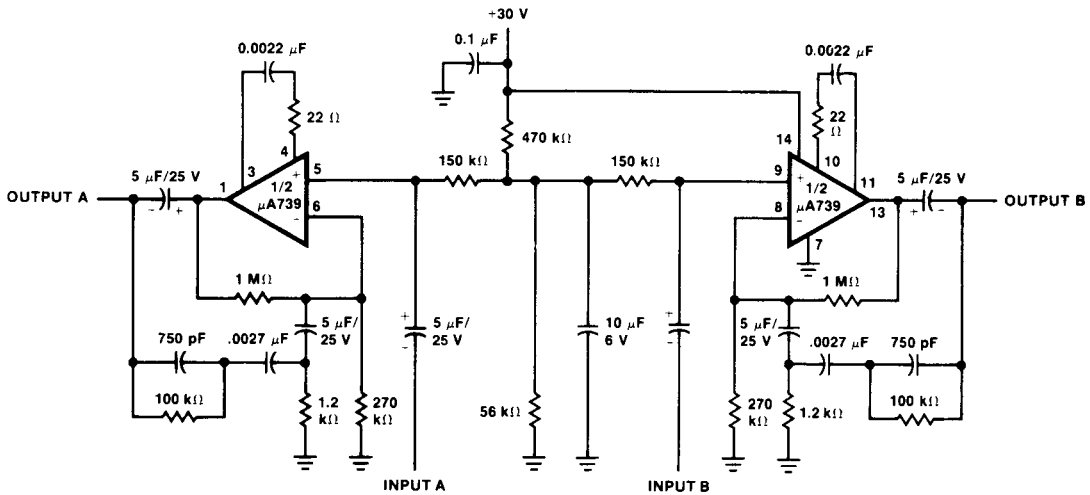


Typical Performance

- Gain 40 dB at 1 kHz, RIAA equalized
- Input overload point, 80 mV rms
- Noise Level, 2 μV referred to input
- Signal to noise ratio, 74 dB below 10 mW
- Channel separation @ 1 kHz, 80 dB

Typical Applications (Cont.)

Stereo Tape Preamplifier

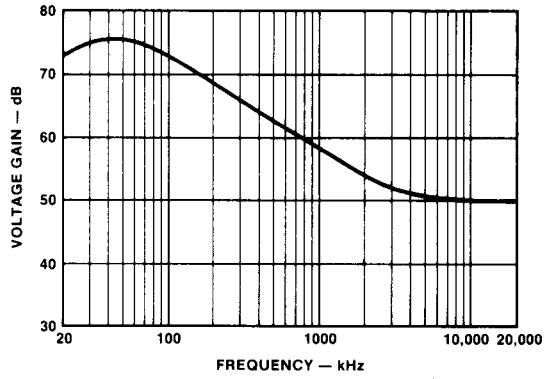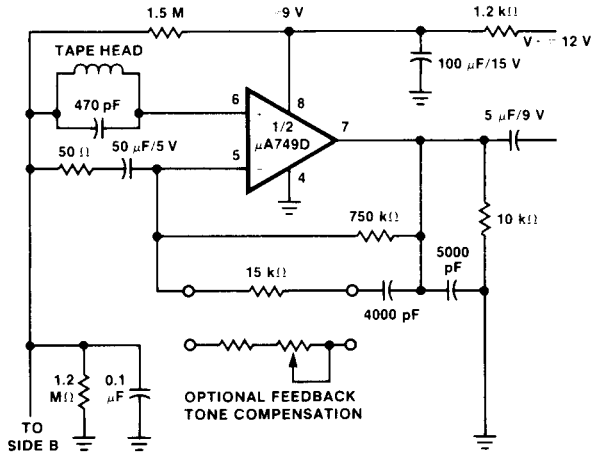

Typical Performance

|                      |           |
|----------------------|-----------|
| Gain at 1 kHz        | 60 dB     |
| Output Voltage Swing | 2.8 V rms |
| Power Consumption    | 30 mW     |