




9.6×9.6 Square/ Single Turn /Trimming Potentiometer

-- 3386T--


... Mutual dimension.....

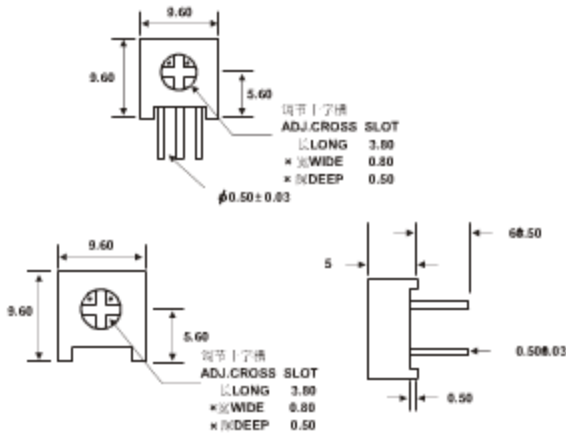

Standard Resistance Table


| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10 | 100 |
| 20 | 200 |
| 50 | 500 |
| 100 | 101 |
| 200 | 201 |
| 500 | 501 |
| 1,000 | 102 |
| 2,000 | 202 |
| 5,000 | 502 |
| 10,000 | 103 |
| 20,000 | 203 |
| 25,000 | 253 |
| 50,000 | 503 |
| 100,000 | 104 |
| 200,000 | 204 |
| 250,000 | 254 |
| 500,000 | 504 |
| 1,000,000 | 105 |
| 2,000,000 | 205 |

Special resistances available

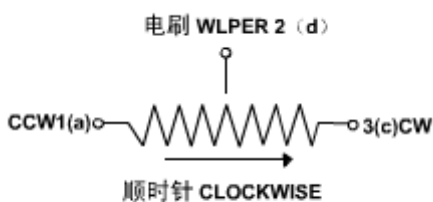

图中公式：除注明外均为±0.25
Tolerance is ± 0.25 if no identification

... Install dimension.....



Electrical Characteristics

Standard Resistance Range.....50Ω~2MΩ
Resistance Tolerance.....±10%
Absolute Minimum Resistance.....≤1%R或10Ω
Contact Resistance Variation.....CRV≤3%
Insulation Resistance.....R1≥1GΩ (100Vac)
Withstand Voltage.....600Vac
Effective Travel.....300°

Environmental Characteristics

Power Rating, 315 volts max
.....0.5W@70°C,0W@125°C
Temperature Range.....-55°C~125°C
Temperature Coefficient.....±250ppm/°C
Temperature Variation.....-55°C,30min,+125°C
.....30min
5cycles
.....ΔR≤5%R,Δ(Uab/Uac)≤10%
Collision.....100m/s²,1000cycles,ΔR≤2%R
Electrical Endurance at 70°C.....0.5W@70°C
.....1000h,ΔR≤10%R
.....Δ(Uab/Uac)≤10%,CRV≤3% or 5Ω
Rotational Life.....200cycles
.....ΔR≤10%R,CRV≤3% or 5Ω

Physical Characteristics

How To Order 3386—T—103
型号 Model
式样 Style
阻值代码 Resistance Code