


Series 316 / 416


PCB connectors 2.54 mm
Single row / double row
Solder tail

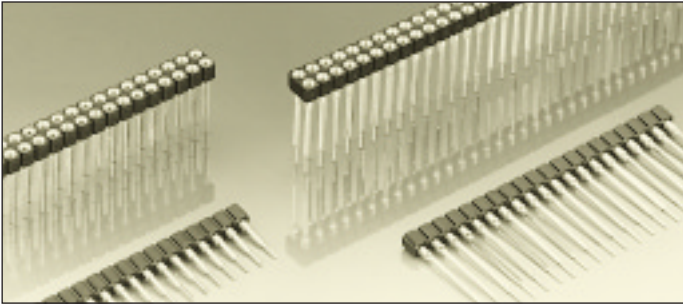

Interconnect receptacles, solder tail

Receptacles accept pins $\varnothing$ 0.40–0.56 mm

For corresponding pin connectors see pages 43 to 46




Platings	Sleeve 	Clip 	Pin 
93	5 μ m Sn Pb	0.75 μ m Au	

Ordering information

Replace **xx** with the number of poles, e.g. 416-93-2xx-41-006 for a double row version with 8 pins per row becomes:
416-93-216-41-006

Option:

On request triple row

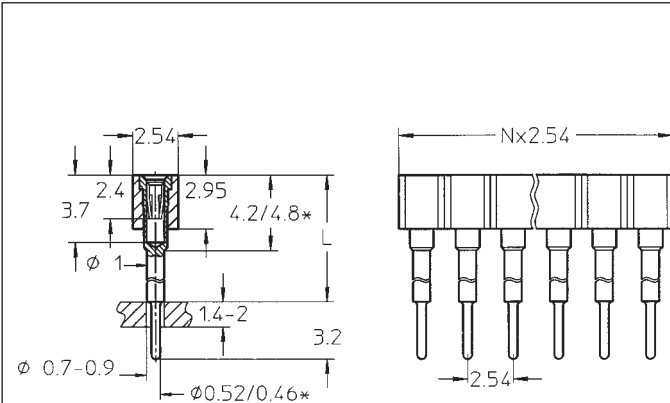

*) only for contact L=9 mm

L =

6 mm 316-93-1xx-41-006

8 mm 316-93-1xx-41-003

9 mm 316-93-1xx-41-012

10 mm 316-93-1xx-41-007

12 mm 316-93-1xx-41-008

13 mm 316-93-1xx-41-009

15 mm 316-93-1xx-41-001


18 mm 316-93-1xx-41-011

22 mm 316-93-1xx-41-004

33 mm 316-93-1xx-41-013

Interconnect receptacle: solder tail, single row

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, and 64

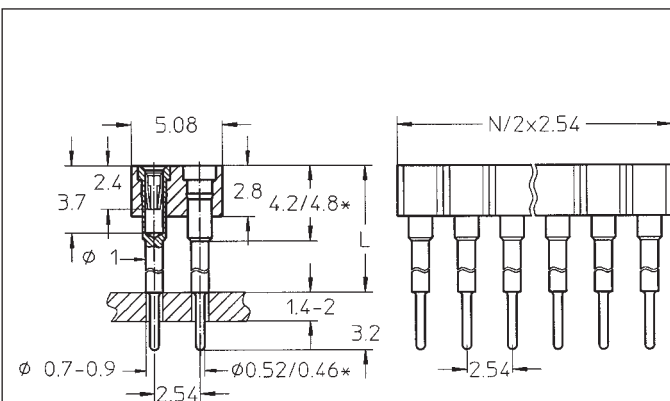

*) only for contact L=9 mm

L =

6 mm 416-93-2xx-41-006

8 mm 416-93-2xx-41-003

9 mm 416-93-2xx-41-012

10 mm 416-93-2xx-41-007

12 mm 416-93-2xx-41-008

13 mm 416-93-2xx-41-009

15 mm 416-93-2xx-41-001

18 mm 416-93-2xx-41-011

22 mm 416-93-2xx-41-004

33 mm 416-93-2xx-41-013

Interconnect receptacle: solder tail, double row

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64 and 72