

DATA SHEET

74LVC74A

Dual D-type flip-flop with set and reset;
positive-edge trigger

Product specification
IC24 Data Handbook

1998 Jun 17

Dual D-type flip-flop with set and reset; positive-edge trigger

74LVC74A

FEATURES

- Wide supply voltage range of 1.2 V to 3.6 V
- In accordance with JEDEC standard no. 8-1A.
- Inputs accept voltages up to 5.5 V
- CMOS low power consumption
- Direct interface with TTL levels
- Output drive capability 50 Ω transmission lines @ 85°C

DESCRIPTION

The 74LVC74A is a high-performance, low-voltage Si-gate CMOS device and superior to most advanced CMOS compatible TTL families.

The 74LVC74A is a dual positive edge triggered, D-type flip-flop with individual data (D) inputs, clock (CP) inputs, set (\overline{S}_D) and (\overline{R}_D) inputs; also complementary Q and \overline{Q} outputs.

The set and reset are asynchronous active LOW inputs and operate independently of the clock input. Information on the data input is transferred to the Q output on the LOW-to-HIGH transition of the clock pulse. The D inputs must be stable one set-up time prior to the LOW-to-HIGH clock transition, for predictable operation.

Schmitt-trigger action in all data inputs makes the circuit highly tolerant to slower clock rise and fall times.

QUICK REFERENCE DATA

GND = 0 V; $T_{amb} = 25^\circ\text{C}$; $t_r = t_f \leq 2.5 \text{ ns}$

| SYMBOL | PARAMETER | CONDITIONS | TYPICAL | UNIT |
|-------------------|--|---|-------------------|------|
| t_{PHL}/t_{PLH} | Propagation delay nCP to nQ, n \overline{Q} n \overline{S}_D to nQ, n \overline{Q} n \overline{R}_D to nQ, n \overline{Q} | $C_L = 50 \text{ pF}$; $V_{CC} = 3.3 \text{ V}$ | 3.6 3.5 3.5 | ns |
| f_{max} | Maximum clock frequency | | 250 | MHz |
| C_I | Input capacitance | | 5.0 | pF |
| C_{PD} | Power dissipation capacitance per flip-flop | Notes 1 and 2 | 30 | pF |


NOTES:

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW)
 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o) + \sum (V_o^2/R_L) \times \text{duty factor LOW}$, where:
 f_i = input frequency in MHz; C_L = output load capacity in pF;
 f_o = output frequency in MHz; V_{CC} = supply voltage in V;
 $\sum (C_L \times V_{CC}^2 \times f_o)$ = sum of the outputs.
2. The condition is $V_I = \text{GND to } V_{CC}$.


ORDERING INFORMATION

| PACKAGES | TEMPERATURE RANGE | OUTSIDE NORTH AMERICA | NORTH AMERICA | DWG NUMBER |
|-----------------------------|-------------------|-----------------------|---------------|------------|
| 14-Pin Plastic SO | -40°C to +85°C | 74LVC74A D | 74LVC74A D | SOT108-1 |
| 14-Pin Plastic SSOP Type II | -40°C to +85°C | 74LVC74A DB | 74LVC74A DB | SOT337-1 |
| 14-Pin Plastic TSSOP Type I | -40°C to +85°C | 74LVC74A PW | 74LVC74APW DH | SOT402-1 |

PIN CONFIGURATION

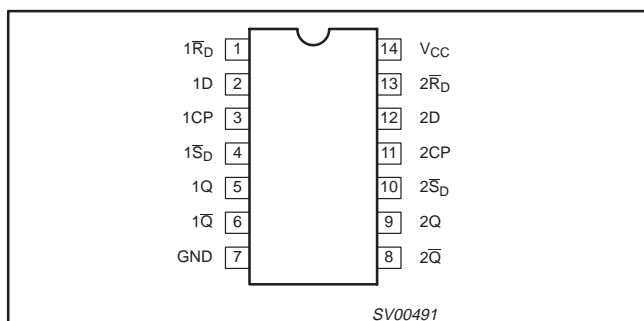

LOGIC SYMBOL (IEEE/IEC)

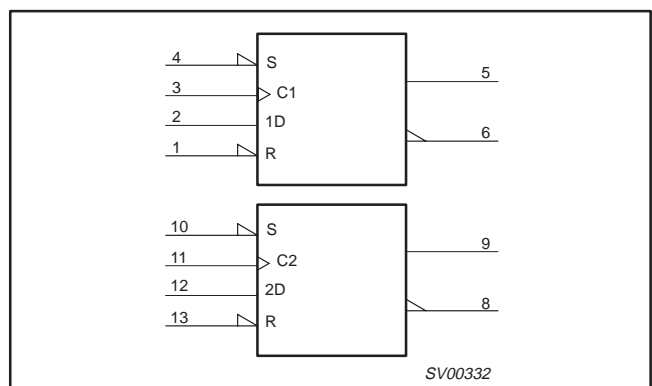


Dual D-type flip-flop with set and reset; positive-edge trigger

74LVC74A

PIN DESCRIPTION

| PIN NUMBER | SYMBOL | NAME AND FUNCTION |
|------------|--------------------------|--|
| 1, 13 | $1\bar{R}_D, 2\bar{R}_D$ | Asynchronous reset-direct input (active LOW) |
| 2, 12 | 1D, 2D | Data inputs |
| 3, 11 | 1CP, 2CP | Clock input (LOW-to-HIGH, edge triggered) |
| 4, 10 | $1\bar{S}_D, 2\bar{S}_D$ | Asynchronous set-direct input (active LOW) |
| 5, 9 | 1Q, 2Q | True flip-flop outputs |
| 6, 8 | $1\bar{Q}, 2\bar{Q}$ | Complement flip-flop outputs |
| 7 | GND | Ground (0 V) |
| 14 | V_{CC} | Positive supply voltage |

LOGIC SYMBOL

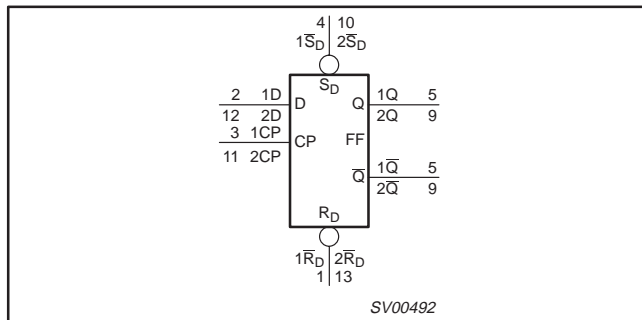

FUNCTION TABLE

| INPUTS | | | | OUTPUTS | |
|-------------|-------------|----|---|---------|-----------|
| \bar{S}_D | \bar{R}_D | CP | D | Q | \bar{Q} |
| L | H | X | X | H | L |
| H | L | X | X | L | H |
| L | L | X | X | H | H |

| INPUTS | | | | OUTPUTS | |
|-------------|-------------|----|---|-----------|-----------------|
| \bar{S}_D | \bar{R}_D | CP | D | Q_{n+1} | \bar{Q}_{n+1} |
| H | H | ↑ | L | L | H |
| H | H | ↑ | H | H | L |

NOTES:

H = HIGH voltage level


L = LOW voltage level

X = don't care

↑ = LOW-to-HIGH CP transition

Q_{n+1} = state after the next LOW-to-HIGH CP transition


FUNCTIONAL DIAGRAM

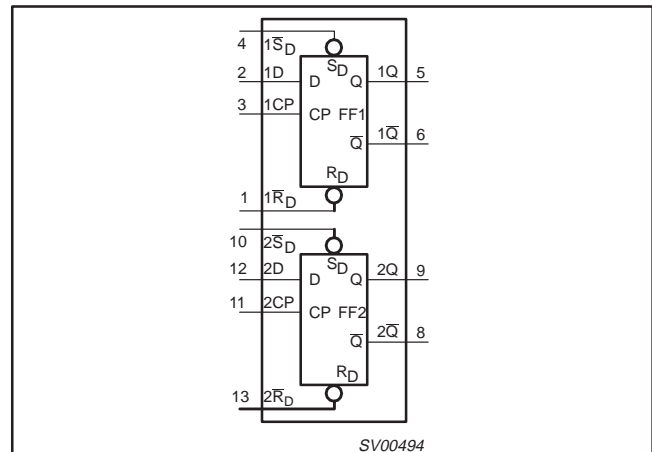

Dual D-type flip-flop with set and reset; positive-edge trigger

74LVC74A

LOGIC DIAGRAM (ONE FLIP-FLOP)

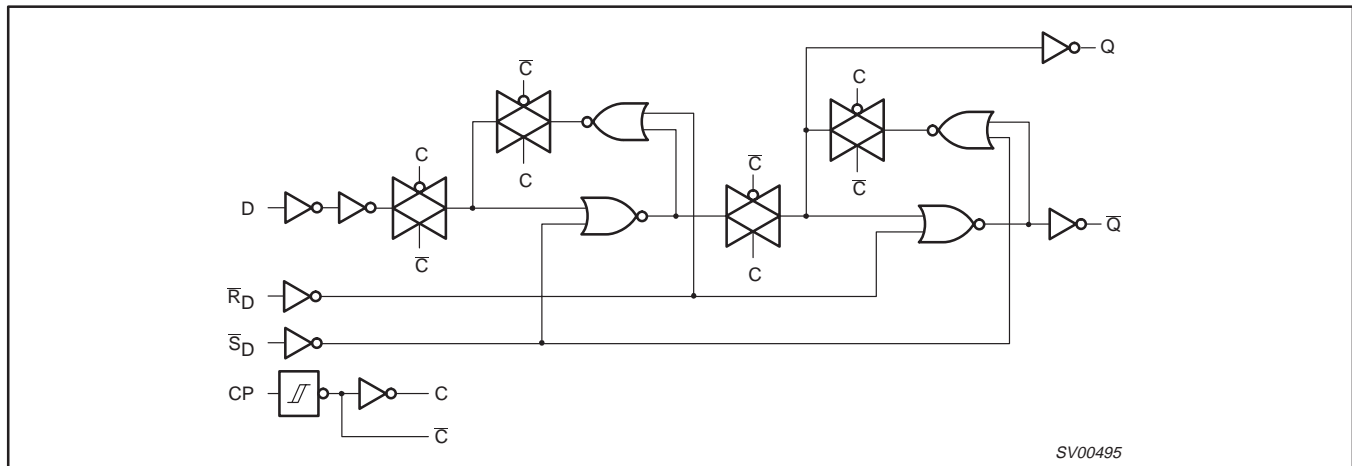

RECOMMENDED OPERATING CONDITIONS

| SYMBOL | PARAMETER | CONDITIONS | LIMITS | | UNIT |
|---------------------------------|--|--|--------|-----------------|------|
| | | | MIN | MAX | |
| V _{CC} | DC supply voltage (for max. speed performance) | | 2.7 | 3.6 | V |
| | DC supply voltage (for low-voltage applications) | | 1.2 | 3.6 | |
| V _I | DC input voltage range | | 0 | 5.5 | V |
| V _O | DC output voltage range | | 0 | V _{CC} | V |
| T _{amb} | Operating free-air temperature range | | -40 | +85 | °C |
| t _r , t _f | Input rise and fall times | V _{CC} = 1.2 to 2.7V V _{CC} = 2.7 to 3.6V | 0 | 20 10 | ns/V |

ABSOLUTE MAXIMUM RATINGS¹

In accordance with the Absolute Maximum Rating System (IEC 134)
 Voltages are referenced to GND (ground = 0V)

| SYMBOL | PARAMETER | CONDITIONS | RATING | UNIT |
|------------------------------------|--|--|-------------------------------|------|
| V _{CC} | DC supply voltage | | -0.5 to +6.5 | V |
| I _{IK} | DC input diode current | V _I < 0 | -50 | mA |
| V _I | DC input voltage | Note 2 | -0.5 to +5.5 | V |
| I _{OK} | DC output diode current | V _O > V _{CC} or V _O < 0 | ± 50 | mA |
| V _O | DC output voltage | Note 2 | -0.5 to V _{CC} + 0.5 | V |
| I _O | DC output source or sink current | V _O = 0 to V _{CC} | ± 50 | mA |
| I _{GND} , I _{CC} | DC V _{CC} or GND current | | ± 100 | mA |
| T _{stg} | Storage temperature range | | -65 to +150 | °C |
| P _{TOT} | Power dissipation per package - plastic mini-pack (SO) - plastic shrink mini-pack (SSOP and TSSOP) | above +70°C derate linearly with 8 mW/K above +60°C derate linearly with 5.5 mW/K | 500 500 | mW |

NOTES:

- Stresses beyond those listed may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

Dual D-type flip-flop with set and reset; positive-edge trigger

74LVC74A

DC ELECTRICAL CHARACTERISTICS

Over recommended operating conditions voltages are referenced to GND (ground = 0V)

| SYMBOL | PARAMETER | TEST CONDITIONS | LIMITS | | | UNIT |
|------------------|---|---|-----------------------|-----------------|------|------|
| | | | Temp = -40°C to +85°C | | | |
| | | | MIN | TYP1 | MAX | |
| V _{IH} | HIGH level Input voltage | V _{CC} = 1.2V | V _{CC} | | | V |
| | | V _{CC} = 2.7 to 3.6V | 2.0 | | | |
| V _{IL} | LOW level Input voltage | V _{CC} = 1.2V | | | GND | V |
| | | V _{CC} = 2.7 to 3.6V | | | 0.8 | |
| V _{OH} | HIGH level output voltage | V _{CC} = 2.7V; V _I = V _{IH} or V _{IL} ; I _O = -12mA | V _{CC} - 0.5 | | | V |
| | | V _{CC} = 3.0V; V _I = V _{IH} or V _{IL} ; I _O = -100µA | V _{CC} - 0.2 | V _{CC} | | |
| | | V _{CC} = 3.0V; V _I = V _{IH} or V _{IL} ; I _O = -18mA | V _{CC} - 0.6 | | | |
| | | V _{CC} = 3.0V; V _I = V _{IH} or V _{IL} ; I _O = -24mA | V _{CC} - 1.0 | | | |
| V _{OL} | LOW level output voltage | V _{CC} = 2.7V; V _I = V _{IH} or V _{IL} ; I _O = 12mA | | | 0.40 | V |
| | | V _{CC} = 3.0V; V _I = V _{IH} or V _{IL} ; I _O = 100µA | | GND | 0.20 | |
| | | V _{CC} = 3.0V; V _I = V _{IH} or V _{IL} ; I _O = 24mA | | | 0.55 | |
| I _I | Input leakage current | V _{CC} = 3.6V; V _I = 5.5V or GND | | ±0.1 | ±5 | µA |
| I _{CC} | Quiescent supply current | V _{CC} = 3.6V; V _I = V _{CC} or GND; I _O = 0 | | 0.1 | 10 | µA |
| ΔI _{CC} | Additional quiescent supply current per input pin | V _{CC} = 2.7V to 3.6V; V _I = V _{CC} - 0.6V; I _O = 0 | | 5 | 500 | µA |

NOTES:

1. All typical values are at V_{CC} = 3.3V and T_{amb} = 25°C.

AC CHARACTERISTICS

GND = 0 V; t_r = t_f ≤ 2.5 ns; C_L = 50 pF; R_L = 500Ω; T_{amb} = -40°C to +85°C

| SYMBOL | PARAMETER | WAVEFORM | LIMITS | | | | | UNIT |
|--|---|--------------|------------------------------|------------------|-----|------------------------|-----|------|
| | | | V _{CC} = 3.3V ±0.3V | | | V _{CC} = 2.7V | | |
| | | | MIN | TYP ¹ | MAX | MIN | MAX | |
| t _{PHL} / t _{PLH} | Propagation delay nCP to nQ, nQ̄ | Figures 1, 3 | 1.5 | 3.6 | 5.2 | - | 6.0 | ns |
| | Propagation delay nS _D to nQ, nQ̄ | Figures 2, 3 | 1.5 | 3.5 | 5.4 | - | 6.4 | ns |
| | Propagation delay nR _D to nQ, nQ̄ | Figures 2, 3 | 1.5 | 3.5 | 5.4 | - | 6.4 | ns |
| t _w | Clock pulse width HIGH or LOW | Figure 1 | 3.3 | 1.3 | - | - | - | ns |
| | Set or reset pulse width LOW | Figure 2 | 3.3 | 1.7 | - | - | - | |
| t _{rem} | Removal time set or reset | Figure 2 | 1 | -3 | - | - | - | ns |
| t _{su} | Set-up time nD to nCP | Figure 1 | 2.0 | 0.8 | - | - | - | ns |
| t _h | Hold time nD to nCP | Figure 1 | 1 | -0.7 | - | - | - | ns |
| f _{max} | Maximum clock pulse frequency | Figure 1 | 150 | 250 | - | - | - | MHz |

NOTE:

1. These typical values are at V_{CC} = 3.3V and T_{amb} = 25°C.

Dual D-type flip-flop with set and reset; positive-edge trigger

74LVC74A

AC WAVEFORMS

$V_M = 1.5\text{ V}$ at $V_{CC} \geq 2.7\text{ V}$
 $V_M = 0.5 \cdot V_{CC}$ at $V_{CC} < 2.7\text{ V}$
 V_{OL} and V_{OH} are the typical output voltage drop that occur with the output load.

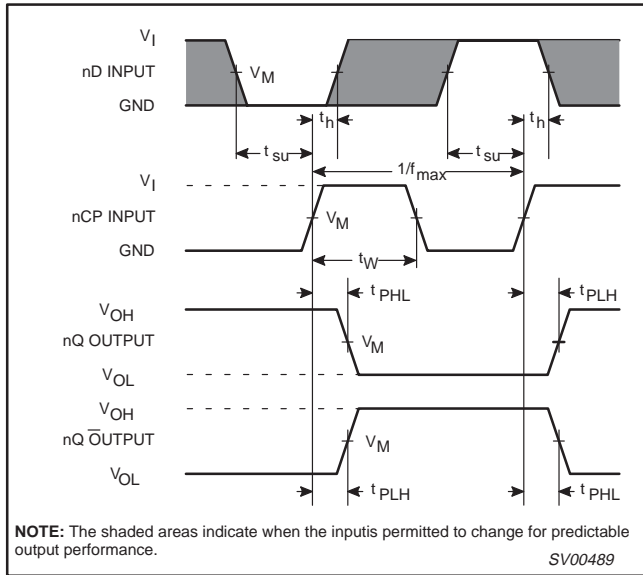


Figure 1. Clock (nCP) to output (nQ, nQ) propagation delays, clock pulse width, nD to nCP set-up times, the nCP to nD hold times, output transition times and maximum clock pulse frequency.

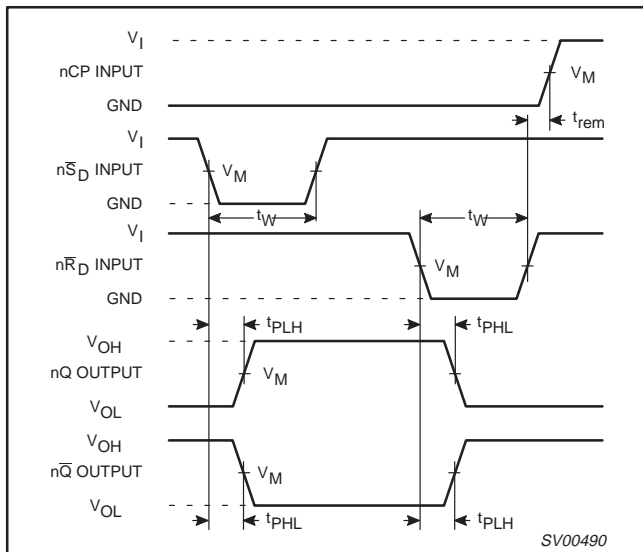


Figure 2. Set (nSD) and reset (nRD) input to output (nQ, nQ) propagation delays, the set and reset pulse widths and the nRD to nCP removal time.

TEST CIRCUIT

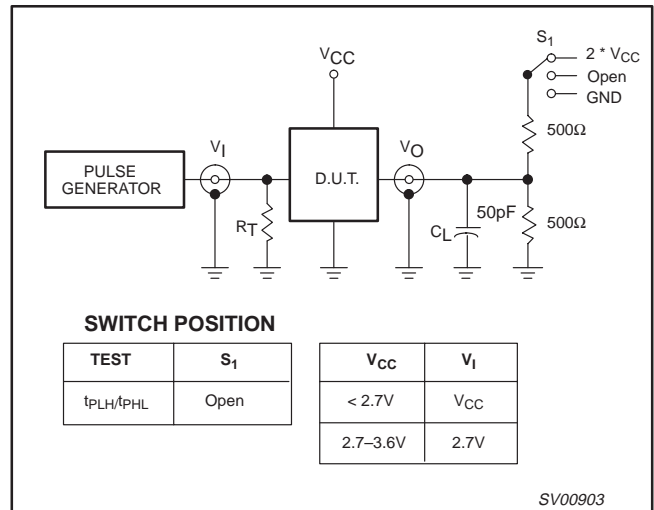



Figure 3. Load circuitry for switching times.

Dual D-type flip-flop with set and reset; positive-edge trigger

74LVC74A

SO14: plastic small outline package; 14 leads; body width 3.9 mm

SOT108-1

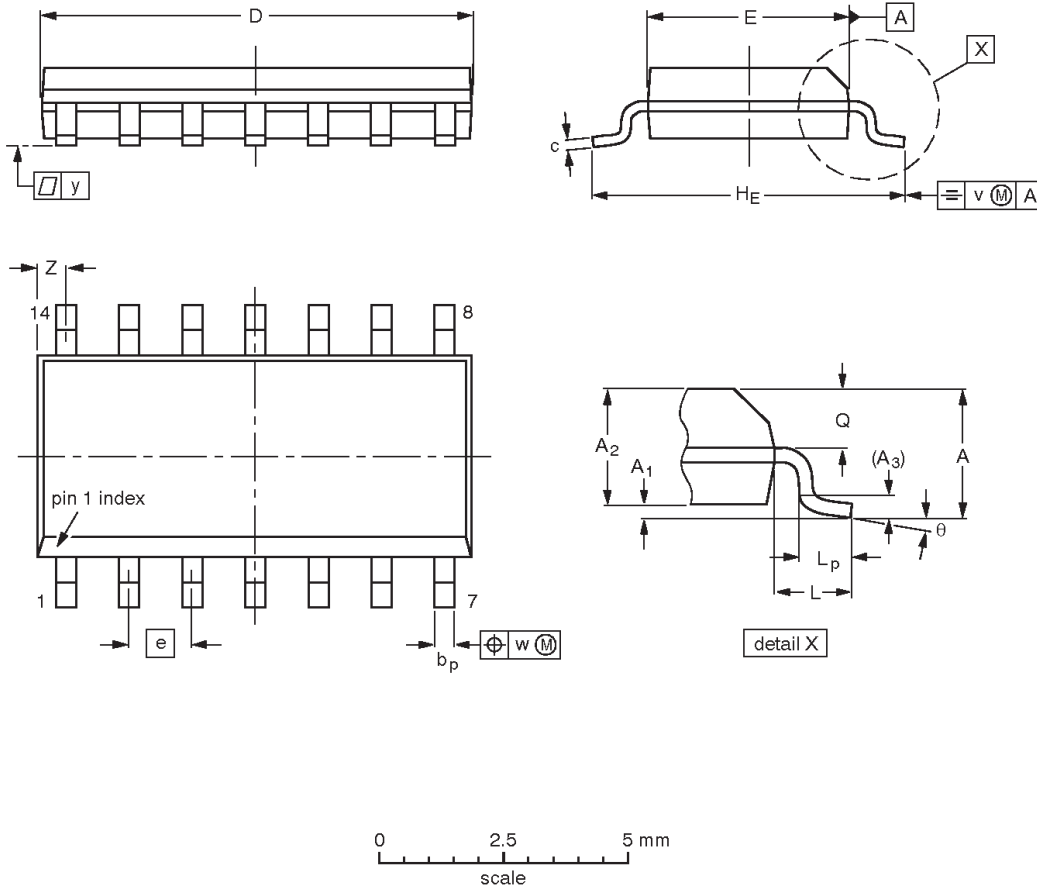

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

| UNIT | A max. | A ₁ | A ₂ | A ₃ | b _p | c | D ⁽¹⁾ | E ⁽¹⁾ | e | H _E | L | L _p | Q | v | w | y | z ⁽¹⁾ | θ |
|--------|--------|----------------|----------------|----------------|----------------|------------------|------------------|------------------|-------|----------------|-------|----------------|----------------|------|------|-------|------------------|----------|
| mm | 1.75 | 0.25 0.10 | 1.45 1.25 | 0.25 | 0.49 0.36 | 0.25 0.19 | 8.75 8.55 | 4.0 3.8 | 1.27 | 6.2 5.8 | 1.05 | 1.0 0.4 | 0.7 0.6 | 0.25 | 0.25 | 0.1 | 0.7 0.3 | 8° 0° |
| inches | 0.069 | 0.010 0.004 | 0.057 0.049 | 0.01 | 0.019 0.014 | 0.0100 0.0075 | 0.35 0.34 | 0.16 0.15 | 0.050 | 0.244 0.228 | 0.041 | 0.039 0.016 | 0.028 0.024 | 0.01 | 0.01 | 0.004 | 0.028 0.012 | |

Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.


| OUTLINE VERSION | REFERENCES | | | | EUROPEAN PROJECTION | ISSUE DATE |
|-----------------|------------|----------|------|--|---------------------|----------------------|
| | IEC | JEDEC | EIAJ | | | |
| SOT108-1 | 076E06S | MS-012AB | | | | 95-01-29 97-05-22 |

Dual D-type flip-flop with set and reset; positive-edge trigger

74LVC74A

SSOP14: plastic shrink small outline package; 14 leads; body width 5.3 mm

SOT337-1

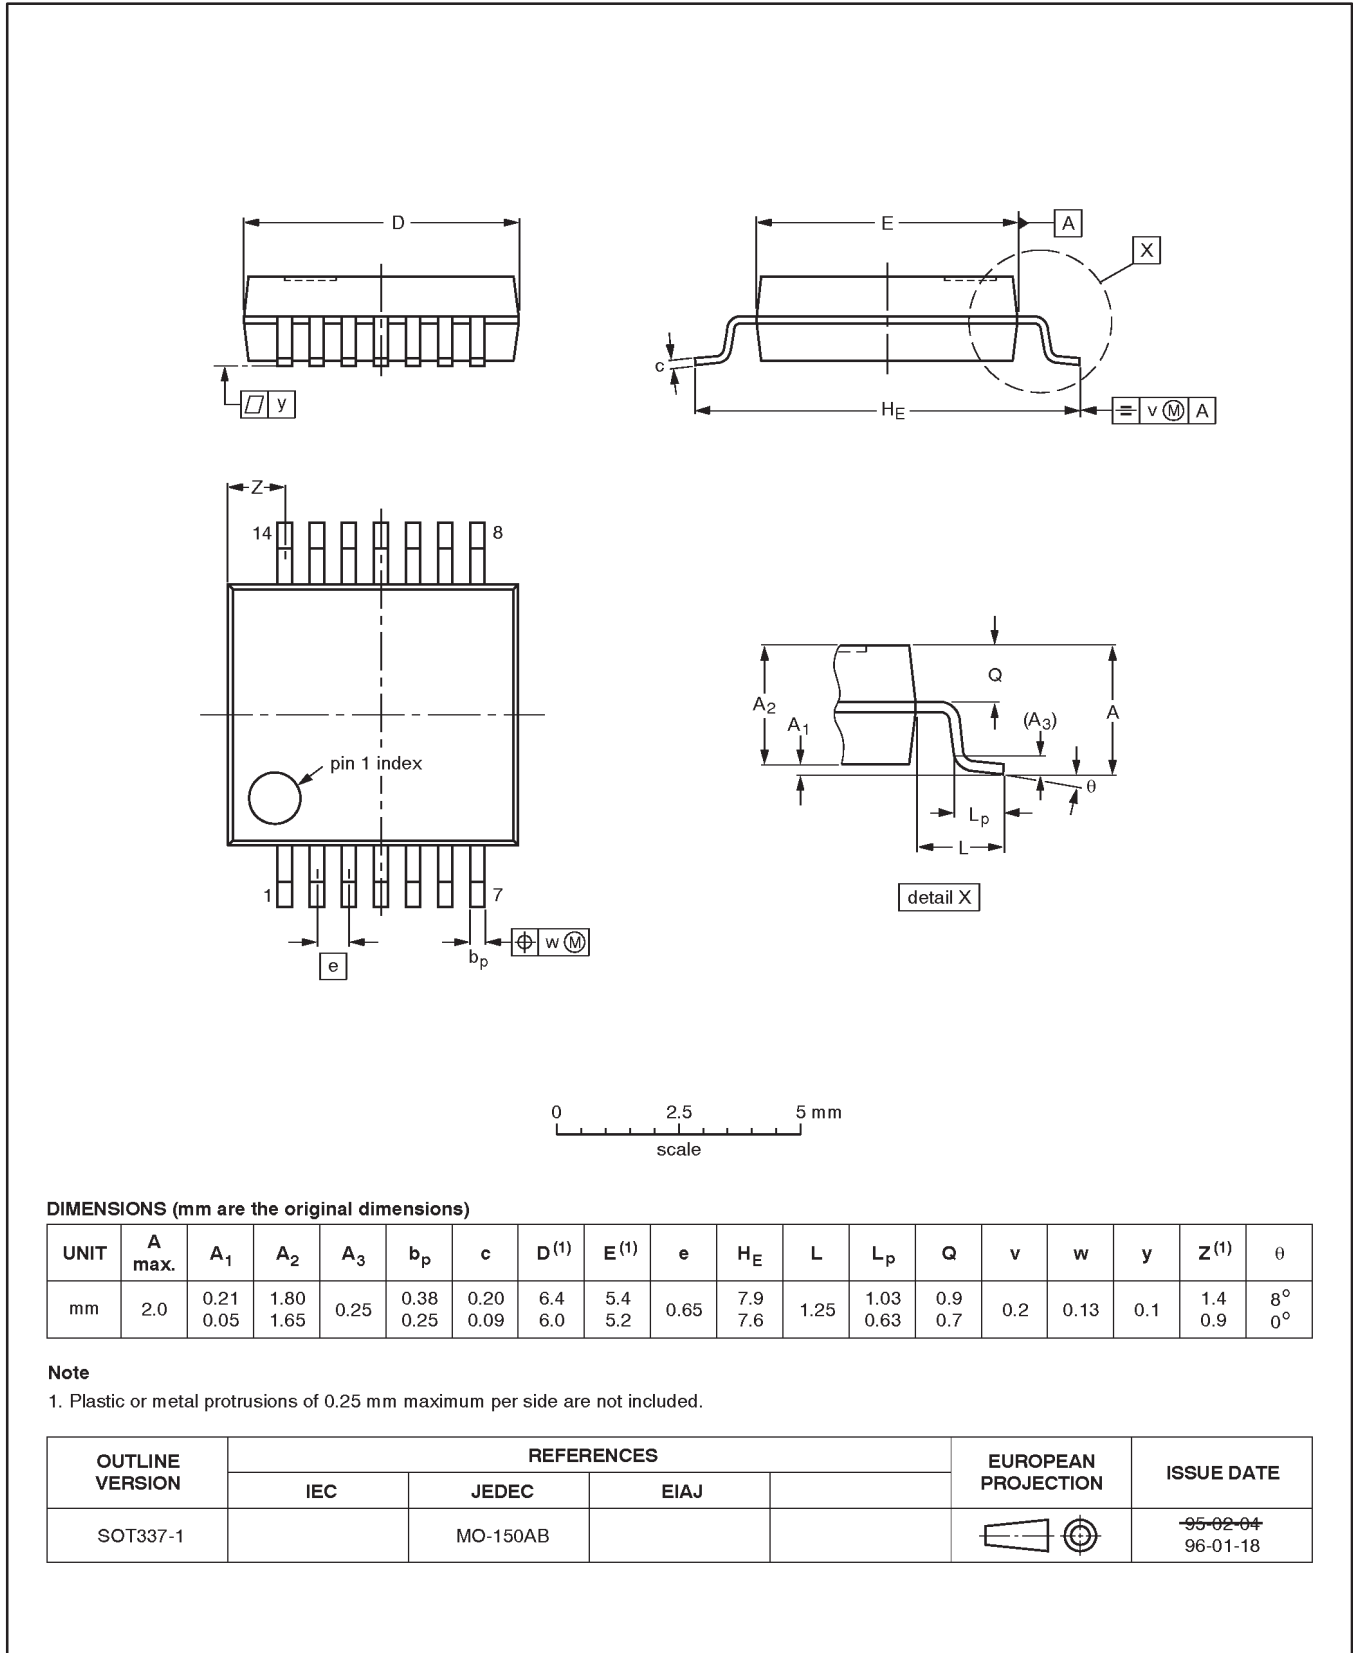

DIMENSIONS (mm are the original dimensions)

| UNIT | A max. | A ₁ | A ₂ | A ₃ | b _p | c | D ⁽¹⁾ | E ⁽¹⁾ | e | H _E | L | L _p | Q | v | w | y | Z ⁽¹⁾ | θ |
|------|--------|----------------|----------------|----------------|----------------|--------------|------------------|------------------|------|----------------|------|----------------|------------|-----|------|-----|------------------|----------|
| mm | 2.0 | 0.21 0.05 | 1.80 1.65 | 0.25 | 0.38 0.25 | 0.20 0.09 | 6.4 6.0 | 5.4 5.2 | 0.65 | 7.9 7.6 | 1.25 | 1.03 0.63 | 0.9 0.7 | 0.2 | 0.13 | 0.1 | 1.4 0.9 | 8° 0° |

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.



| OUTLINE VERSION | REFERENCES | | | | EUROPEAN PROJECTION | ISSUE DATE |
|-----------------|------------|----------|------|--|---------------------|---------------------------------|
| | IEC | JEDEC | EIAJ | | | |
| SOT337-1 | | MO-150AB | | | | 95-02-04 96-01-18 |

Dual D-type flip-flop with set and reset; positive-edge trigger

74LVC74A

TSSOP14: plastic thin shrink small outline package; 14 leads; body width 4.4 mm

SOT402-1

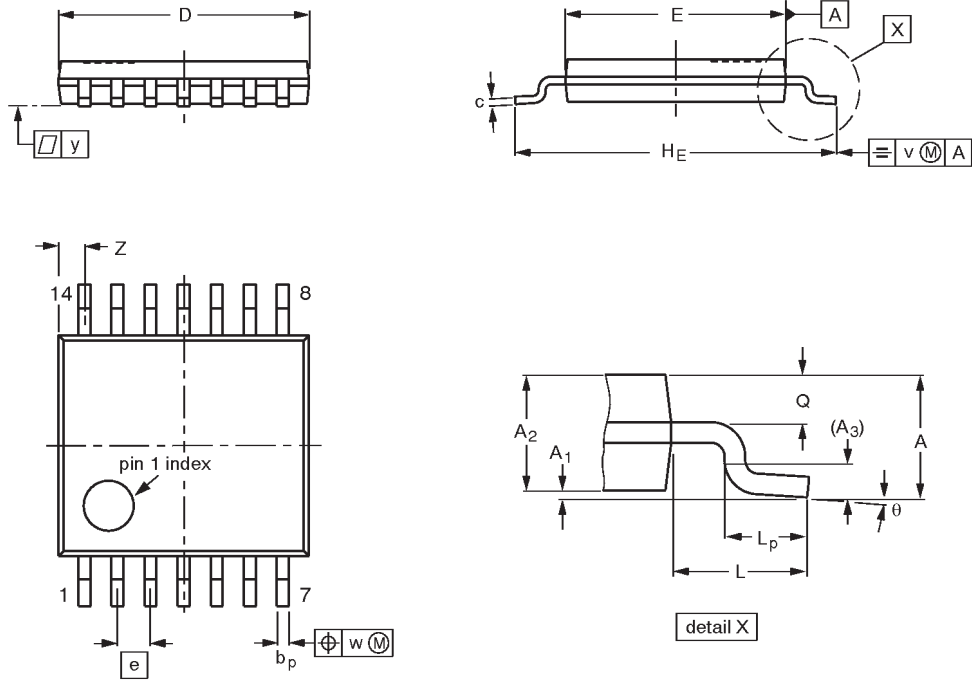

DIMENSIONS (mm are the original dimensions)

| UNIT | A max. | A ₁ | A ₂ | A ₃ | b _p | c | D ⁽¹⁾ | E ⁽²⁾ | e | H _E | L | L _p | Q | v | w | y | Z ⁽¹⁾ | θ |
|------|--------|----------------|----------------|----------------|----------------|------------|------------------|------------------|------|----------------|-----|----------------|------------|-----|------|-----|------------------|----------|
| mm | 1.10 | 0.15 0.05 | 0.95 0.80 | 0.25 | 0.30 0.19 | 0.2 0.1 | 5.1 4.9 | 4.5 4.3 | 0.65 | 6.6 6.2 | 1.0 | 0.75 0.50 | 0.4 0.3 | 0.2 | 0.13 | 0.1 | 0.72 0.38 | 8° 0° |

Notes

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

| OUTLINE VERSION | REFERENCES | | | | EUROPEAN PROJECTION | ISSUE DATE |
|-----------------|------------|--------|------|--|---------------------|------------------------|
| | IEC | JEDEC | EIAJ | | | |
| SOT402-1 | | MO-153 | | | | -94-07-12- 95-04-04 |

Dual D-type flip-flop with set and reset; positive-edge trigger

74LVC74A

Data sheet status

| Data sheet status | Product status | Definition [1] |
|---------------------------|----------------|--|
| Objective specification | Development | This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice. |
| Preliminary specification | Qualification | This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |
| Product specification | Production | This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |

[1] Please consult the most recently issued datasheet before initiating or completing a design.

Definitions

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Disclaimers

Life support — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors
811 East Arques Avenue
P.O. Box 3409
Sunnyvale, California 94088-3409
Telephone 800-234-7381

© Copyright Philips Electronics North America Corporation 1998
All rights reserved. Printed in U.S.A.

print code

Date of release: 06-96

Document order number:

9397-750-04487

Let's make things better.