
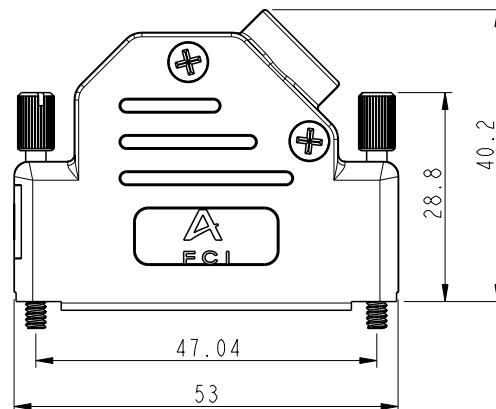


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de FCI. Droits de reproduction FCI.

A
FCI



All rights strictly reserved. Reproduction or issue in third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

SIZE	Part Num.	Threading
25	8655PHRA2501	UNC 4.40



NOTES:

Material: Polycarbonat (UL94V-0)
Cable strain relief: Steel fibre reinforced Polycarbonat (UL94V-0)
Temperature range: -40°C to 120°C
Cable diameter: 4,0 to 13,0 mm
Jackscrew: UNC 4.40 black
Packaging: Bulk, in box of 100 P/N
Covers screwing force (max): 100 Ncm
Jackscrew screwing force (max): 75 Ncm

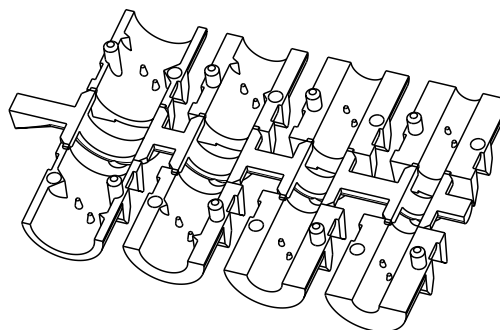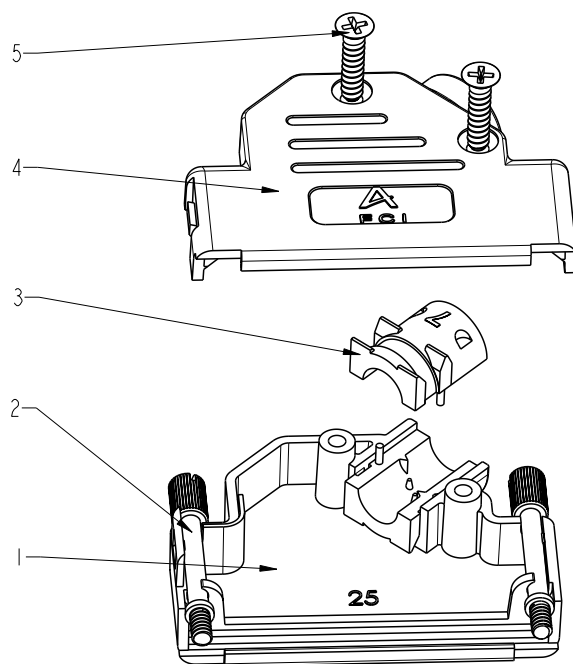

DESIGNATION	REP	09	15	25	37
COVER BOTTOM	1	1			
JACKSCREWS	2	1	2		
STRAIN RELIEF	3	2			
COVER TOP	4	1			
SCREWS POZIDRIVE	5	2			

litr	ecr no	dr	date
A	ES4045	SBA	84/27/04
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-


A FCI www.fciconnect.com			surface - ☒ ISO 1302		tolerance ISO 406 ISO 1101		projection 		mm 				
Dr	BART.S	05.04.04	Product family			D-SUB	size	A3	Scale	3:2			
Eng	LENOIR.M	05.04.04	Spec ref			-	ECN						
Chr	LEGARE.P	05.04.04	Material			SEE NOTES							
Appr	LEGARE.P	05.04.04											
title							D-SUB PLASTIC SHELLS		dwg no		10039957C	Rev	A
ANGLED													
catalog no									CUSTOMER COPY		sheet 1 of 3		

Tous droits strictement réservés. Reproduction ou communication sans autorisation écrite du propriétaire. Propriété de FCI. Droits de reproduction FCI.


A
FCI

All rights strictly reserved. Reproduction or issue in third parties in any form whatsoever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.


SIZE	Part Num.	Threading
9	8655PHRA0901	UNC 4.40

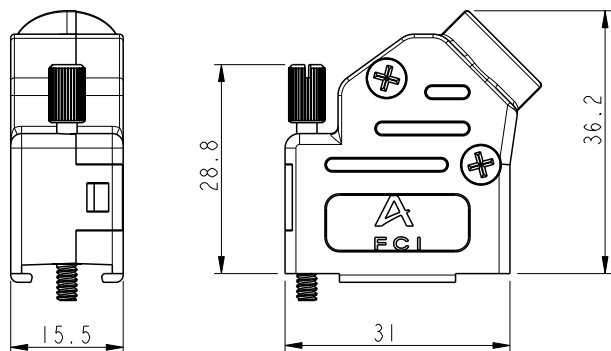

SIZE	Part Num.	Threading
37	8655PHRA3701	UNC 4.40

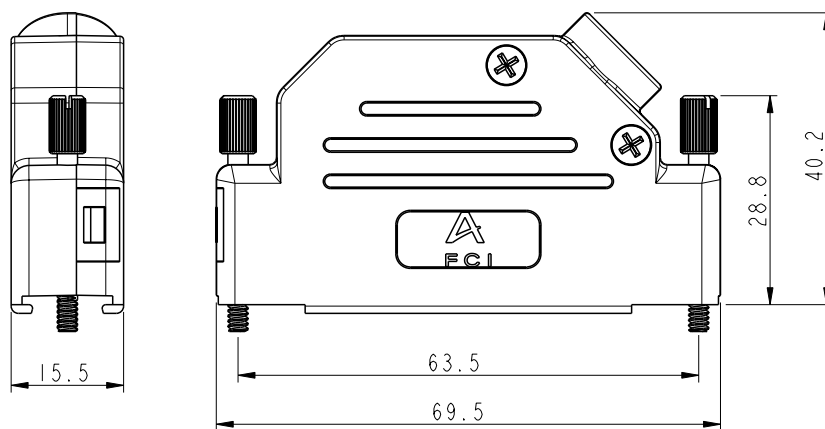


SIZE	Part Num.	Threading
15	8655PHRA1501	UNC 4.40

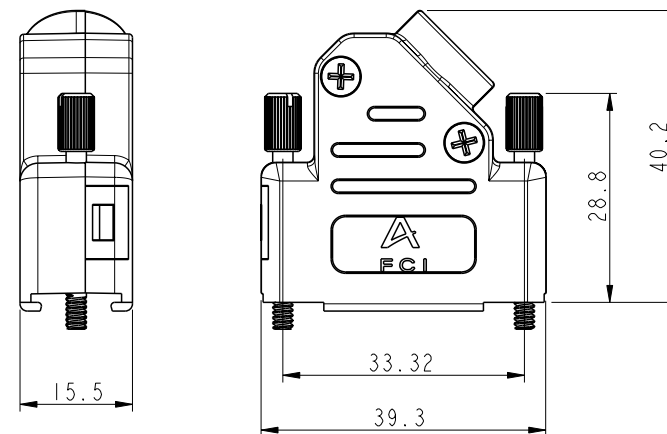


A FCI www.fciconnect.com			surface - ✓ ISO 1302		tolerance ISO 406 ISO 1101		projection 		mm 	
Dr	BART.S	05.04.04	Product family			D-SUB	size	A3	Scale	
Eng	LENOIR.M	05.04.04	Spec ref			-	3:2			
Chr	LEGARE.P	05.04.04	Material			SEE NOTES	ECN	-		
Appr	LEGARE.P	05.04.04								
title						D-SUB PLASTIC SHELLS		dwg no		
						ANGLED		10039957C		
								Rev.		
								A		
catalog no						-		CUSTOMER COPY		
								sheet 2 of 3		

CABLING INSTRUCTIONS


1- Use two halves of strain relief different sizes can be mixed (Ø4,5,7 or 9)

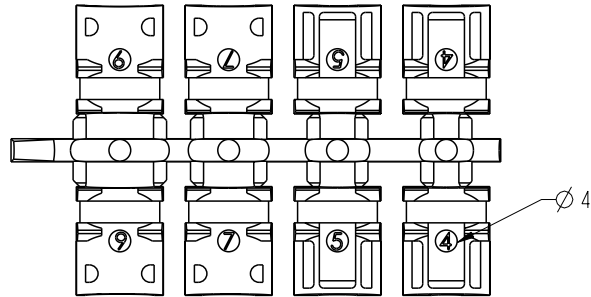


3- Mount connector and cable into the backshell

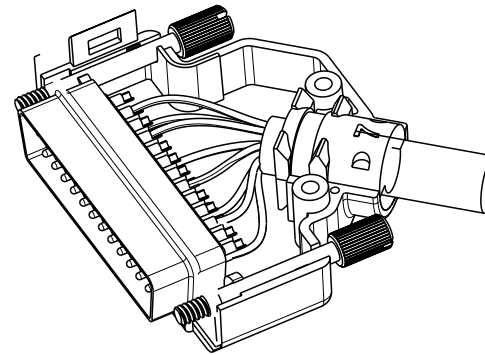

4- Assemble the other half screwing force: 100 Ncm

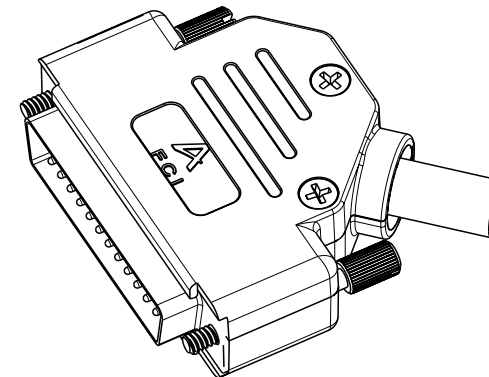

2- Attach the strain relief around the cable

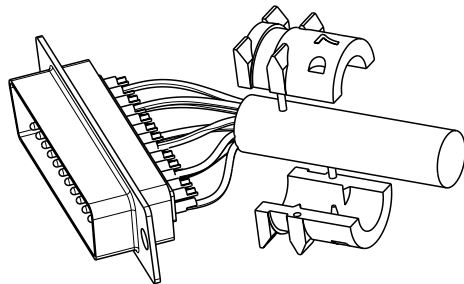

A FCI www.fciconnect.com				surface - ☒ tolerance ISO 1302 ISO 406 ISO 1101	projection mm
Dr	BART.S	05.04.04	Product family	D-SUB	size A3
Eng	LENOIR.M	05.04.04	Spec ref	-	Scale 3:2
Chr	LEGARE.P	05.04.04	Material	SEE NOTES	ECN -
Appr	LEGARE.P	05.04.04			
title D-SUB PLASTIC SHELLS ANGLED				dwg no 10039957C	Rev. A
catalog no -				CUSTOMER COPY sheet 3 of 3	

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de A FCI. Droits de reproduction FCI.

A FCI

All rights strictly reserved. Reproduction or issue in third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.