

C/A-302X, C/A-362X DUAL DIGITS DISPLAY



| Shape | Part No. | | Chip | | Wave Length λ_p (nm) | Electro-Optical Characteristics | | | Fig. No. |
|---|----------------|--------------|--------------|---------------|---------------------------------|---------------------------------|------|-------------|----------|
| | Common Cathode | Common Anode | Raw Material | Emitted Color | | Vf(V)20mA | | Iv(ucd)10mA | |
| | | | | | | Typ. | Max. | Typ. | |
|  | C-302H | A-302H | GaP | Red | 700 | 2.1 | 2.8 | 550 | D25 |
| | C-302E | A-302E | GaAsP/GaP | Hi.effi Red | 635 | 2.0 | 2.8 | 1800 | |
| | C-302G | A-302G | GaP | Green | 565 | 2.1 | 2.8 | 1600 | |
| | C-302Y | A-302Y | GaAsP/GaP | Yellow | 585 | 2.1 | 2.8 | 1500 | |
| | C-302SR | A-302SR | GaAlAs | Super Red | 660 | 1.8 | 2.4 | 5000 | |
|  | C-362H | A-362H | GaP | Red | 700 | 2.1 | 2.8 | 550 | D26 |
| | C-362E | A-362E | GaAsP/GaP | Hi.effi Red | 635 | 2.0 | 2.8 | 1800 | |
| | C-362G | A-362G | GaP | Green | 565 | 2.1 | 2.8 | 1600 | |
| | C-362Y | A-362Y | GaAsP/GaP | Yellow | 585 | 2.1 | 2.8 | 1500 | |
| | C-362SR | A-362SR | GaAlAs | Super Red | 660 | 1.8 | 2.4 | 5000 | |

Fig.D25


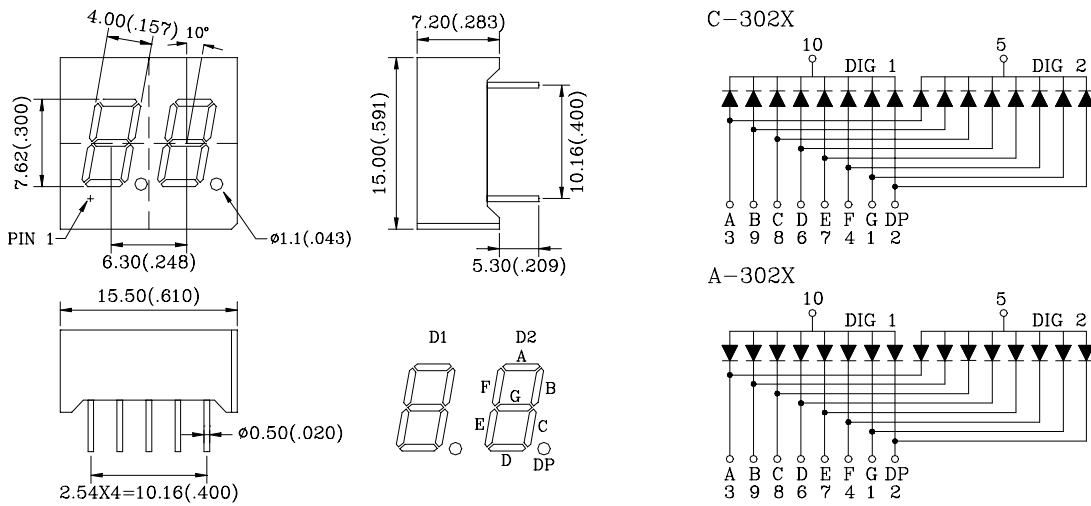


Fig.D26

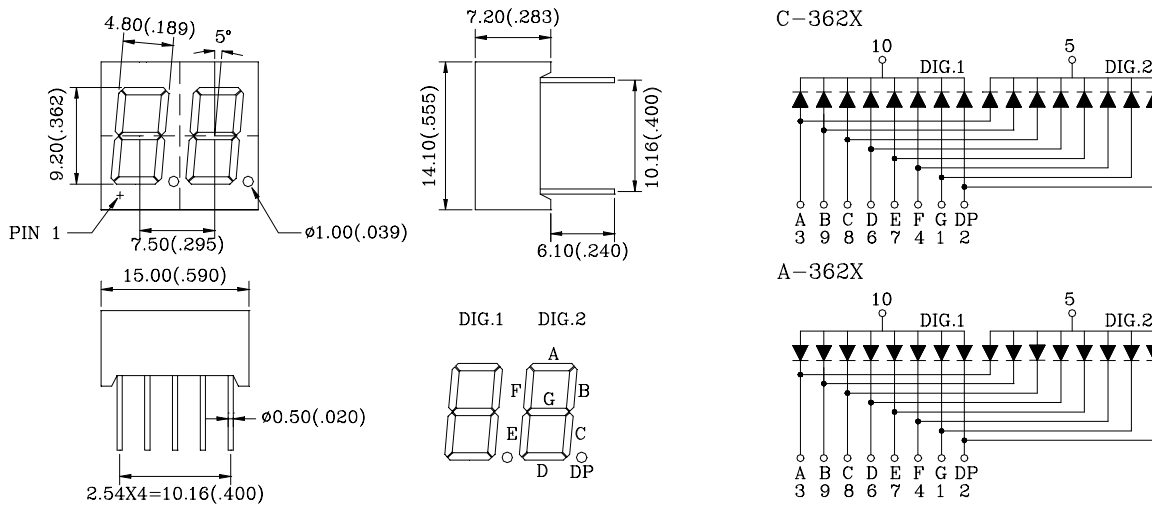

1.All dimension are in millimeters (inches).
 2.Tolerance is ± 0.25 mm (0.01") unless otherwise specified.