

N-Channel Enhancement Mode Power MOSFET

■ Features

- Low Gate Charge
- Simple Drive Requirement
- Fast Switching
- Pb Free Plating Product


■ General Description

The TO-252 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

■ Product Summary

| BV _{DSS} (V) | R _{DS(ON)} (mΩ) | I _D (A) |
|-----------------------|--------------------------|--------------------|
| 25 | 9 | 66 |


■ Pin Assignments

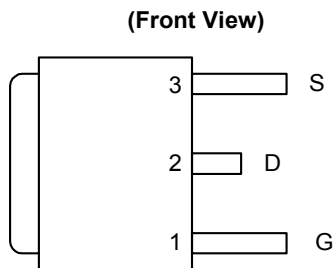


■ Pin Descriptions

| Pin Name | Description |
|----------|-------------|
| S | Source |
| G | Gate |
| D | Drain |

■ Ordering information

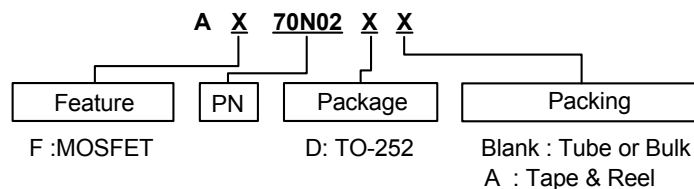

■ Block Diagram

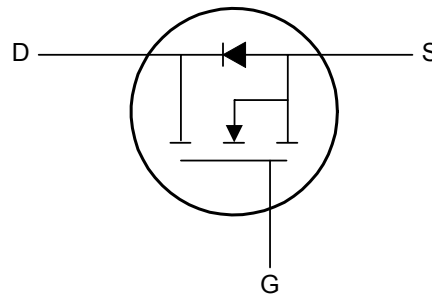



N-Channel Enhancement Mode Power MOSFET

■ Absolute Maximum Ratings

| Symbol | Parameter | Rating | Units |
|-----------|--|-------------------|------------|
| V_{DS} | Drain-Source Voltage | 25 | V |
| V_{GS} | Gate-Source Voltage | ± 20 | V |
| I_D | Continuous Drain Current, $V_{GS}=10V$ | $T_C=25^\circ C$ | 66 |
| | | $T_C=100^\circ C$ | 42 |
| I_{DM} | Pulsed Drain Current (Note 1) | 210 | A |
| P_D | Total Power Dissipation | $T_C=25^\circ C$ | 66 |
| | Linear Derating Factor | | 0.53 |
| T_{STG} | Storage Temperature Range | -55 to 150 | $^\circ C$ |
| T_J | Operating Junction Temperature Range | -55 to 150 | $^\circ C$ |

■ Thermal Data

| Symbol | Parameter | Maximum | Units |
|-----------------|--------------------------------------|---------|-------|
| $R_{\theta JC}$ | Thermal Resistance Junction-Case | Max. | 1.9 |
| $R_{\theta JA}$ | Thermal Resistance Junction- Ambient | Max. | 110 |

■ Electrical Characteristics ($T_J=25^\circ C$ unless otherwise noted)

| Symbol | Parameter | Test Conditions | Limits | | | Unit |
|------------------------------|---|--|--------|-------|-----------|--------------|
| | | | Min. | Typ. | Max. | |
| BV_{DSS} | Drain-Source Breakdown Voltage | $V_{GS}=0V, I_D=250\mu A$ | 25 | - | - | V |
| $\Delta BV_{DSS}/\Delta T_J$ | Breakdown Voltage Temperature Coefficient | Reference to $25^\circ C$, $I_D=1mA$ | - | 0.037 | - | $V/^\circ C$ |
| $R_{DS(ON)}$ | Static Drain-Source On-Resistance | $V_{GS}=10V, I_D=33A$ | - | - | 9 | m Ω |
| | | $V_{GS}=4.5V, I_D=20A$ | - | - | 18 | |
| $V_{GS(th)}$ | Gate Threshold Voltage | $V_{DS}=V_{GS}, I_D=250\mu A$ | 1 | - | 3 | V |
| g_{fs} | Forward Transconductance | $V_{DS}=10V, I_D=33A$ | - | 28 | - | S |
| I_{DSS} | Drain-Source Leakage Current($T_J=25^\circ C$) | $V_{DS}=25V, V_{GS}=0V$ | - | - | 1 | uA |
| | Drain-Source Leakage Current($T_J=150^\circ C$) | $V_{DS}=20V, V_{GS}=0V$ | - | - | 25 | |
| I_{GSS} | Gate Source Leakage | $V_{GS}=\pm 20V$ | - | - | ± 100 | nA |
| Q_g | Total Gate Charge (Note 2) | $I_D=33A$ | - | 23 | - | nC |
| Q_{gs} | Gate-Source Charge | $V_{DS}=20V$ | - | 3 | - | |
| Q_{gd} | Gate-Drain ("Miller") Charge | $V_{GS}=5V$ | - | 17 | - | |
| $t_{d(on)}$ | Turn-On Delay Time (Note 2) | $V_{DS}=15V$ $I_D=33A$ $R_G=3.3\Omega, V_{GS}=10V$ $R_D=0.45\Omega$ | - | 8.8 | - | nS |
| t_r | Rise Time | | - | 95 | - | |
| $t_{d(off)}$ | Turn-Off Delay Time | | - | 24 | - | |
| t_f | Fall-Time | | - | 14 | - | |
| C_{iss} | Input Capacitance | $V_{GS}=0V$ | - | 790 | - | pF |
| C_{oss} | Output Capacitance | $V_{DS}=25V,$ $f=1.0MHz$ | - | 475 | - | |
| C_{rss} | Reverse Transfer Capacitance | | - | 195 | - | |

■ Source-Drain Diode

| Sym. | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|----------|---|---|------|------|------|------|
| I_S | Continuous Source Current (Body Diode) | $V_D=V_G=0V, V_S=1.26V$ | - | - | 66 | A |
| I_{SM} | Pulsed Source Current (Body Diode) (Note 1) | | - | - | 210 | A |
| V_{SD} | Forward On Voltage (Note 2) | $T_J=25^\circ C, I_S=66A,$ $V_{GS}=0V$ | - | - | 1.26 | V |

N-Channel Enhancement Mode Power MOSFET

Drain-Source Avalanche Ratings

| Sym. | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|----------|--|--|------|------|------|------|
| E_{AS} | Single Pulse Avalanche Energy (Note 2) | $V_{DD}=25V, I_D=35A,$ $L=100\mu H, V_{GS}=10V$ | - | - | 61 | mJ |
| I_{AR} | Avalanche Current | | - | - | 35 | A |

Note 1: Pulse width limited by safe operating area.

Note 2: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

Typical Performance Characteristics

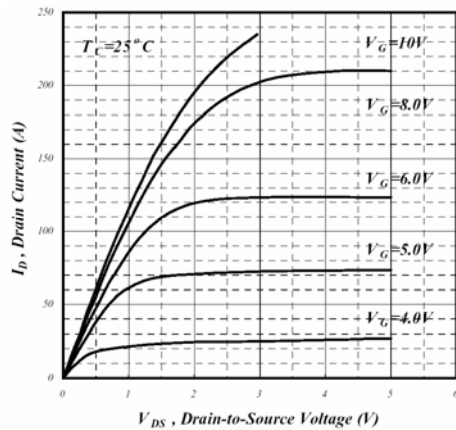


Fig 1. Typical Output Characteristics

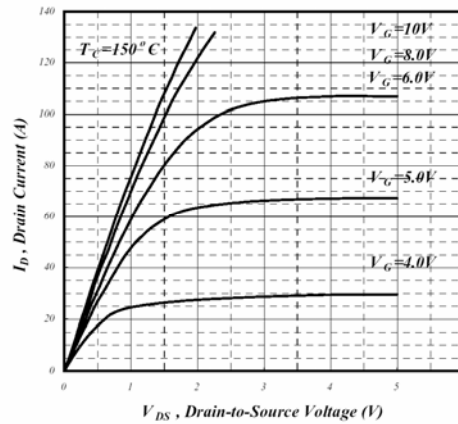


Fig 2. Typical Output Characteristics

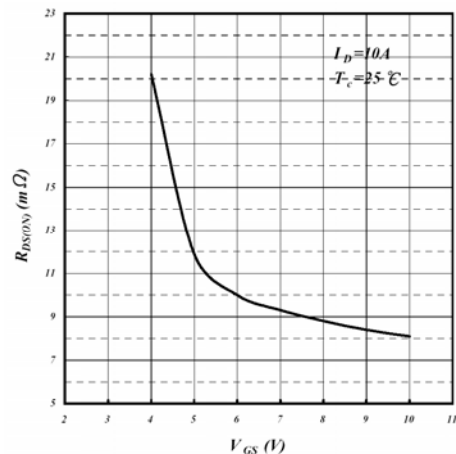


Fig 3. On-Resistance v.s. Gate Voltage

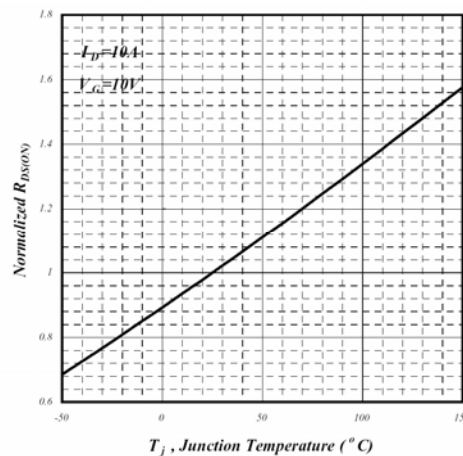


Fig 4. Normalized On-Resistance v.s. Junction Temperature

N-Channel Enhancement Mode Power MOSFET

■ Typical Performance Characteristics (Continued)

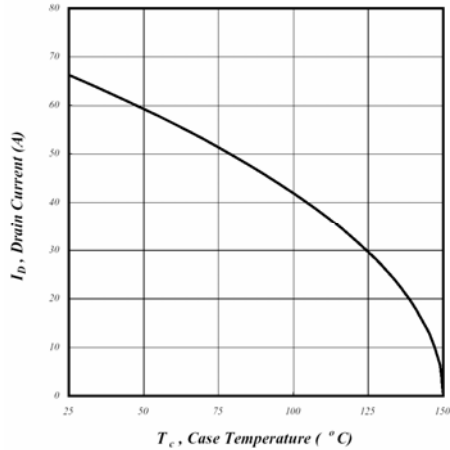


Fig 5. Maximum Drain Current v.s. Case Temperature

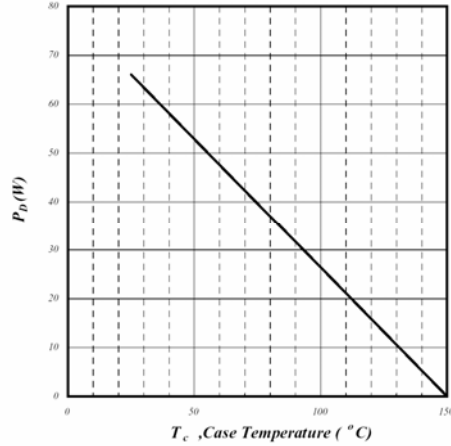


Fig 6. Typical Power Dissipation

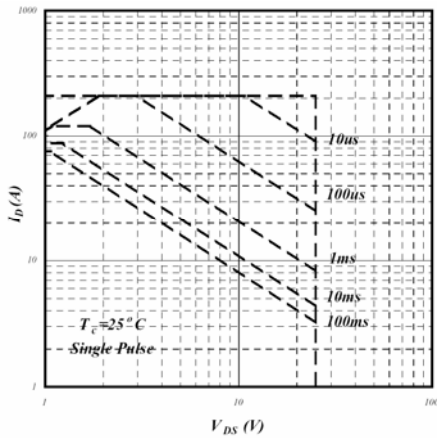


Fig 7. Maximum Safe Operating Area

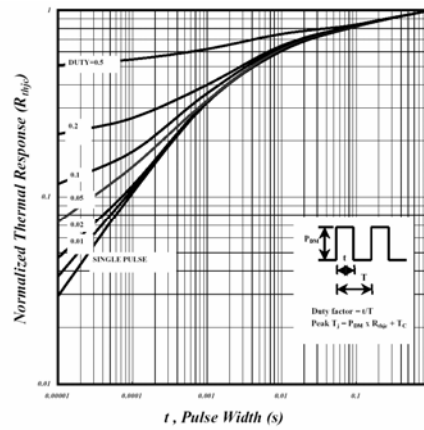


Fig 8. Effective Transient Thermal Impedance

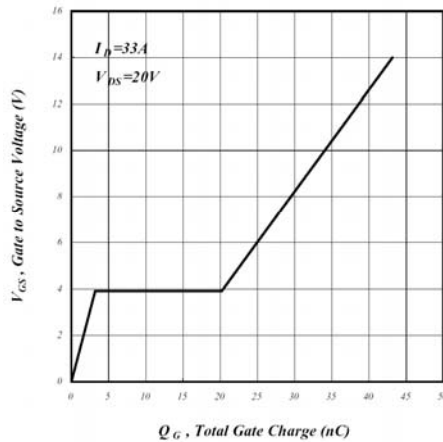


Fig 9. Gate Charge Characteristics

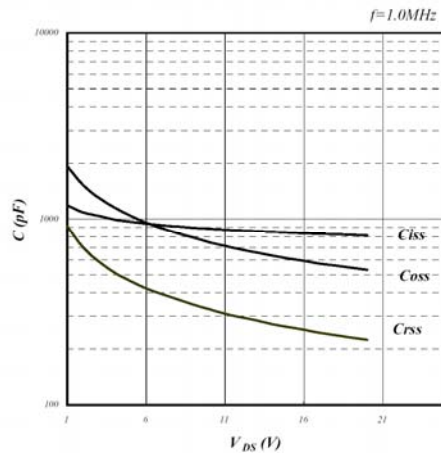


Fig 10. Typical Capacitance Characteristics

N-Channel Enhancement Mode Power MOSFET

■ Typical Performance Characteristics (Continued)

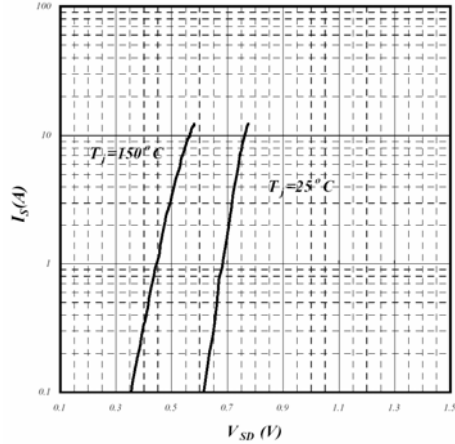


Fig 11. Forward Characteristic of Reverse Diode

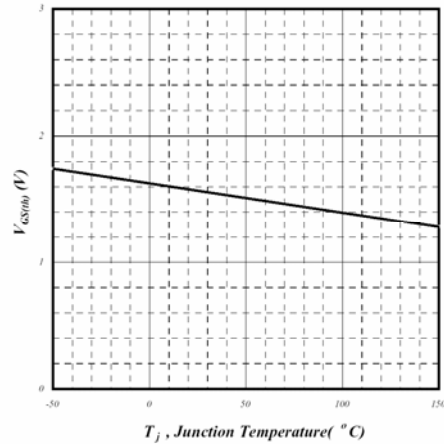


Fig 12. Gate Threshold Voltage v.s. Junction Temperature

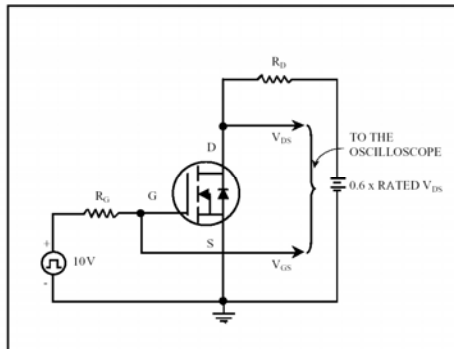


Fig 13. Switching Time Circuit

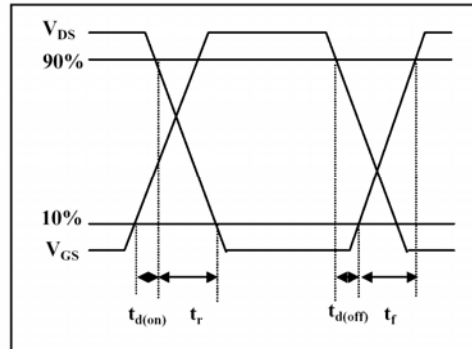


Fig 14. Switching Time Waveform

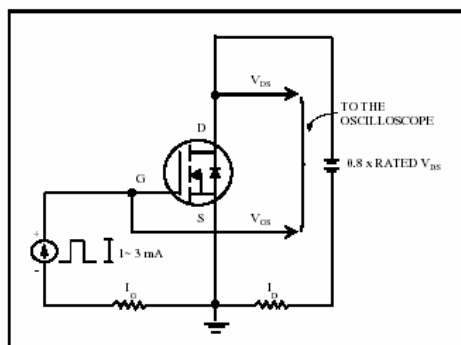


Fig 15. Gate Charge Circuit


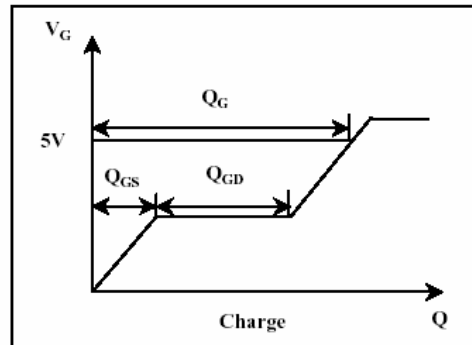


Fig 16. Gate Charge Waveform

N-Channel Enhancement Mode Power MOSFET


■ Marking Information

TO-252

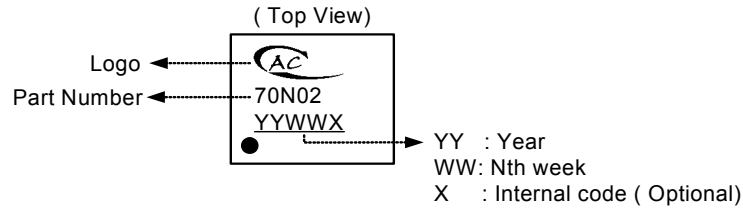

■ Package Information

Package Type: TO-252

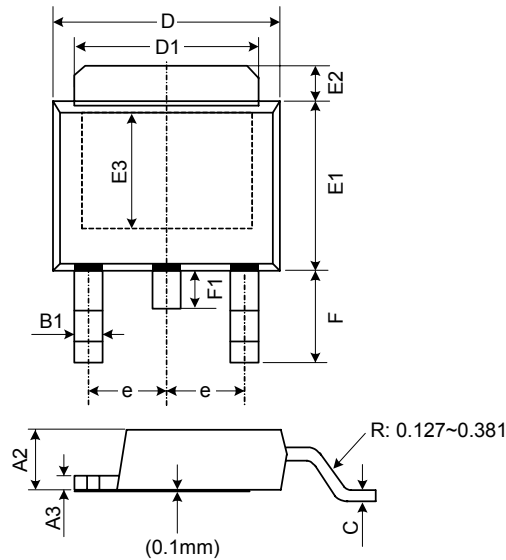

1. All Dimensions Are in Millimeters.
2. Dimension Does Not Include Mold Protrusions.

| Symbol | Dimensions In Millimeters | | |
|--------|---------------------------|------|------|
| | Min. | Nom. | Max. |
| A2 | 1.80 | 2.30 | 2.80 |
| A3 | 0.40 | 0.50 | 0.60 |
| B1 | 0.40 | 0.70 | 1.00 |
| D | 6.00 | 6.50 | 7.00 |
| D1 | 4.80 | 5.35 | 5.90 |
| F | 2.20 | 2.63 | 3.05 |
| F1 | 0.50 | 0.85 | 1.20 |
| E1 | 5.10 | 5.70 | 6.30 |
| E2 | 0.50 | 1.10 | 1.70 |
| E3 | 3.50 | 4.00 | 4.50 |
| e | - | 2.30 | - |
| C | 0.35 | 0.50 | 0.65 |