

■ General Description

The AME7720 / 7721 is switched-capacitor voltage doublers that delivers a regulated output. No external inductor is required for operation. Using three small capacitors, the AME7720 / 7721 can deliver up to 60mA to the voltage regulated output. The AME7720 / 7721 features very low output ripple and high efficiency over a large portion of its load range making this device ideal for battery-powered applications. Furthermore, the combination of few external components and small package size keeps the total converter board area to a minimum in space restricted applications.

The AME7720 / 7721 contains a thermal management circuit to protect the device under continuous output short circuit conditions.

The AME7720 / 7721 is available in SOT-25 / SOT-26 package and is rated from -40°C to 85°C.



■ Features

- Input Voltage Range:
 - 5V Version: 2.7V to 5.5V
 - 3.3V Version: 1.8V to 5.5V
- Accurate to with $\pm 5\%$
- Output Current:
 - 5V Version: 60mA with $V_{IN} \geq 3.0V$
 - 3.3V Version: 60mA with $V_{IN} \geq 2.2V$
- 1MHz Switching Frequency
- Shutdown Mode < 1 μ A (AME7720)
- Short Circuit Protection: Typ. 80mA
- Over Temperature Protection
- All AME's Lead Free Product Meet RoHS Standards

■ Applications

- Cellular Phone
- Digital Camera
- PDAs LCD display
- LED/Display Back Light Driver
- Smart Card Reader
- SIM Card Supply
- PCMCIA Card
- LCD Display

■ Functional Block Diagram

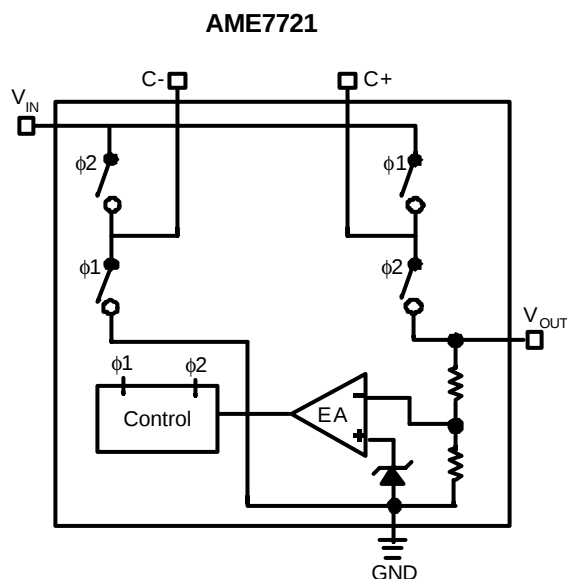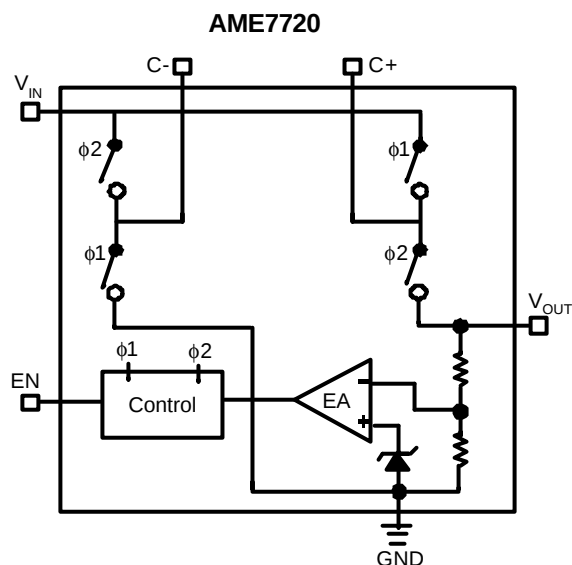





AME, Inc.


AME7720 / 7721

Step-Up/Step-Down
60mA Regulated Charge Pump

■ Typical Application

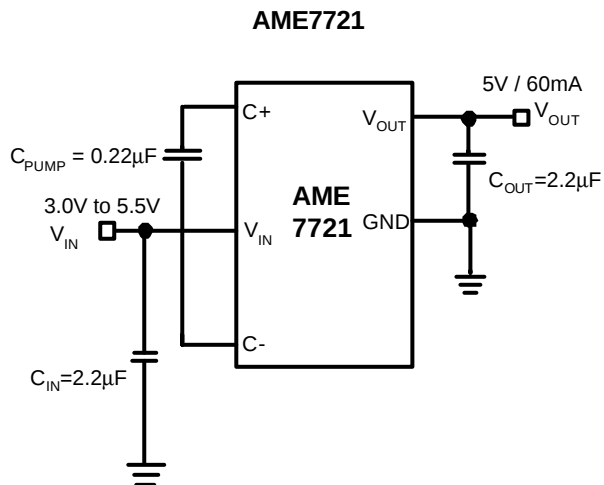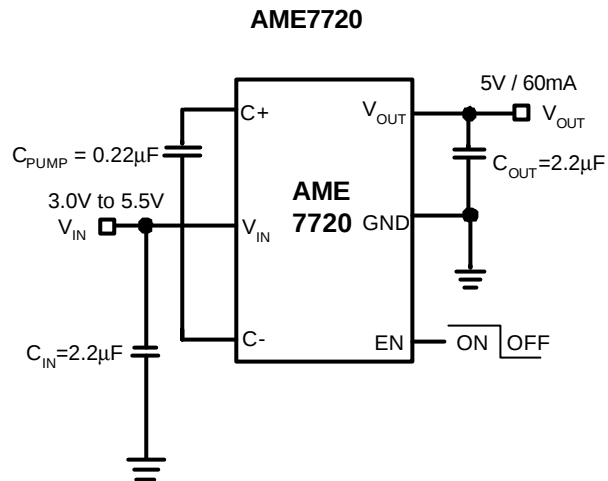


■ Pin Configuration


AME7720BEEY

1. V_{OUT}
2. GND
3. C-
4. V_{IN}
5. C+
6. EN

*** Die Attach:**
Conductive Epoxy


AME7721BEEV

1. V_{OUT}
2. GND
3. C-
4. V_{IN}
5. C+

*** Die Attach:**
Conductive Epoxy

■ Pin Description

Pin Number		Pin Name	Pin Description
AME7720	AME7721		
1	1	V_{OUT}	Regulator output pin. V_{OUT} should be bypassed with a 2.2 μ F low ESR ceramic capacitor.
2	2	GND	Ground pin connection.
3	3	C-	Pump capacitor negative terminal.
4	4	V_{IN}	Input supply pin. V_{IN} should be bypassed with a 2.2 μ F low ESR ceramic capacitor.
5	5	C+	Pump capacitor positive terminal.
6	N/A	EN	Shutdown input. Active Low disable the regulator.



AME, Inc.


AME7720 / 7721

Step-Up/Step-Down
60mA Regulated Charge Pump

■ Ordering Information

AME7720/7721

X X X X XXX X

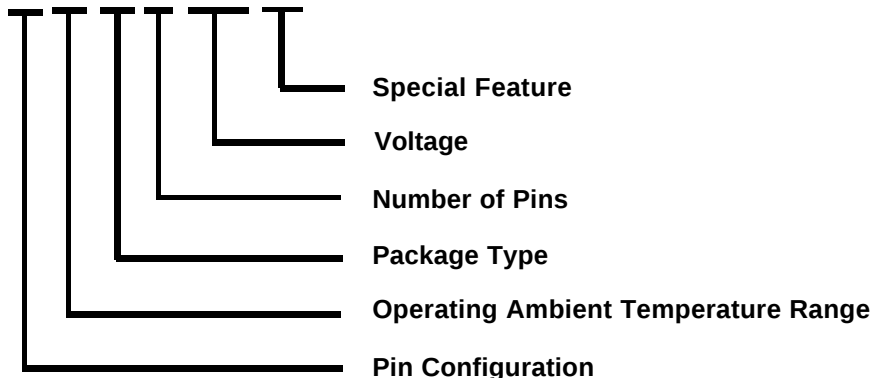

Pin Configuration	Operating Ambient Temperature Range	Package Type	Number of Pins	Voltage	Special Feature
AME7720 B 1. V _{OUT} (SOT-26) 2. GND 3. C- 4. V _{IN} 5. C+ 6. EN AME7721 B 1. V _{OUT} (SOT-25) 2. GND 3. C- 4. V _{IN} 5. C+	E: -40°C to 85°C	E: SOT-2X	V: 5 Y: 6	500: V=5V	Y: Lead free & Low profile Z: Lead free

■ Ordering Information

Part Number	Marking*	Output Voltage	Package	Operating Ambient Temperature Range
AME7720BEEY500Z	BECww	5V	SOT-26	- 40°C to + 85°C
AME7720BEEY500Y	BECww	5V	TSOT-26	- 40°C to + 85°C
AME7721BEEV500Z	BEGww	5V	SOT-25	- 40°C to + 85°C
AME7721BEEV500Y	BEGww	5V	TSOT-25	- 40°C to + 85°C

Note: ww represents the date code and pls refer to Date Code Rule before Package Dimension.

* A line on top of the first letter represents lead free plating such as $\overline{\text{B}}\text{ECww}$.

Please consult AME sales office or authorized Rep./Distributor for the availability of package type.



AME, Inc.

AME7720 / 7721

Step-Up/Step-Down
60mA Regulated Charge Pump

■ Absolute Maximum Ratings

Parameter	Maximum	Unit
Input Voltage	5.5	V
ESD Classification	C*	

Caution: Stress above the listed absolute maximum rating may cause permanent damage to the device.

* HBM C:4000V+

■ Recommended Operating Conditions

Parameter	Symbol	Rating	Unit
Ambient Temperature Range	T_A	- 40 to + 85	°C
Junction Temperature Range	T_J	- 40 to + 125	°C

■ Thermal Information

Parameter	Package	Die Attach	Symbol	Maximum	Unit
Thermal Resistance* (Junction to Case)	SOT-26	Conductive Epoxy	θ_{JC}	81	$^{\circ}\text{C/W}$
	SOT-25	Conductive Epoxy			
Thermal Resistance (Junction to Ambient)	SOT-26	Conductive Epoxy	θ_{JA}	260	
	SOT-25	Conductive Epoxy			
Internal Power Dissipation	SOT-26	Conductive Epoxy	P_D	400	mW
	SOT-25	Conductive Epoxy			
Maximum Junction Temperature				150	$^{\circ}\text{C}$
Solder Iron (10Sec)**				350	

* Measure θ_{JC} on center of molding compound if IC has no tab.

** MIL-STD-202G 210F



■ Electrical Specifications(AME7720)

$T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, $V_{IN} = V_{OUT}/2 + 0.75\text{V}$, $I_{OUT} = 5\text{mA}$, $C_{IN} = C_{OUT} = 2.2\mu\text{F}$, $C_{PUMP} = 0.22\mu\text{F}$, $V_{EN} = 1.3\text{V}$
Typical Values are at $T_A = 25^{\circ}\text{C}$.

Parameter	Symbol	Test Conditions		Min	Typ	Max	Units
Input Voltage	V _{IN}	V _{OUT} = 5V		2.7		5.5	V
		V _{OUT} = 3.3V		1.8		5.5	
Output Voltage	V _{OUT}	I _{OUT} ≤ 15mA, 2.7V < V _{IN} < 5.5V		4.75	5	5.25	V
		I _{OUT} ≤ 60mA, 3.0V < V _{IN} < 5.5V					
		I _{OUT} ≤ 15mA, 1.8V < V _{IN} < 5.5V		3.14	3.3	3.46	
		I _{OUT} ≤ 60mA, 2.2V < V _{IN} < 5.5V					
Quiescent Current	I _Q	1.8V < V _{IN} < 5.5V, I _{OUT} = 0mA	T _A =-40~+85°C		60	100	μA
		1.8V < V _{IN} < 5.5V, EN = GND			0.01	0.1	
Output Current	I _{OUT}	V _{OUT} = 5V		60			mA
Short Circuit Current Limit	I _{SC}	V _{OUT} = GND			80		mA
Ripple Voltage ¹	V _{RIPPLE}	V _{IN} = 3V, I _{OUT} = 60mA	T _A =25°C		50		mVp-p
Efficiency	η	I _{OUT} = 15mA, V _{IN} = 2.7V			90		%
Frequency	f _{OSC}	Oscillator Free Running			1.0		MHz
EN Input Threshold High	V _{IH}			1.3			V
EN Input Threshold Low	V _{IL}					0.6	V
EN Input Current High	I _{IH}	EN = V _{IN}				0.1	μA
EN Input Current Low	I _{IL}	EN = GND				0.1	μA
V _{OUT} Turn-on time	t _{ON}	V _{IN} = 3V, I _{OUT} = 60mA	T _A =25°C		0.15		ms
Over Temperature Shutdown	OTS				160		°C
Over Temperature Hysteresis	OTH				20		

Note 1: Effective series resistance (ESR) of capacitors is $< 0.1\Omega$.



AME, Inc.

AME7720 / 7721

Step-Up/Step-Down 60mA Regulated Charge Pump

■ Electrical Specifications(AME7721)

$T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, $V_{IN} = V_{OUT}/2 + 0.75\text{V}$, $I_{OUT} = 5\text{mA}$ $C_{IN} = 2.2\mu\text{F}$, $C_{PUMP} = 0.22\mu\text{F}$

Typical Values are at $T_A = 25^{\circ}\text{C}$

Parameter	Symbol	Test Conditions		Min	Typ	Max	Units
Input Voltage	V _{IN}	V _{OUT} = 5V		2.7		5.5	V
		V _{OUT} = 3.3V		1.8		5.5	
Output Voltage	V _{OUT}	I _{OUT} <= 15mA, 2.7V < V _{IN} < 5.5V		4.75	5	5.25	V
		I _{OUT} <= 60mA, 3.0V < V _{IN} < 5.5V					
		I _{OUT} <= 15mA, 1.8V < V _{IN} < 5.5V		3.14	3.3	3.46	
		I _{OUT} <= 60mA, 2.2V < V _{IN} < 5.5V					
Quiescent Current	I _Q	1.8V < V _{IN} < 5V, I _{OUT} =0mA	T _A =-40~+85°C		60	100	μA
Output Current	I _{OUT}	V _{OUT} = 5V		60			mA
Short Circuit Current Limit	I _{SC}	V _{OUT} = GND			80		mA
Ripple Voltage ¹	V _{RIPPLE}	V _{IN} = 3V, I _{OUT} = 60mA	T _A =25°C		50		mVp-p
Efficiency	η	I _{OUT} = 15mA, V _{IN} = 2.7V			90		%
Frequency	f _{OSC}	Oscillator Free Running			1.0		MHz
V _{OUT} Turn-on time	t _{ON}	V _{IN} = 3V, I _{OUT} = 60mA	T _A =25°C		0.15		ms
Over Temperature Shutdown	OTS				160		°C
Over Temperature Hysterisis	OTH				20		

Note 1: Effective series resistance (ESR) of capacitors is $< 0.1\Omega$.



■ Detailed Description

The AME7720 / 7721 regulated charge pump provides a regulated output voltages ranging from less than the output to greater than the output. This is accomplished by automatic mode switching within the device.

■ Short Circuit and Thermal Protection

The AME7720 / 7721 has a thermal protection and shutdown circuit that continuously monitors the IC junction temperature. If the thermal protection circuit senses the die temperature exceeding approximately 160°C, the thermal shutdown will disable the charge pump switching cycle operation. The thermal limit system has 20°C of system hysteresis before the charge pump can reset. Once the over current event is removed from the output and the junction temperature drops below 140°C, the charge pump will become active again. The thermal protection system will cycle on and off if an output short circuit condition persists. This will allow the AME7720 / 7721 to operate indefinitely a short circuit condition without damage to the device.

■ Shutdown Mode

A control pin on the regulator can be used to place the device into an energy-saving shutdown mode. In this mode, the output is disconnected from the input as long as V_{IN} is greater than or equal to minimum V_{IN} and input quiescent current is reduced to 1μA maximum.

■ Capacitor Selection

For minimum output voltage ripple, the output capacitor C_{OUT} should be a ceramic, surface-mount type. Tantalum capacitors generally have a higher Effective Series Resistance (ESR) and may contribute to higher output voltage ripple. Leaded capacitors also increase ripple due to the higher inductance of the package itself. To achieve best operation with low input voltage and high load current, the input and pump capacitors (C_{IN} , C_{PUMP} respectively) should also be surface-mount ceramic types. In all cases, X7R or X5R dielectric are recommended.

With light loads or higher input voltage, a smaller 0.1μF pump capacitor (C_{PUMP}) and smaller 1μF input and output capacitor (C_{IN} and C_{OUT} , respectively) can be used. To minimize output voltage ripple, increase the output capacitor, C_{OUT} , to 10μF or larger.

■ Efficiency

The efficiency of the charge pump regulator varies with the output voltage version, the applied input voltage, the load current, and the internal operation mode of the device.

The approximate efficiency is given by:

$$\begin{aligned} & \text{5V Version } (V_{IN} \leq V_{OUT}) \\ \text{Efficiency (\%)} &= V_{OUT} / 2V_{IN} \cdot 100 \end{aligned}$$

$$\begin{aligned} & \text{3.3V Version } (V_{IN} > V_{OUT}) \\ \text{Efficiency (\%)} &= V_{OUT} / V_{IN} \cdot 100 \end{aligned}$$

■ Layout

Large ripple currents flow in the V_{IN} and V_{OUT} traces. To minimize both input and output ripple, keep the capacitors as close as possible to the regulator using short, direct circuit traces.

The trace lengths from the input and output capacitors have been kept as short as possible. A star ground system has been implemented, with GND pin as the center of the star. No ground plane is provided in other layers, as this will provide capacitive coupling for noise spikes.




AME, Inc.


AME7720 / 7721

Step-Up/Step-Down 60mA Regulated Charge Pump


Efficiency vs. V_{IN}

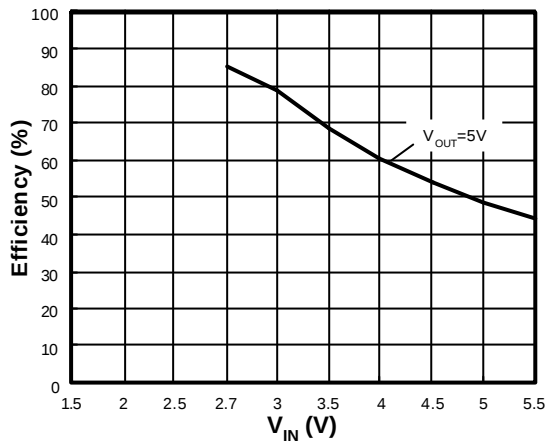


Short-Circuit Load Current vs V_{IN}

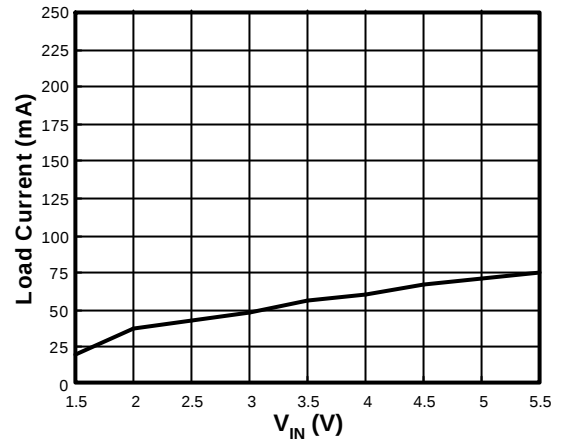


Shutdown Supply Current vs Temperature

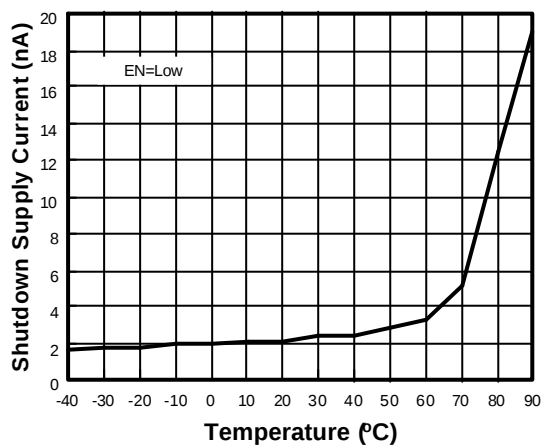


Maximum Load Current vs Input Voltage

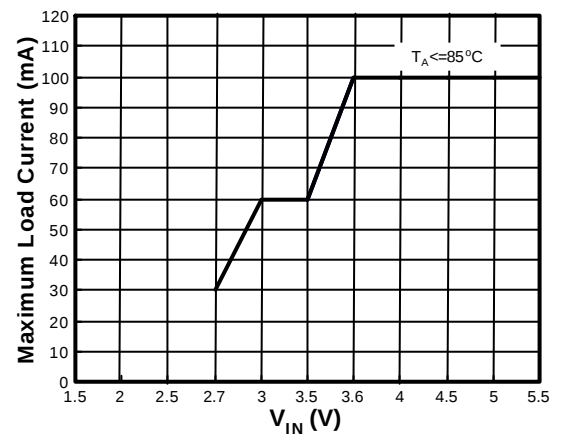

Efficiency vs Load Current

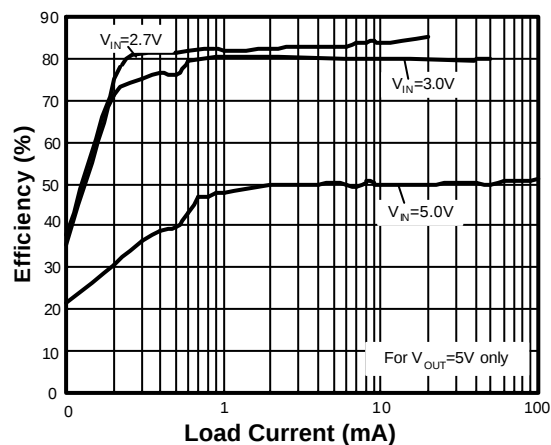

Quiescent Current vs Temperature
(No Load)

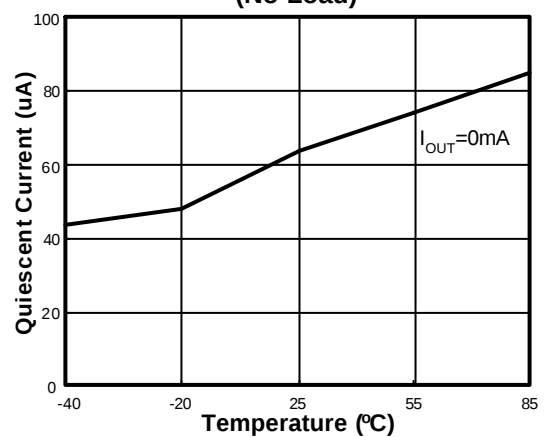




AME, Inc.


AME7720 / 7721

Step-Up/Step-Down 60mA Regulated Charge Pump


Output Ripple Voltage vs V_{IN}

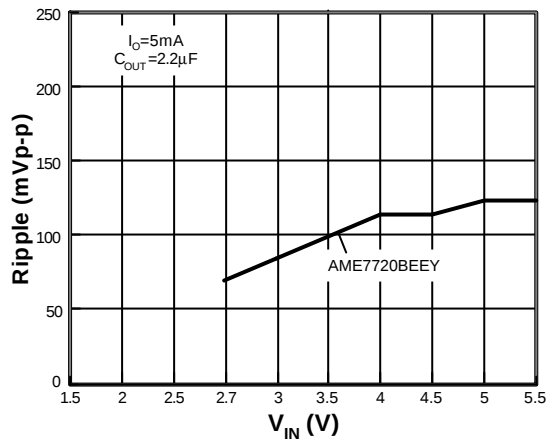


Load Transient Response

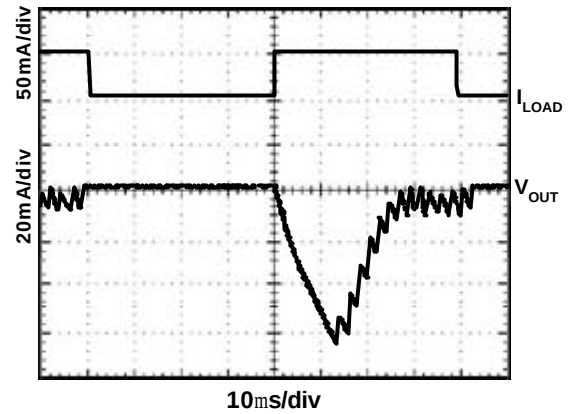

Output Voltage vs Temperature

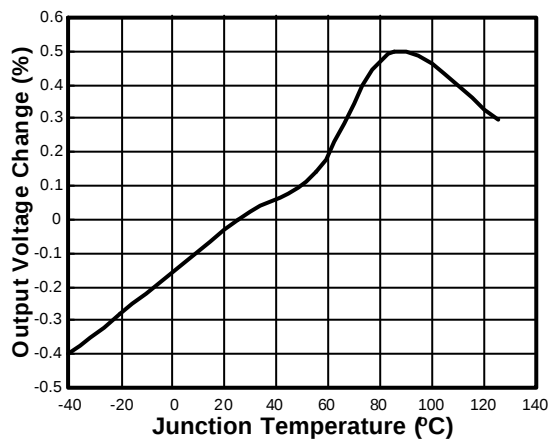

Input Current at Turn-On

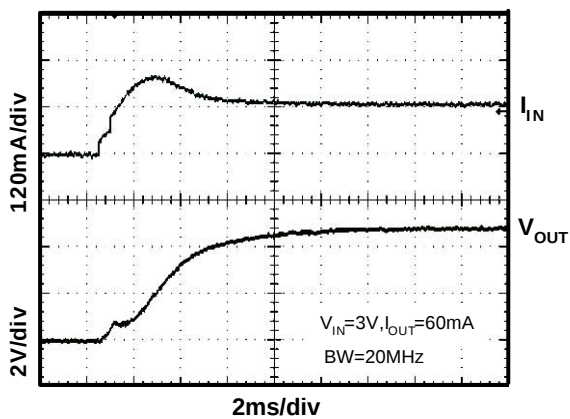




■ Date Code Rule

Marking			Date Code		Year
A	A	A	W	W	xxx0
A	A	A	W	<u>W</u>	xxx1
A	A	A	<u>W</u>	W	xxx2
A	A	A	<u>W</u>	<u>W</u>	xxx3
A	A	<u>A</u>	W	W	xxx4
A	A	<u>A</u>	W	<u>W</u>	xxx5
A	A	<u>A</u>	<u>W</u>	W	xxx6
A	A	<u>A</u>	<u>W</u>	<u>W</u>	xxx7
A	<u>A</u>	A	W	W	xxx8
A	<u>A</u>	A	W	<u>W</u>	xxx9

■ Tape & Reel Dimension

SOT-26

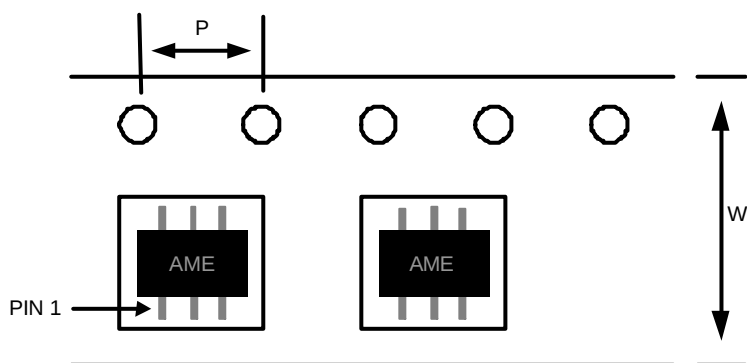


Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-26	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm


■ Tape & Reel Dimension

TSOT-26

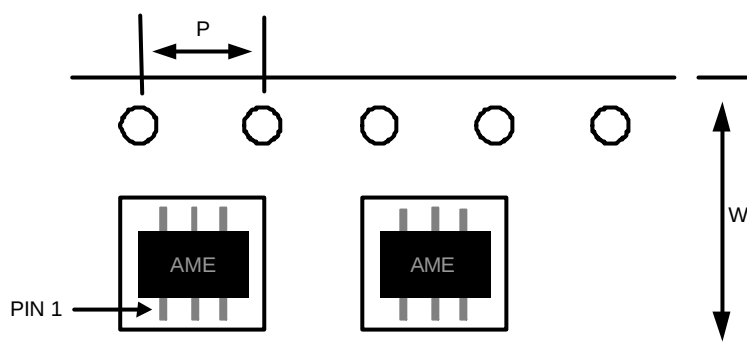


Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
TSOT-26	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

SOT-25

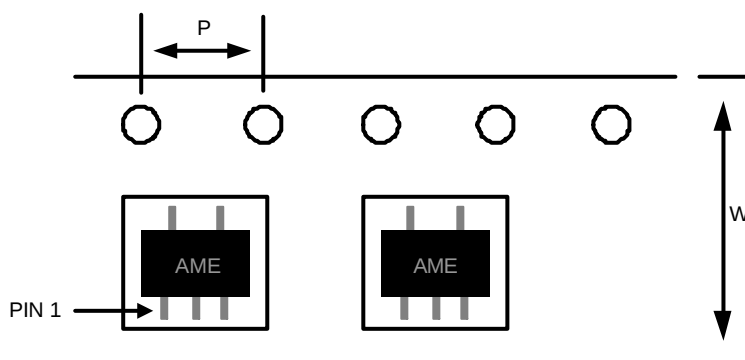

Carrier Tape, Number of Components Per Reel and Reel Size


Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-25	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

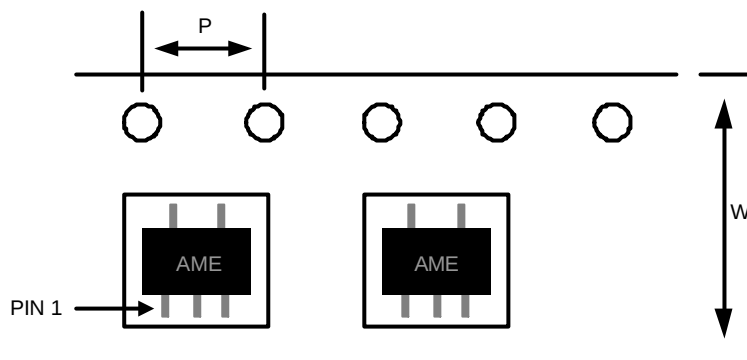■ Tape and Reel Dimension
TSOT-25

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
TSOT-25	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm


■ Package Dimension

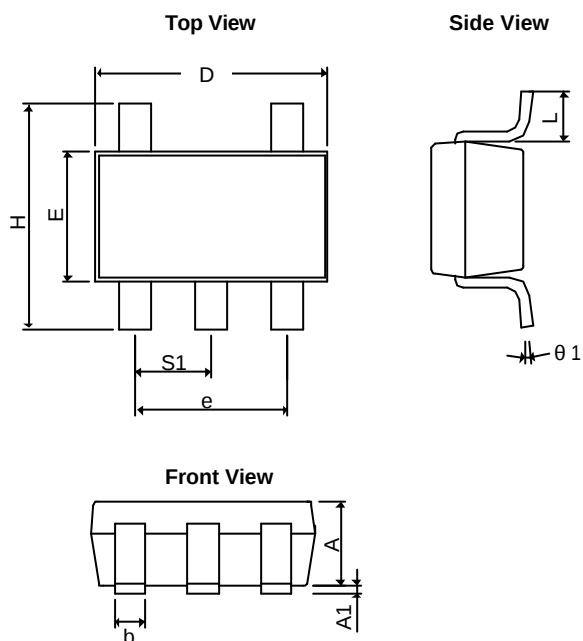SOT-25




SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.20REF		0.0472REF	
A ₁	0.00	0.15	0.0000	0.0059
b	0.30	0.55	0.0118	0.0217
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.07480 BSC	
H	2.60	3.00	0.10236	0.11811
L	0.37BSC		0.0146BSC	
$\theta 1$	0°	10°	0°	10°
S ₁	0.95BSC		0.0374BSC	


SOT-26

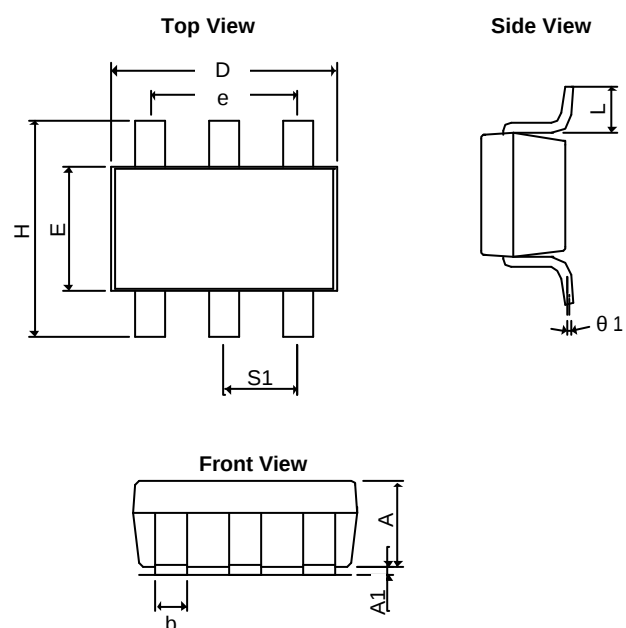

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.20REF		0.0472REF	
A ₁	0.00	0.15	0.0000	0.0059
b	0.30	0.55	0.0118	0.0217
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.60	3.00	0.10236	0.11811
L	0.37REF		0.0146REF	
$\theta 1$	0°	10°	0°	10°
S ₁	0.95REF		0.0374REF	

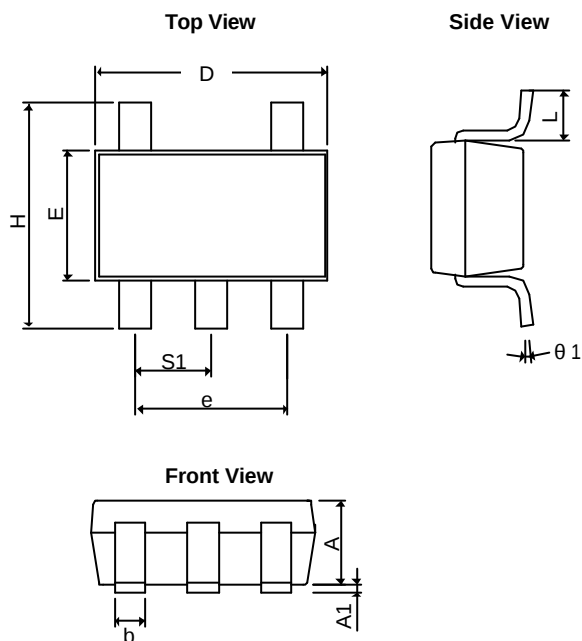■ Package Dimension
TSOT-25


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A+A ₁	1.00	1.30	0.0394	0.0512
b	0.30	0.55	0.0118	0.0217
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.07480 BSC	
H	2.60	3.00	0.10236	0.11811
L	0.37BSC		0.0146BSC	
∠1	0°	10°	0°	10°
S ₁	0.95BSC		0.0374BSC	

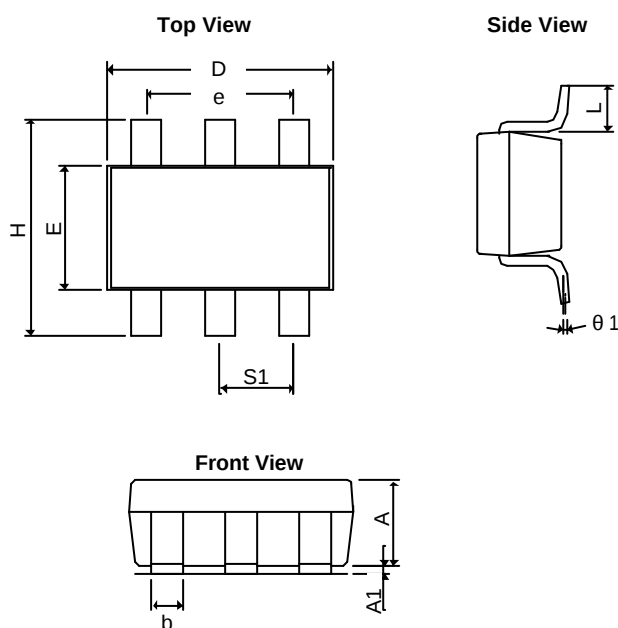TSOT-26


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A+A ₁	1.00	1.30	0.0394	0.0512
b	0.30	0.55	0.0118	0.0217
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.60	3.00	0.10236	0.11811
L	0.37REF		0.0146REF	
∠1	0°	10°	0°	10°
S ₁	0.95REF		0.0374REF	



www.ame.com.tw
E-Mail: sales@ame.com.tw

Life Support Policy:

These products of AME, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of AME, Inc.

AME, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

©AME, Inc. , March 2006

Document: 1121-DS7720/7721-A.02

Corporate Headquarter
AME, Inc.

2F, 302 Rui-Guang Road, Nei-Hu District
Taipei 114, Taiwan, R.O.C.
Tel: 886 2 2627-8687
Fax: 886 2 2659-2989

U.S.A. (Subsidiary)
Analog Microelectronics, Inc.

3100 De La Cruz Blvd., Suite 201
Santa Clara, CA. 95054-2046
Tel : (408) 988-2388
Fax: (408) 988-2489