

ISDN S Interface Hybrid


APC5568-3v

ELECTRICAL SPECIFICATIONS @ 25°C

Turns Ratio +/-5%	Primary Inductance mH min	Leakage Inductance uH max	Primary DCR OHMS +/- 30%	Secondary DCR OHMS +/- 30%	Choke	
					Inductance per line mH nom	DCR per line OHMS
1CT:2	22	5.0	2.2	2.8	0.04	0.5


NOTES: ISOLATION PRI:SEC 1500VRMS
 APPROVALS PENDING FOR IEC6950:A4:1996 AND EN60950:A4:1997
 DESIGNED FOR USE WITH MOTOROLA MC145575 AND COLOGNE HFC-SXX
 EXTERNAL RESISTORS R1 AND R1' REQUIRED FOR AMPLITUDE OPTIMIZATION. RECOMMENDED VALUE 560 OHMS

MECHANICAL

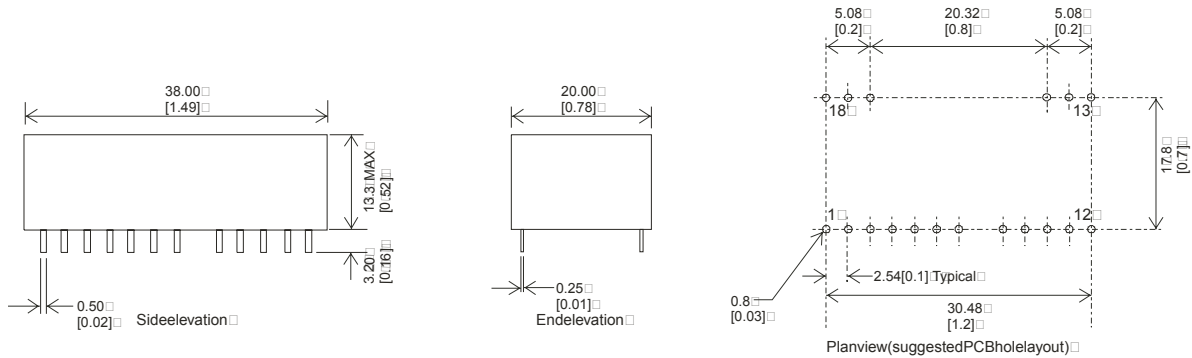

NOTES: NOT TO SCALE
 TOLERANCE +/- 0.2MM
 ALL DIMENSIONS IN MM [INCHES]
 DOT ON TOP SURFACE INDICATES PIN 1

SCHEMATIC

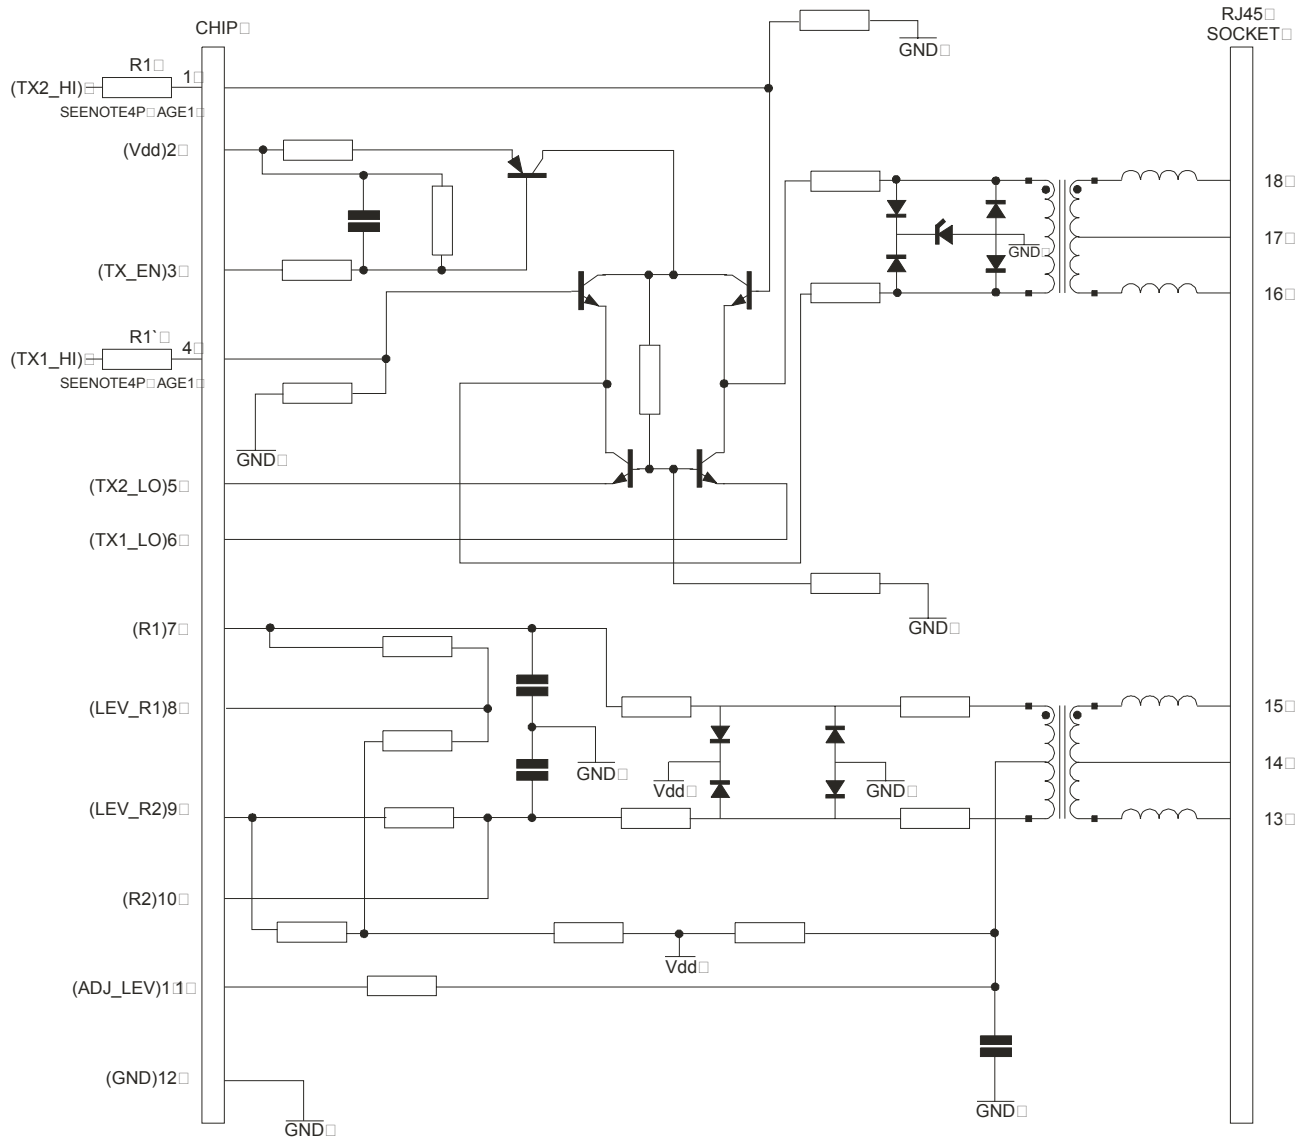

©2006 Bel Fuse Inc. Specifications subject to change without notice. 08.02.06

CORPORATE

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
 www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F / 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
 www.belfuse.com

EUROPE

Bel Stewart Connector
 45/46 Riverside
 Medway City Estate
 Rochester, Kent ME2 4DP U.K.
 Tel 44-1634-722890
 Fax 44-1634-716677
 www.belfuse.com