



# ISDN/Smartphone Splitter

APC77115





## ELECTRICAL SPECIFICATIONS @ 25°C OPERATING TEMPERATURE -40°C TO +85°C

Description	Passband Frequency	Insertion Loss max	Return Loss min	Stopband Frequency	Attenuation min	Impedance
ISDN/ Smartphone Splitter LPF	DC to 660kHz	0.8 dB	15 dB	900kHz to 7.9 MHz	50 dB	150 Ω

## SCHEMATIC

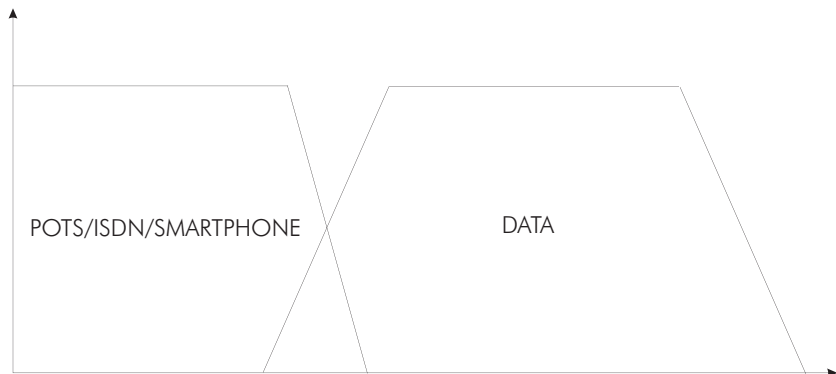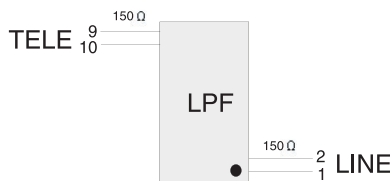

## MECHANICAL

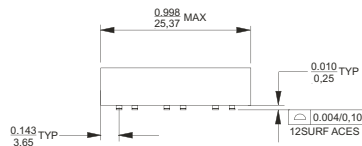

NOTES: DIMENSIONS INCHES UNLESS OTHERWISE SPECIFIED  
MM

ALL TOLERANCES +/- 0.010  
0.25