

**SOD-523 Plastic-Encapsulate Diodes****BAS516** Switching Diodes**FEATURES**

- Small surface mounting type
- High switching speed




Marking: 61

**Maximum Ratings and Electrical Characteristics, Single Diode @T_A=25°C**

Parameter	Symbol	Limits	Unit
DC reverse voltage	V _R	75	V
Mean rectifying current	I _O	250	mA
Peak forward surge current	I _{FSM}	0.5	A
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-65~+150	°C

Electrical Ratings @T_A=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V _F			0.715 0.855 1 1.25	V	I _F =1mA I _F =10mA I _F =50mA I _F =150mA
Reverse current	I _R			0.03 1	μA	V _R =25V V _R =75V
Capacitance between terminals	C _T			1	pF	V _R =0, f=1MHZ
Reverse recovery time	t _{rr}			4	ns	I _F =10mA, R _L =100Ω

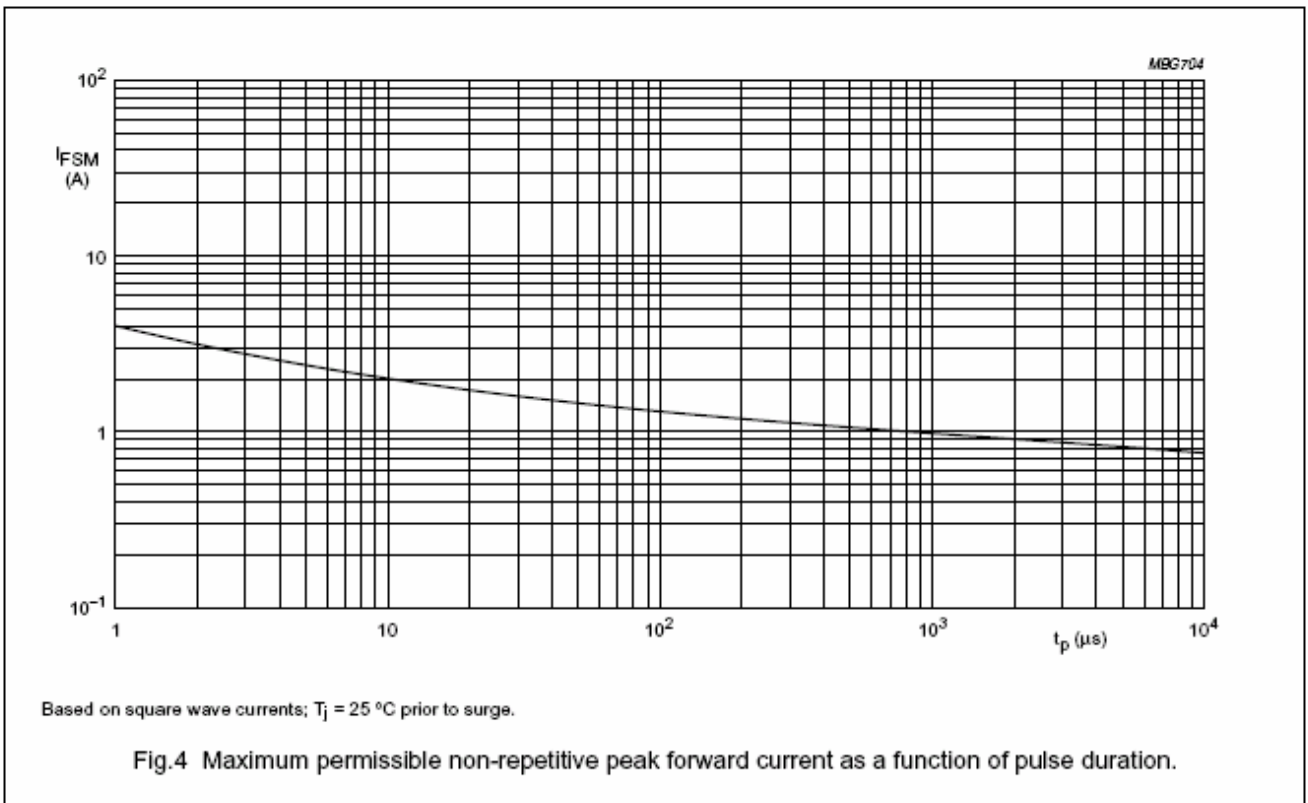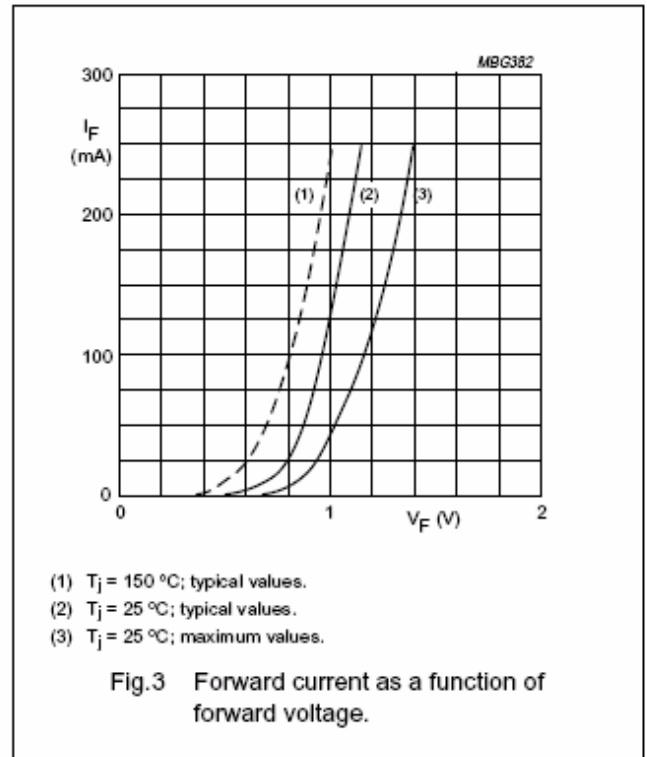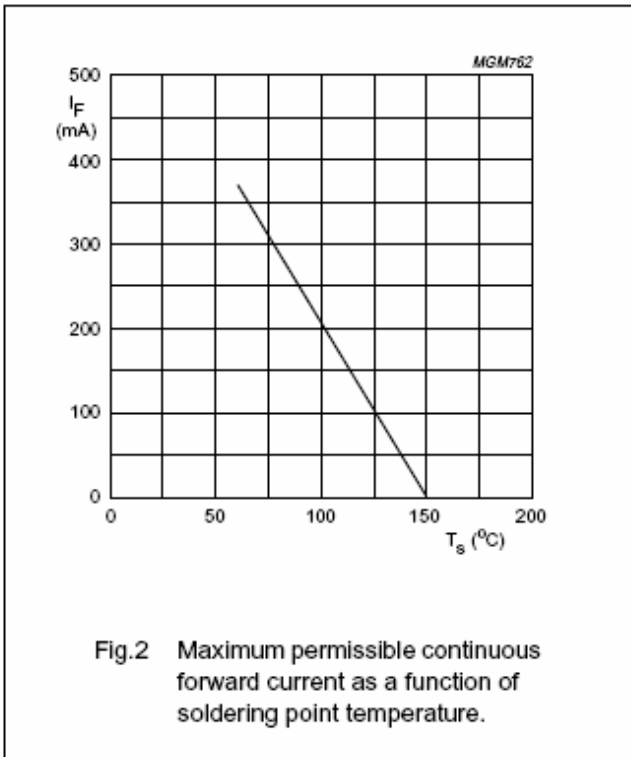


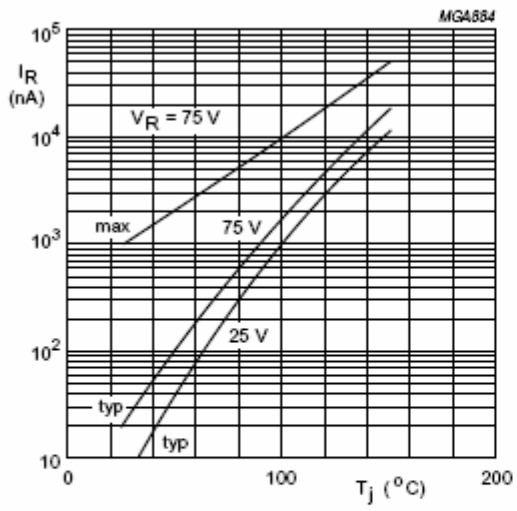


Fig.5 Reverse current as a function of junction temperature.

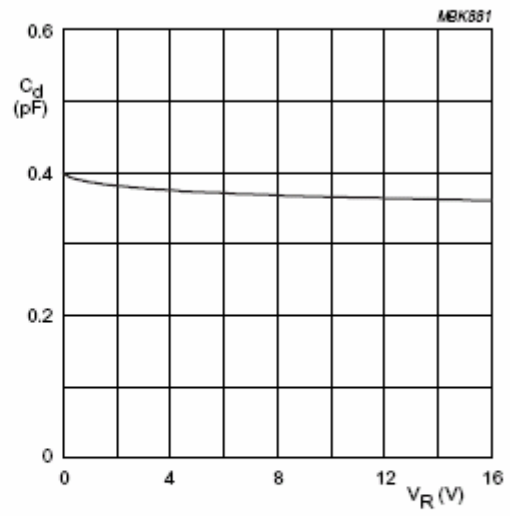

$f = 1$ MHz; $T_j = 25$ °C.

Fig.6 Diode capacitance as a function of reverse voltage; typical values.