


GENERAL PURPOSE APPLICATION.
SWITCHING APPLICATION.

FEATURES

- Super Mini Packaged Transistors for Hybrid circuits.
- For Complementary with NPN Type BCW71/72, BCV71.


MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	BCW69/70	V_{CBO}	-50	V
	BCW89		-60	
Collector-Emitter Voltage	BCW69/70	V_{CEO}	-45	V
	BCW89		-60	
Emitter-Base Voltage		V_{EBO}	-5	V
Collector Current		I_C	-100	mA
Emitter Current		I_E	100	mA
Collector Power Dissipation		P_C	200	mW
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-65~150	°C

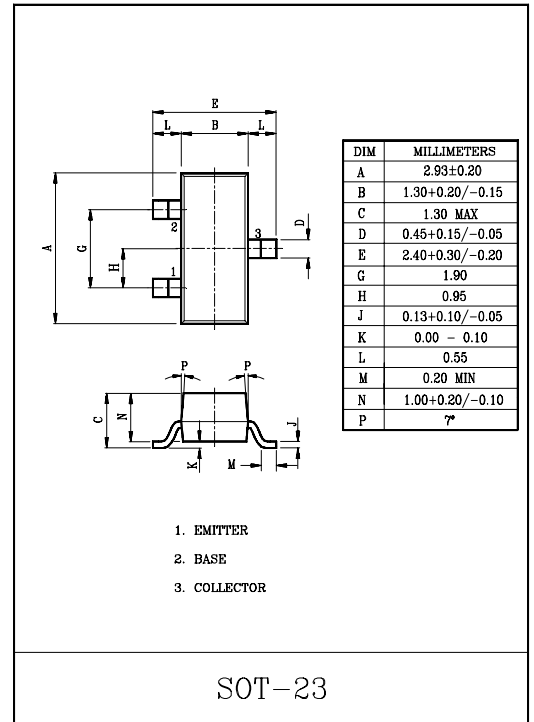

MARK SPEC

TYPE	MARK
BCW69	H 1
BCW70	H 2
BCW89	H 5

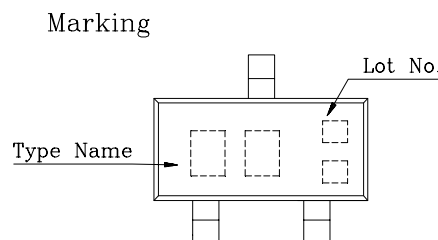

BCW69/70/89

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector-Emitter Breakdown Voltage	BCW69/70	$V_{(BR)CEO}$	$I_C = -2mA, I_B = 0$	-45	-	-	V
	BCW89			-60	-	-	
Collector-Base Breakdown Voltage	BCW69/70	$V_{(BR)CBO}$	$I_C = -10\mu A, I_E = 0$	-50	-	-	V
	BCW89			-60	-	-	
Collector-Emitter Breakdown Voltage	BCW69/70	$V_{(BR)CES}$	$I_C = -10\mu A, V_{BE} = 0$	-50	-	-	V
	BCW89			-60	-	-	
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E = 10\mu A, I_C = 0$	-5.0	-	-	V
Collector Cut-off Current		I_{CBO}	$V_{CB} = -20V, I_E = 0$	-	-	-100	nA
			$T_a = 100^\circ C, V_{CB} = -20V, I_E = 0$	-	-	-10	μA
DC Current Gain	BCW69/89	h_{FE}	$V_{CE} = -5V, I_C = -10\mu A$	-	90	-	
	BCW70			-	150	-	
	BCW69/89		$V_{CE} = -5V, I_C = -2mA$	120	-	260	
	BCW70			215	-	500	
Base-Emitter Voltage		$V_{BE(ON)}$	$V_{CE} = -5V, I_C = -2mA$	-600	-	-750	mV
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C = -10mA, I_B = -0.5mA$	-	-720	-	mV
			$I_C = -50mA, I_B = -2.5mA$	-	-810	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C = -10mA, I_B = -0.5mA$	-	-	-300	mV
			$I_C = -50mA, I_B = -2.5mA$	-	-180	-	
Transition Frequency		f_T	$I_C = -10mA, V_{CE} = -5V, f = 100MHz$	-	150	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	-	7.0	pF
Noise Figure		NF	$I_C = -0.2mA, V_{CE} = -5V, R_g = 2k\Omega, f = 1kHz$	-	-	10	dB