


SOT23 PNP PLANAR SMALL SIGNAL TRANSISTORS

ISSUE 2 – FEBRUARY 1995

BCW89

PARTMARKING DETAILS – BCW89 – H3
BCW89R – H6




ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	-80	V
Collector-Emitter Voltage	V_{CES}	-60	V
Collector-Emitter Voltage ($I_C = -2\text{mA}$)	V_{CEO}	-60	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-100	mA
Peak Collector Current	I_{CM}	-200	mA
Power Dissipation at $T_{amb}=25^\circ\text{C}$	P_{tot}	330	mW
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Cut-Off Current	I_{CBO}			-100 -10	nA μA	$I_E = 0, V_{CB} = -20\text{V}$ $I_E = 0, V_{CB} = -20\text{V}, T_j = 100^\circ\text{C}$
Base-Emitter Voltage	V_{BE}	-600		-750	mV	$I_C = -2.0\text{mA}, V_{CE} = -5.0\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-80 -150	-300	mV mV	$I_C = -10\text{mA}, I_B = -0.5\text{mA}$ $I_C = -50\text{mA}, I_B = -2.5\text{mA}$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-720 -810		mV mV	$I_C = -10\text{mA}, I_B = -0.5\text{mA}$ $I_C = -50\text{mA}, I_B = -2.5\text{mA}$
Static Forward Current Transfer Ratio	h_{FE}	120	90	260		$I_C = -10\mu\text{A}, V_{CE} = -5.0\text{V}$ $I_C = -2.0\text{mA}, V_{CE} = -5.0\text{V}$
Transition Frequency	f_T		150		MHz	$I_C = -10\text{mA}, V_{CE} = -5.0\text{V}$ $f = 35\text{MHz}$
Collector Capacitance	C_{TC}			7	pF	$I_E = I_B = 0, V_{CB} = -10\text{V}$ $f = 1\text{MHz}$
Noise Figure	N			10	dB	$I_C = -200\mu\text{A}, V_{CE} = -5.0\text{V}$ $R_S = 2.0\text{K}\Omega, f = 1\text{KHz}$ $B = 200\text{Hz}$

Spice parameter data is available upon request for this device



DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	2.67	3.05	0.105	0.120
B	1.20	1.40	0.047	0.055
C	-	1.10	-	0.043
D	0.37	0.53	0.0145	0.021
F	0.085	0.15	0.0033	0.0059
G	NOM 1.9		NOM 0.075	
K	0.01	0.10	0.0004	0.004
L	2.10	2.50	0.0825	0.0985
N	NOM 0.95		NOM 0.37	

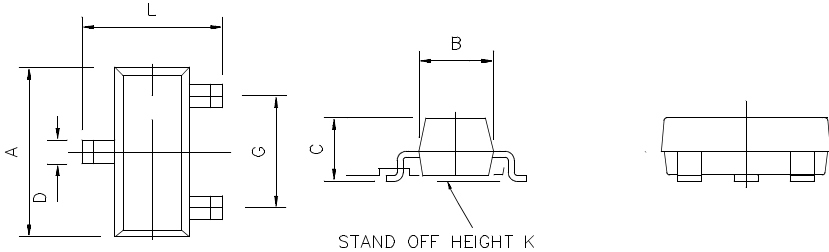

Zetex plc.
 Fields New Road, Chadderton, Oldham, OL9-8NP, United Kingdom.
 Telephone: (44)161-627 5105 (Sales), (44)161-627 4963 (General Enquiries)
 Facsimile: (44)161-627 5467

Zetex GmbH
 Streitfeldstraße 19
 D-81673 München
 Telefon: (49) 89 45 49 49 0
 Fax: (49) 89 45 49 49 49

Zetex Inc.
 87 Modular Avenue
 Commack NY11725
 Telephone: (516) 543-7100
 Fax: (516) 864-7630

Zetex (Asia) Ltd.
 3510 Metroplaza, Tower 2
 Hing Fong Road, Kwai Fong
 Telephone: (852) 26100 611
 Fax: (852) 24250 494

These are supported by
 agents and distributors in
 major countries world-wide
 © Zetex plc 1995

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.