





Type	BMT-1606WS	BMT-1612WS
Rated Voltage(V)	6	12
Operating Voltage(V)	3~12	6~18
◆Rated Current(mA)	< 40	
Coil Resistance(Ω)	45±7	115±17
◇Coil Impedance(Ω)	110	200
◆Sound Output at 10cm(dB)	> 85	
Resonant Frequency(Hz)	2000~3000(> 85dB)	
Operating Temperature($^{\circ}$ C)	-40~+85	
Storage Temperature($^{\circ}$ C)	-40~+85	
Weight(g)	7	

- ◆ Value applying rated voltage(2048Hz, 1/2 duty, square wave)
- ◇ Value applying(2048Hz, sine wave, measuring current 60 μ A)

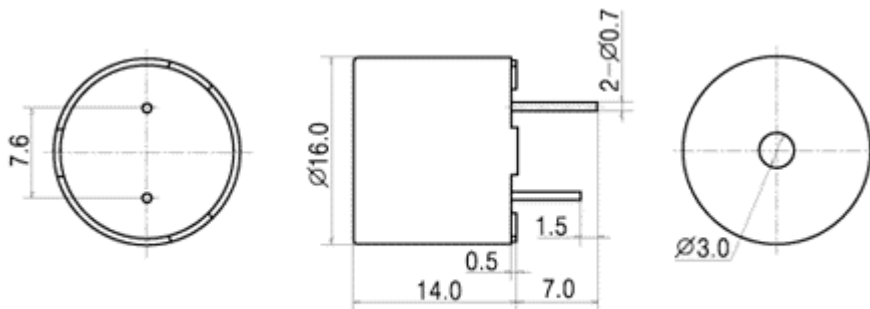

Unit:mm

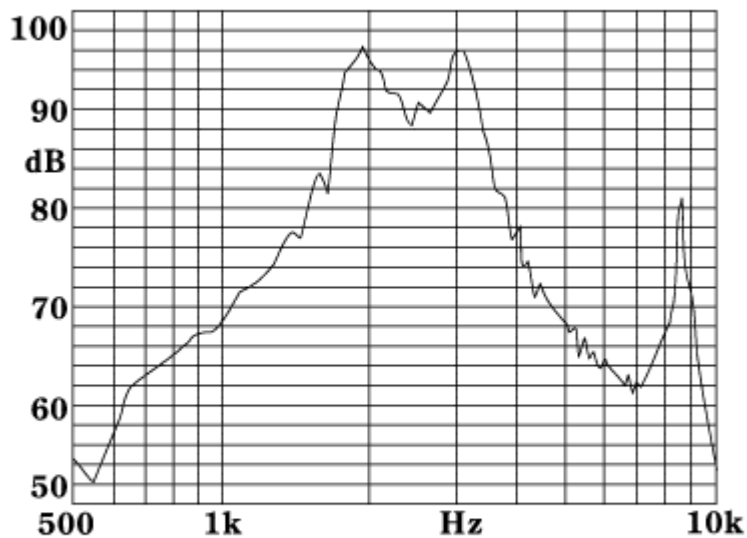

Applied voltage:6V, 1/2 duty, square wave
 Distance for measurement:10cm