




CED6601/CEU6601

P-Channel Enhancement Mode Field Effect Transistor

FEATURES

- -60V, -16A, $R_{DS(ON)} = 86m\Omega$ @ $V_{GS} = -10V$.
 $R_{DS(ON)} = 125m\Omega$ @ $V_{GS} = -4.5V$.
- Super high dense cell design for extremely low $R_{DS(ON)}$.
- High power and current handling capability.
- Lead free product is acquired.
- TO-251 & TO-252 package.

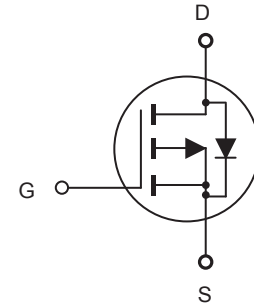

ABSOLUTE MAXIMUM RATINGS $T_C = 25^\circ C$ unless otherwise noted

| Parameter | Symbol | Limit | Units |
|---|----------------|------------|---------------|
| Drain-Source Voltage | V_{DS} | -60 | V |
| Gate-Source Voltage | V_{GS} | ± 20 | V |
| Drain Current-Continuous | I_D | -16 | A |
| Drain Current-Pulsed ^a | I_{DM} | -64 | A |
| Maximum Power Dissipation @ $T_C = 25^\circ C$ - Derate above $25^\circ C$ | P_D | 42 | W |
| | | 0.33 | W/ $^\circ C$ |
| Operating and Store Temperature Range | T_J, T_{stg} | -55 to 150 | $^\circ C$ |

Thermal Characteristics

| Parameter | Symbol | Limit | Units |
|---|-----------------|-------|--------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 3 | $^\circ C/W$ |
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 50 | $^\circ C/W$ |



CED6601/CEU6601

Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted

| Parameter | Symbol | Test Condition | Min | Typ | Max | Units |
|--|--------------|--|-----|------|------|-----------|
| Off Characteristics | | | | | | |
| Drain-Source Breakdown Voltage | BV_{DSS} | $V_{GS} = 0V, I_D = -250\mu A$ | -60 | | | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS} = -60V, V_{GS} = 0V$ | | | -1 | μA |
| Gate Body Leakage Current, Forward | I_{GSSF} | $V_{GS} = 20V, V_{DS} = 0V$ | | | 100 | nA |
| Gate Body Leakage Current, Reverse | I_{GSSR} | $V_{GS} = -20V, V_{DS} = 0V$ | | | -100 | nA |
| On Characteristics^b | | | | | | |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{GS} = V_{DS}, I_D = -250\mu A$ | -1 | | -3 | V |
| Static Drain-Source On-Resistance | $R_{DS(on)}$ | $V_{GS} = -10V, I_D = -8A$ | | 70 | 86 | $m\Omega$ |
| | | $V_{GS} = -4.5V, I_D = -6A$ | | 95 | 125 | $m\Omega$ |
| Dynamic Characteristics^c | | | | | | |
| Forward Transconductance | g_{FS} | $V_{DS} = -10V, I_D = -15A$ | | 10 | | S |
| Input Capacitance | C_{iss} | $V_{DS} = -30V, V_{GS} = 0V, f = 1.0\text{ MHz}$ | | 1130 | | pF |
| Output Capacitance | C_{oss} | | | 120 | | pF |
| Reverse Transfer Capacitance | C_{rss} | | | 70 | | pF |
| Switching Characteristics^c | | | | | | |
| Turn-On Delay Time | $t_{d(on)}$ | $V_{DD} = -30V, I_D = -1A, V_{GS} = -10V, R_{GEN} = 6\Omega$ | | 15 | 30 | ns |
| Turn-On Rise Time | t_r | | | 8 | 16 | ns |
| Turn-Off Delay Time | $t_{d(off)}$ | | | 69 | 138 | ns |
| Turn-Off Fall Time | t_f | | | 20 | 40 | ns |
| Total Gate Charge | Q_g | $V_{DS} = -30V, I_D = -3.5A, V_{GS} = -10V$ | | 19.2 | 25.5 | nC |
| Gate-Source Charge | Q_{gs} | | | 3.2 | | nC |
| Gate-Drain Charge | Q_{gd} | | | 4 | | nC |
| Drain-Source Diode Characteristics and Maximum Ratings | | | | | | |
| Drain-Source Diode Forward Current | I_S | | | | -16 | A |
| Drain-Source Diode Forward Voltage ^b | V_{SD} | $V_{GS} = 0V, I_S = -1.3A$ | | | -1.2 | V |
| Notes : □ a.Repetitive Rating : Pulse width limited by maximum junction temperature. b.Pulse Test : Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$. □ c.Guaranteed by design, not subject to production testing. □ | | | | | | |



CED6601/CEU6601

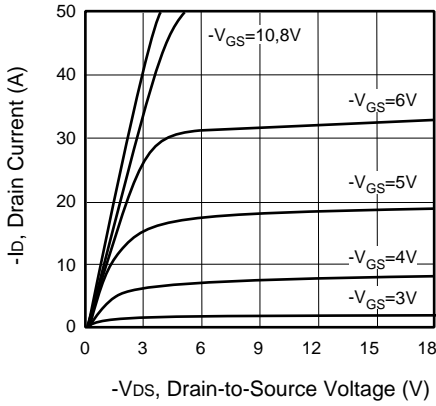


Figure 1. Output Characteristics

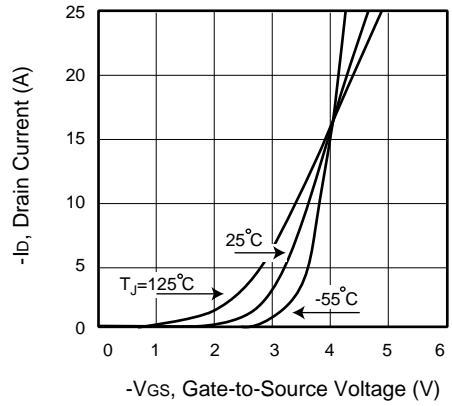


Figure 2. Transfer Characteristics

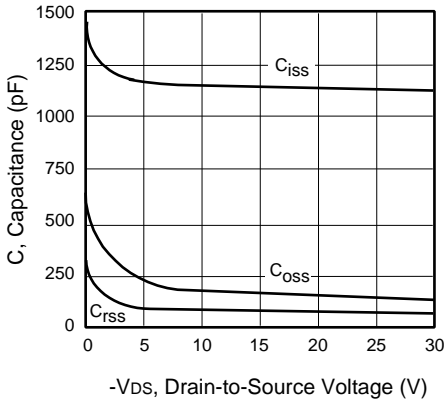


Figure 3. Capacitance

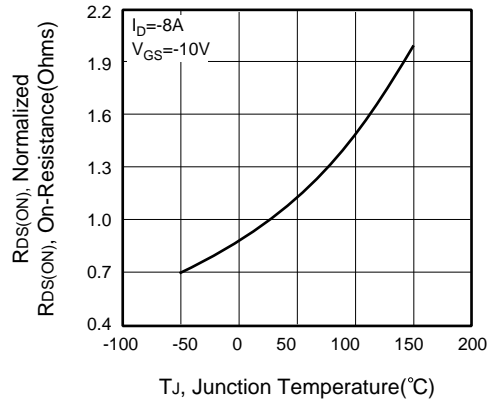


Figure 4. On-Resistance Variation with Temperature

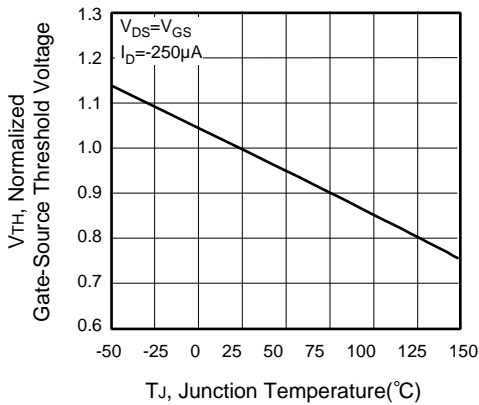


Figure 5. Gate Threshold Variation with Temperature

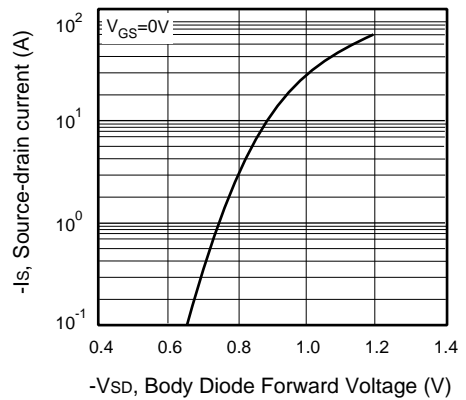


Figure 6. Body Diode Forward Voltage Variation with Source Current



CED6601/CEU6601

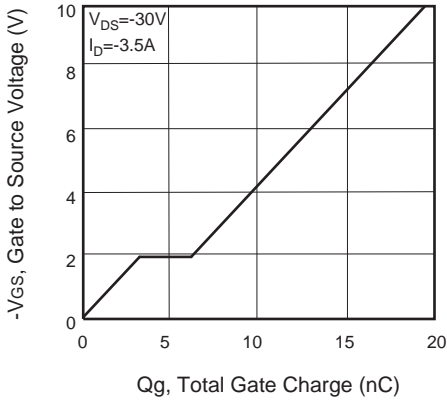


Figure 7. Gate Charge

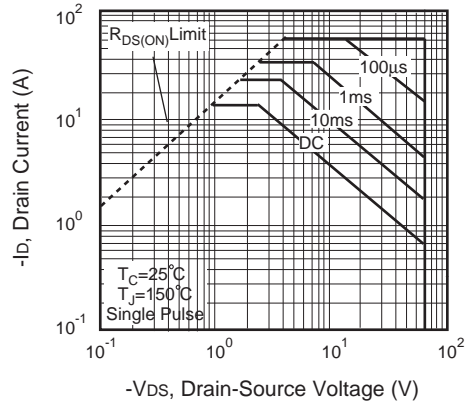


Figure 8. Maximum Safe Operating Area

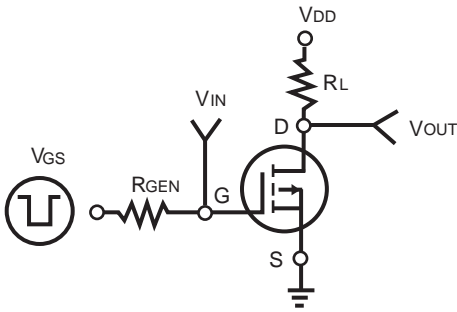


Figure 9. Switching Test Circuit

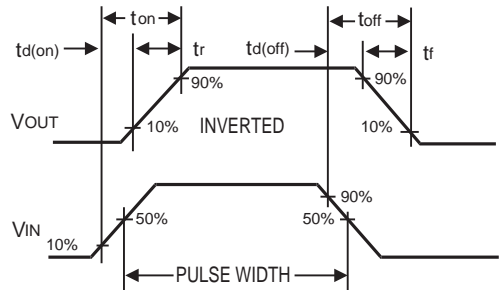


Figure 10. Switching Waveforms

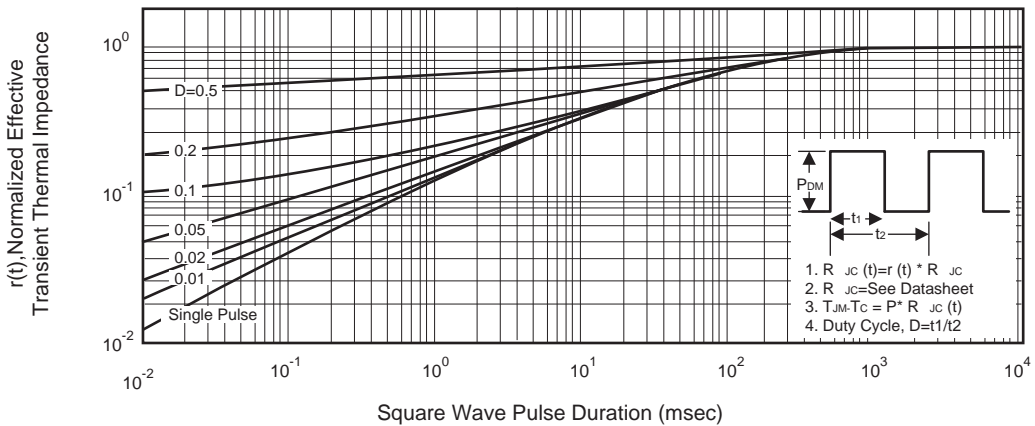


Figure 11. Normalized Thermal Transient Impedance Curve