

## CGRB201 Thru CGRB207

Glass Passivated Type  
Reverse Voltage: 50 - 1000 Volts  
Forward Current: 2.0 Amp




### Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Built-in strain relief
- High surge current capability

### Mechanical data

- Case: JEDEC DO-214AA molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Approx. Weight: 0.093 gram

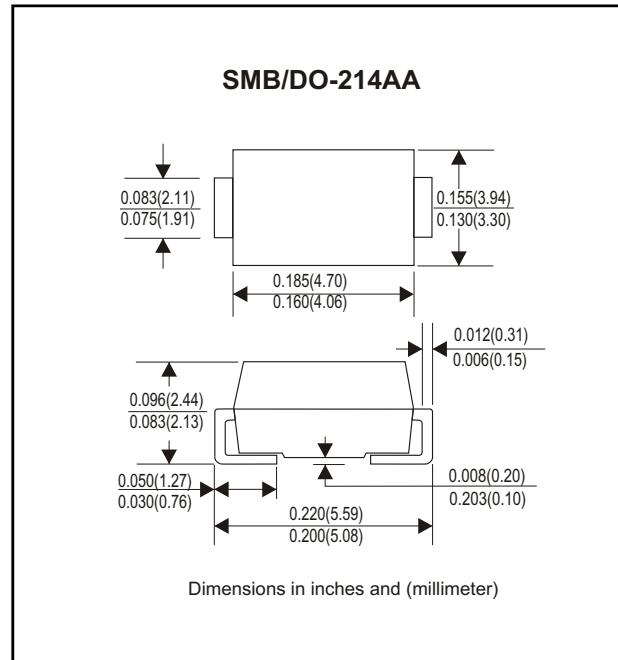

### Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CGRB 201	CGRB 202	CGRB 203	CGRB 204	CGRB 205	CGRB 206	CGRB 207	Unit
Max. Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Max. DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Max. RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Peak Surge Forward Current 8.3ms single halfsine-wave superimposed on rate load ( JEDEC method)	I <sub>FSM</sub>	60							A
Max. Average Forward Current	I <sub>o</sub>	2.0							A
Max. Instantaneous Forward Current at 2.0 A	V <sub>F</sub>	1.1							V
Max. DC Reverse Current at Rated DC Blocking Voltage Ta=25°C Ta=100°C	I <sub>R</sub>	5 50							uA
Max. Thermal Resistance (Note 1)	R <sub>θJL</sub>	16							°C/W
Operating Junction Temperature	T <sub>j</sub>	-55 to +150							°C
Storage Temperature	T <sub>STG</sub>	-55 to +150							°C

Note 1: Thermal resistance from junction to lead 8.0x8.0 mm square (0.13mm thick) land areas.

## Rating and Characteristic Curves (CGRB201 Thru CGRB207)

Fig. 1 - Reverse Characteristics

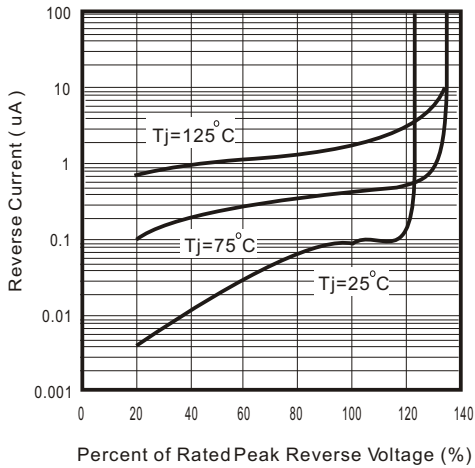


Fig. 2 - Forward Characteristics

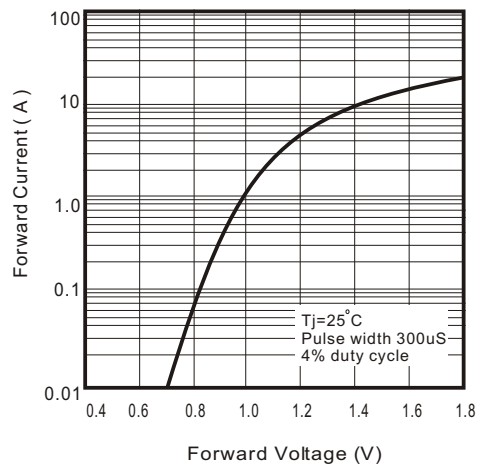


Fig. 3 - Junction Capacitance

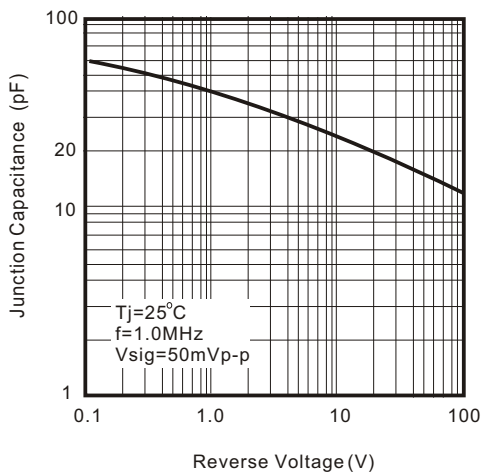


Fig. 4 - Current Derating Curve

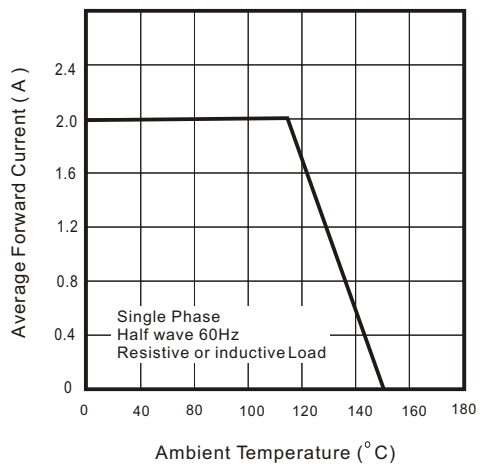


Fig. 5 - Non Repetitive Forward Surge Current

