

Features

- DC to 4 GHz
- Flanged model
- Low VSWR

Applications

- High power RF transmission

CHF5225CNF Series 60 W Power RF Flanged Chip Termination


General Specifications

Substrate.....ALN
 Resistive Film.....Thick Film
 TabAg
 Protection.....Epoxy
 Tab Attachment
Braze with Epoxy Encapsulation
 Mounting FlangeCu plated with Ni
 Resistance.....50 Ω
 Tolerance.....±5 %
 Packaging100 pcs./tray


Absolute Ratings

Power.....60 W
 Frequency4.0 GHz
 VSWR.....1.2 Maximum

Characteristic Curve

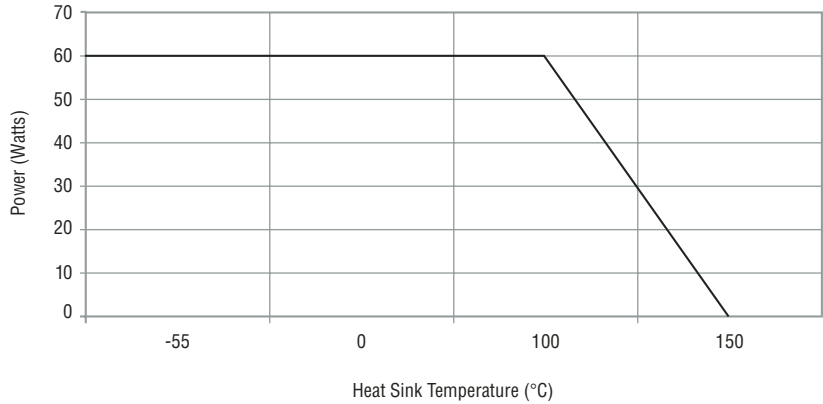

Product Dimensions

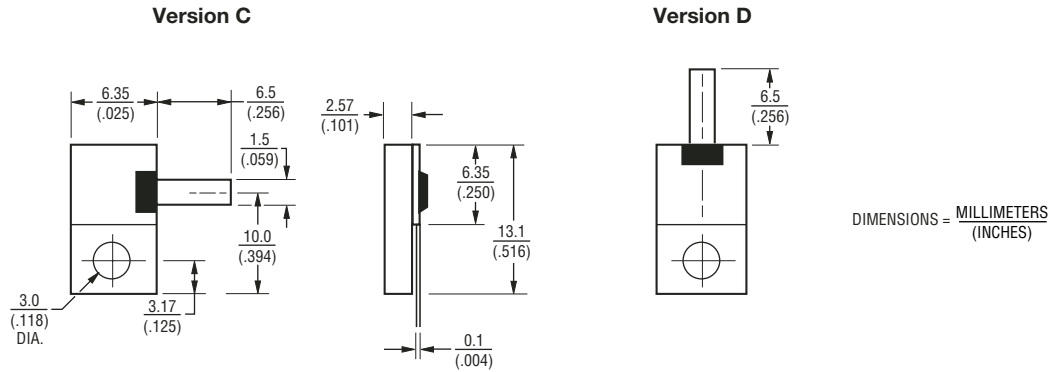

How To Order

CHF 5225 C N F 500 L

Model _____
 Size _____
 Version _____
 Substrate _____
 Mount _____
 F = Flange
 Value _____
 500 = 50 Ohm
 Function _____
 L = Termination



Reliable Electronic Solutions

Asia-Pacific:
 Tel: +886-2 2562-4117
 Fax: +886-2 2562-4116

Europe:
 Tel: +41-41 768 5555
 Fax: +41-41 768 5510

The Americas:
 Tel: +1-951 781-5500
 Fax: +1-951 781-5700

www.bourns.com

*RoHS Directive 2002/95/EC Jan 27 2003, including Annex
 Specifications are subject to change without notice.
 Customers should verify actual device performance in their specific applications.