

CMSH1-20  
 CMSH1-40  
 CMSH1-60  
**NEW**  
 CMSH1-100

**SCHOTTKY BARRIER RECTIFIER**  
**1.0 AMP, 20 THRU 100 VOLTS**



**SMB CASE**

**FEATURES:**

- LOW COST
- SUPERIOR LOT TO LOT CONSISTENCY
- HIGH RELIABILITY
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD
- SPECIAL SELECTIONS AVAILABLE

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 1.0 Amp Surface Mount Silicon Schottky Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications. To order devices on 12mm Tape and Reel (3000/13" Reel), add TR13 suffix to part number.

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)


		CMSH1 -20	CMSH1 -40	CMSH1 -60	CMSH1 -100	UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$	20	40	60	100	V
DC Blocking Voltage	$V_R$	20	40	60	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	14	28	42	70	V
Average Forward Current ( $T_A=75^\circ\text{C}$ )	$I_O$			1.0		A
Peak Forward Surge Current (8.3ms)	$I_{FSM}$			30		A
Operating and Storage						
Junction Temperature	$T_J, T_{stg}$		-65 to +150			$^\circ\text{C}$
Thermal Resistance	$\theta_{JL}$		20			$^\circ\text{C/W}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$V_F$	$I_F=1.0\text{A}$ (CMSH1-20 AND CMSH1-40)			0.55	V
$V_F$	$I_F=1.0\text{A}$ (CMSH1-60)			0.70	V
$V_F$	$I_F=1.0\text{A}$ (CMSH1-100)			0.85	V
$I_R$	$V_R=\text{Rated } V_{RRM}$			0.50	mA
$I_R$	$V_R=\text{Rated } V_{RRM}, T_A=125^\circ\text{C}$			20	mA

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
C <sub>J</sub>	V <sub>R</sub> =4.0V, f=1.0MHz, (CMSH1-20 AND CMSH1-40)		110		pF
C <sub>J</sub>	V <sub>R</sub> =4.0V, f=1.0MHz, (CMSH1-60)		80		pF
C <sub>J</sub>	V <sub>R</sub> =4.0V, f=1.0MHz, (CMSH1-100)		50		pF

All dimensions in inches (mm).

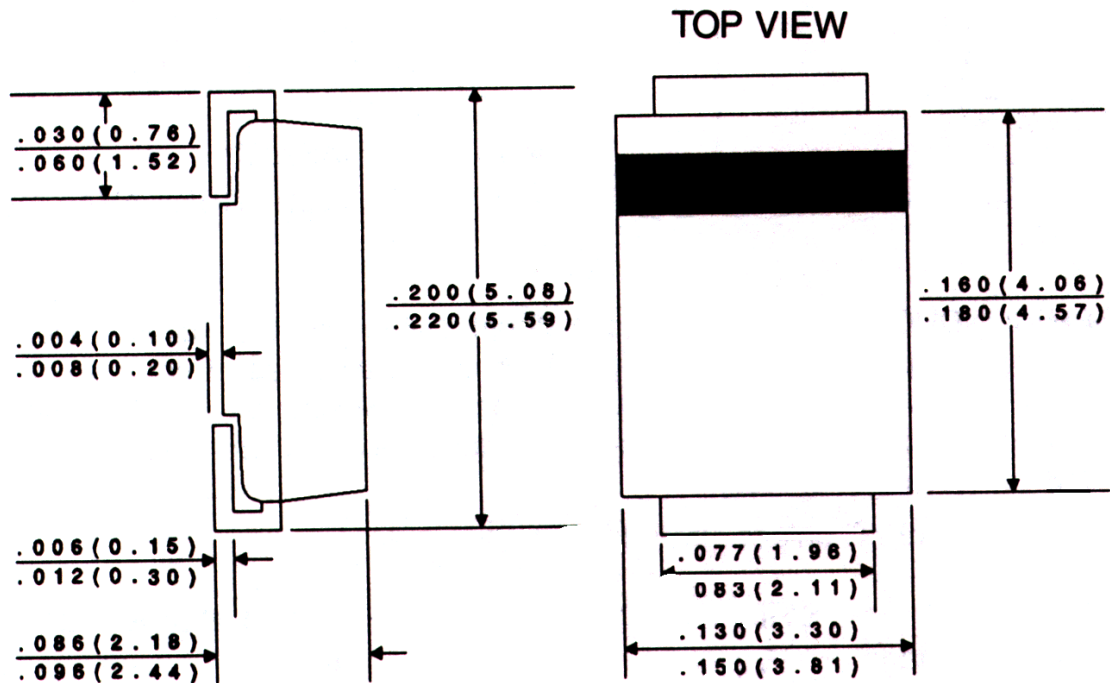

**Marking Codes:**

DEVICE	MARKING CODE
CMSH1-20	CS20
CMSH1-40	CS40
CMSH1-60	CS60
CMSH1-100	CS100