

# FU-427SDF


## 1.3 $\mu\text{m}$ DFB-LD MODULE WITH SINGLEMODE FIBER PIGTAIL

### DESCRIPTION

Module type FU-427SDF has been developed for coupling a singlemode optical fiber and a 1.3  $\mu\text{m}$  wavelength InGaAsP DFB LD (Laser diode). FU-427SDF is suitable to light source for high-speed short haul and long haul digital optical communication systems.

### FEATURES

- MQW-DFB laser diode module
- High-speed response
- Emission wavelength is in 1.3 $\mu\text{m}$  band

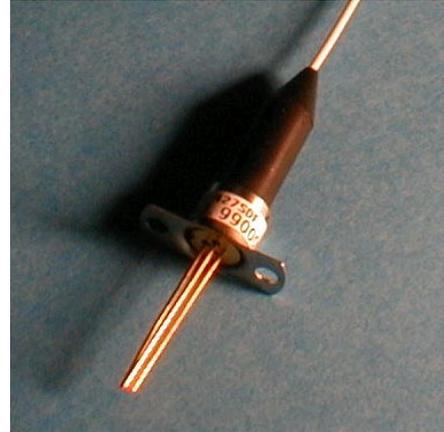

### APPLICATION

High-speed short haul and long haul digital optical communication systems.

### ABSOLUTE MAXIMUM RATINGS (T<sub>c</sub>=25°C)

Parameter		Symbol	Conditions	Rating	Unit
Laser diode	Optical output power from fiber end	Pf	CW	3	mW
	Reverse voltage	Vrl	-	2	V
Photodiode for monitoring	Reverse voltage	Vrd	-	15	V
	Forward current	Ifd	-	2	mA
Operating case temperature		Tc	-	0~+85	°C
Storage temperature		Tstg	-	-40~+85	°C

**MITSUBISHI (OPTICAL DEVICES)**  
**FU-427SDF**

**1.3  $\mu\text{m}$  DFB-LD MODULE WITH SINGLEMODE FIBER PIGTAIL**

**ELECTRICAL/OPTICAL CHARACTERISTICS** (Tc=25°C, unless otherwise noted)

Parameter	Symbol	Test Conditions	Limits			Unit
			Min.	Typ.	Max.	
Threshold current	I <sub>th</sub>	CW	-	15	40	mA
Operating current	I <sub>op</sub>	CW	-	38	90	mA
Operating Voltage	V <sub>op</sub>	CW, I <sub>f</sub> =I <sub>op</sub> (Note 1)	-	1.2	1.6	V
Optical output power from fiber end	P <sub>f</sub>	CW, I <sub>f</sub> =I <sub>op</sub>	2	-	-	mW
Center wavelength	$\lambda_c$	CW, I <sub>f</sub> =I <sub>op</sub>	1290	1310	1330	nm
Side mode suppression ratio	SMSR	CW, I <sub>f</sub> =I <sub>op</sub>	30	35	-	dB
Rise and fall times	t <sub>r</sub> , t <sub>f</sub>	I <sub>b</sub> =I <sub>th</sub> , 10~90% (Note 2)	-	0.3	-	ns
Tracking error (Note 3)	E <sub>r</sub>	T <sub>c</sub> =0~+85°C, APC	-	0.5	-	dB
Differential efficiency	$\eta$	-	-	0.08	-	mW/mA
Monitor current	I <sub>mon</sub>	CW, I <sub>f</sub> =I <sub>op</sub> , V <sub>rd</sub> =5V	0.1	0.5	-	mA
Dark current (Photodiode)	I <sub>d</sub>	V <sub>RD</sub> =5V	-	0.1	0.5	$\mu\text{A}$
Capacitance (Photodiode)	C <sub>t</sub>	V <sub>RD</sub> =5V, f=1MHz	-	-	20	pF

Note 1. I<sub>f</sub> : Forward current (LD)

2. I<sub>b</sub> : Bias current (LD)

3. E<sub>r</sub>=MAX|10×log(P<sub>f</sub>(T<sub>c</sub>)/P<sub>f</sub>(25°C))|

**OPTICAL FIBER SPECIFICATION**


Parameter	Limits	Unit
Type	SM	-
Mode field dia.	9.5±1	$\mu\text{m}$
Cladding dia.	125±2	$\mu\text{m}$
Jacket dia.	0.9 typ.	mm

MITSUBISHI (OPTICAL DEVICES)  
**FU-427SDF**

1.3  $\mu\text{m}$  DFB-LD MODULE WITH SINGLEMODE FIBER PIGTAIL

OUTLINE DIAGRAM

(Unit : mm)

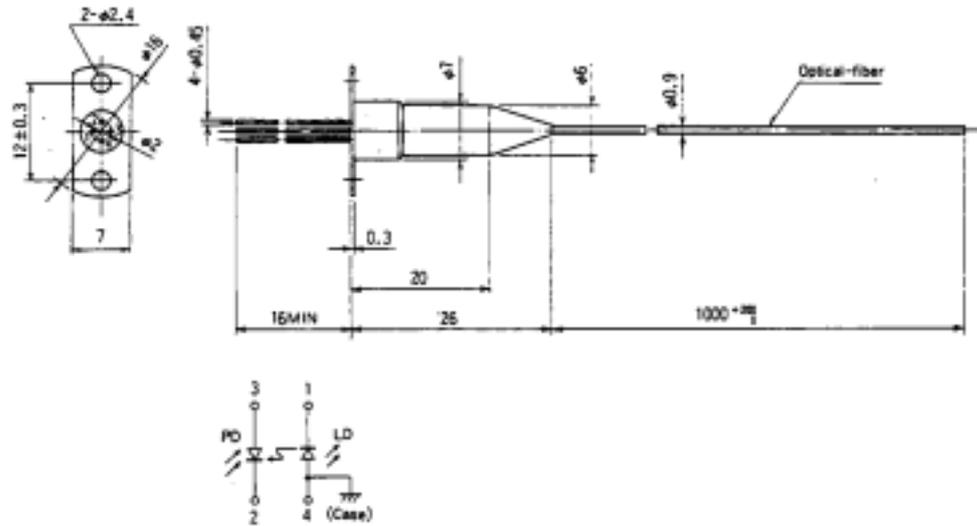

FU-427SDF