


DC/DC Converters

XPiQ inc.

Intelligent Design Quality Product

1 Watt IA Series

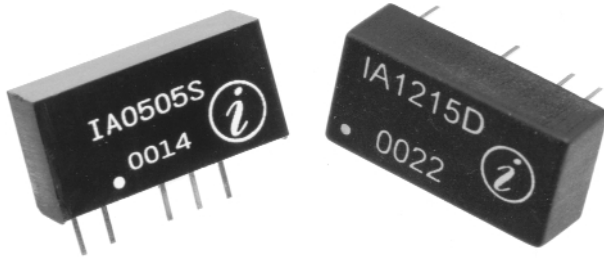

0.18 in² Board Space

80% Efficiency

15 Watts per in³

5, 12, 24 and 48 VDC Inputs

1000 VDC Isolation

Industry Standards Pinouts

Specification

Input

- Input Voltage • $\pm 10\%$
- Input Reflected Noise (20 MHz BW) • 100mV pk-pk max

Output

- Output Voltage Accuracy • $\pm 5\%$
- Output Ripple & Noise (20 MHz BW) • 75 mV pk-pk max
- Line Regulation • 1.2%/1% of V_{in}
- Load Regulation (20% to 100% Load) • $\pm 10\%$

General

- Efficiency • At full load 9V, 12V & 15V outputs
80% typical
At full load 3.3 V & 5 V outputs
70% typical
- Short Circuit Protection • 1 second max

Environmental

- Input Output Isolation • 1000 VDC min
- Temperature Coefficient • 0.03%/°C max
- Operating Temperature Range • -40 °C to +85 °C
- Storage Temperature Range • -55 °C to +125 °C

OUTPUT VOLTAGE & CURRENT RATINGS


IA

Output Voltage(s)	Output Current(s)	5 VDC Input	12 VDC Input	24 VDC Input	48 VDC Input
±3.3 VDC	±150 mA	IA0503	IA1203	IA2403	IA4803
±5.0 VDC	±100 mA	IA0505	IA1205	IA2405	IA4805
±9.0 VDC	±55 mA	IA0509	IA1209	IA2409	IA4809
±12.0 VDC	±42 mA	IA0512	IA1212	IA2412	IA4812
±15.0 VDC	±33 mA	IA0515	IA1215	IA2415	IA4815

Add suffix "S" for single-in-line package, suffix "D" for dual-in-line package.


Mechanical Details

Single-In-Line Package

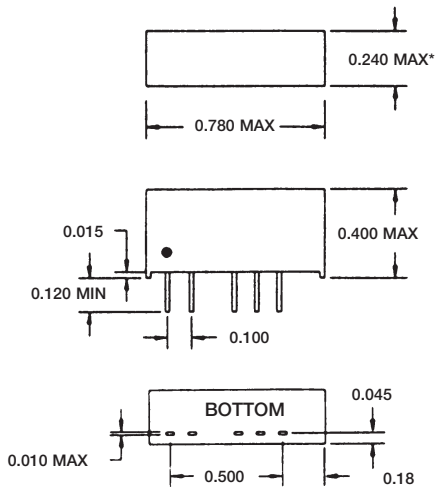



*0.280 for 48 Vin version

Dual-In-Line-Package

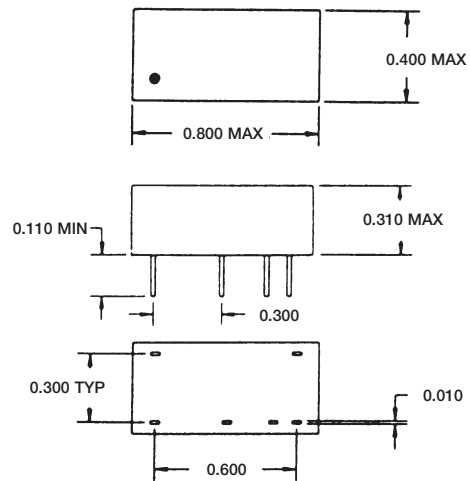

Pins .01 x .02 inches

Pin Connections



Derating Curve

