




HighSpeed 2-Technology

- **Designed for:**
 - TV – Horizontal Line Deflection
- **2nd generation HighSpeed-Technology for 1200V applications offers:**
 - loss reduction in resonant circuits
 - temperature stable behavior
 - parallel switching capability
 - tight parameter distribution
 - E_{off} optimized for $I_C = 3A$
 - simple Gate-Control



P-TO220-3-31
(FullPAK)



P-TO220-3-34
(FullPAK)

- Complete product spectrum and PSpice Models : <http://www.infineon.com/igbt/>

| Type | V_{CE} | I_C | E_{off} | $T_{j,max}$ | Marking | Package | Ordering Code |
|-------------|----------|-------|-----------|-------------|----------|---------------|---------------|
| IGA03N120H2 | 1200V | 3A | 0.15mJ | 150°C | G03H1202 | P-TO-220-3-31 | Q67040-S4648 |
| IGA03N120H2 | 1200V | 3A | 0.15mJ | 150°C | G03H1202 | P-TO-220-3-34 | Q67040-S4654 |

Maximum Ratings

| Parameter | Symbol | Value | Unit |
|--|----------------|------------|------|
| Collector-emitter voltage | V_{CE} | 1200 | V |
| Triangular collector peak current ($V_{GS} = 15V$) $T_C = 100^\circ C, f = 32kHz$ | I_{Cpk} | 8.2 | A |
| Pulsed collector current, t_p limited by $T_{j,max}$ | I_{Cpuls} | 9 | A |
| Turn off safe operating area $V_{CE} \leq 1200V, T_j \leq 150^\circ C$ | - | 9 | A |
| Gate-emitter voltage | V_{GE} | ± 20 | V |
| Power dissipation $T_C = 25^\circ C$ | P_{tot} | 29 | W |
| Operating junction and storage temperature | T_j, T_{stg} | -40...+150 | °C |
| Soldering temperature, 1.6mm (0.063 in.) from case for 10s | - | 260 | °C |

Thermal Resistance

| Parameter | Symbol | Conditions | Max. Value | Unit |
|--|------------|--------------------------------|------------|------|
| Characteristic | | | | |
| IGBT thermal resistance, junction – case | R_{thJC} | | 4.3 | K/W |
| Thermal resistance, junction – ambient | R_{thJA} | P-TO-220-3-31 P-TO-220-3-34 | 64 | |

Electrical Characteristic, at $T_j = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Conditions | Value | | | Unit |
|--|---------------|--|-------|------|------|---------|
| | | | min. | Typ. | max. | |
| Static Characteristic | | | | | | |
| Collector-emitter breakdown voltage | $V_{(BR)CES}$ | $V_{GE}=0V, I_C=300\mu A$ | 1200 | - | - | V |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $V_{GE} = 15V, I_C=3A$ $T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$ | - | 2.2 | 2.8 | |
| | | | - | 2.5 | - | |
| | | | - | 2.4 | - | |
| Gate-emitter threshold voltage | $V_{GE(th)}$ | $I_C=90\mu A, V_{CE}=V_{GE}$ | 2.1 | 3 | 3.9 | |
| Zero gate voltage collector current | I_{CES} | $V_{CE}=1200V, V_{GE}=0V$ $T_j=25^\circ\text{C}$ $T_j=150^\circ\text{C}$ | - | - | 20 | μA |
| | | | - | - | 80 | |
| Gate-emitter leakage current | I_{GES} | $V_{CE}=0V, V_{GE}=20V$ | - | - | 100 | nA |
| Transconductance | g_{fs} | $V_{CE}=20V, I_C=3A$ | - | 2 | - | S |
| Dynamic Characteristic | | | | | | |
| Input capacitance | C_{iss} | $V_{CE}=25V$ $V_{GE}=0V$ $f=1\text{MHz}$ | - | 205 | - | pF |
| Output capacitance | C_{oss} | | - | 24 | - | |
| Reverse transfer capacitance | C_{rfs} | | - | 7 | - | |
| Gate charge | Q_{Gate} | $V_{CC}=960V, I_C=3A$ $V_{GE}=15V$ | - | 8.6 | - | nC |
| Internal emitter inductance measured 5mm (0.197 in.) from case | L_E | P-TO-220-3-31 | - | 7 | - | nH |

Switching Characteristic, Inductive Load, at $T_j=25^\circ\text{C}$

| Parameter | Symbol | Conditions | Value | | | Unit |
|----------------------------|--------------|--|-------|------|------|------|
| | | | min. | Typ. | max. | |
| IGBT Characteristic | | | | | | |
| Turn-on delay time | $t_{d(on)}$ | $T_j=25^\circ\text{C}$ | - | 9.2 | - | ns |
| Rise time | t_r | $V_{CC}=800\text{V}, I_C=3\text{A}$ | - | 5.2 | - | |
| Turn-off delay time | $t_{d(off)}$ | $V_{GE}=0\text{V}/15\text{V}$ | - | 281 | - | |
| Fall time | t_f | $R_G=82\Omega$ | - | 29 | - | |
| Turn-on energy | E_{on} | $L_\sigma^{1)}=180\text{nH}$ | - | 0.14 | - | mJ |
| Turn-off energy | E_{off} | $C_\sigma^{1)}=40\text{pF}$ | - | 0.15 | - | |
| Total switching energy | E_{ts} | Energy losses include "tail" and diode ²⁾ reverse recovery. | - | 0.29 | - | |

Switching Characteristic, Inductive Load, at $T_j=150^\circ\text{C}$

| Parameter | Symbol | Conditions | Value | | | Unit |
|----------------------------|--------------|--|-------|------|------|------|
| | | | min. | Typ. | max. | |
| IGBT Characteristic | | | | | | |
| Turn-on delay time | $t_{d(on)}$ | $T_j=150^\circ\text{C}$ | - | 9.4 | - | ns |
| Rise time | t_r | $V_{CC}=800\text{V}, I_C=3\text{A}$ | - | 6.7 | - | |
| Turn-off delay time | $t_{d(off)}$ | $V_{GE}=0\text{V}/15\text{V}$ | - | 340 | - | |
| Fall time | t_f | $R_G=82\Omega$ | - | 63 | - | |
| Turn-on energy | E_{on} | $L_\sigma^{1)}=180\text{nH}$ | - | 0.22 | - | mJ |
| Turn-off energy | E_{off} | $C_\sigma^{1)}=40\text{pF}$ | - | 0.26 | - | |
| Total switching energy | E_{ts} | Energy losses include "tail" and diode ²⁾ reverse recovery. | - | 0.48 | - | |

Switching Energy ZVT, Inductive Load

| Parameter | Symbol | Conditions | Value | | | Unit |
|----------------------------|-----------|-------------------------------------|-------|------|------|------|
| | | | min. | typ. | max. | |
| IGBT Characteristic | | | | | | |
| Turn-off energy | E_{off} | $V_{CC}=800\text{V}, I_C=3\text{A}$ | | | | mJ |
| | | $V_{GE}=0\text{V}/15\text{V}$ | | | | |
| | | $R_G=82\Omega, C_r^{1)}=4\text{nF}$ | | | | |
| | | $T_j=25^\circ\text{C}$ | - | 0.05 | - | |
| | | $T_j=150^\circ\text{C}$ | - | 0.09 | - | |

¹⁾ Leakage inductance L_σ and stray capacity C_σ due to dynamic test circuit in figure E

²⁾ Commutation diode from device IKP03N120H2

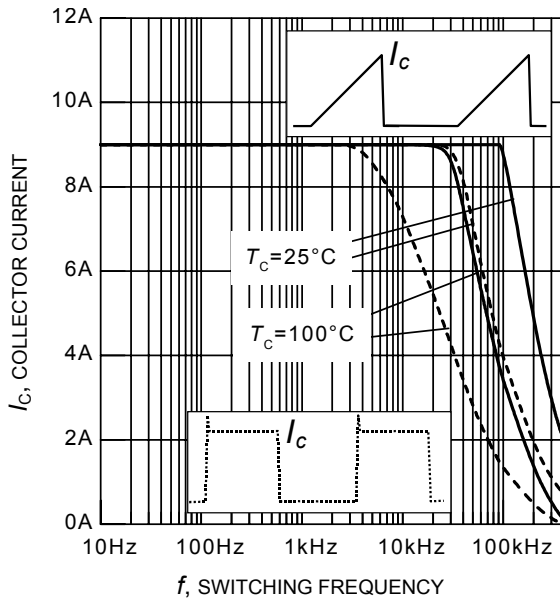


Figure 1. Collector current as a function of switching frequency
 ($T_j \leq 150^\circ\text{C}$, $D = 0.5$, $V_{CE} = 800\text{V}$,
 $V_{GE} = +15\text{V}/0\text{V}$, $R_G = 82\Omega$)

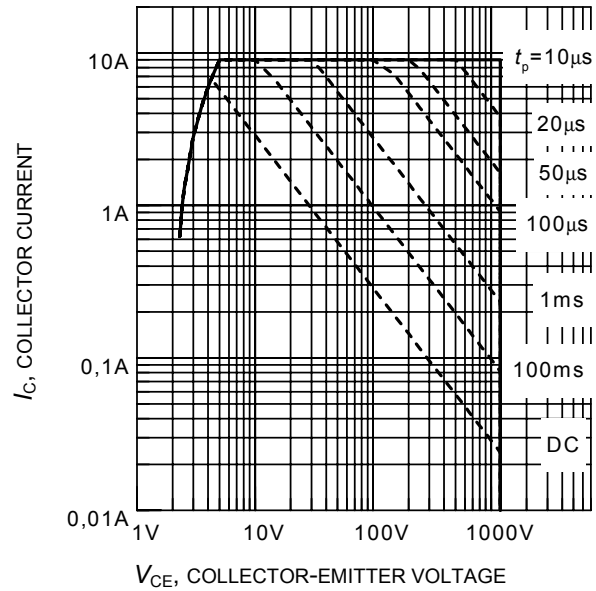


Figure 2. Safe operating area
 ($D = 0$, $T_C = 25^\circ\text{C}$, $T_j \leq 150^\circ\text{C}$)

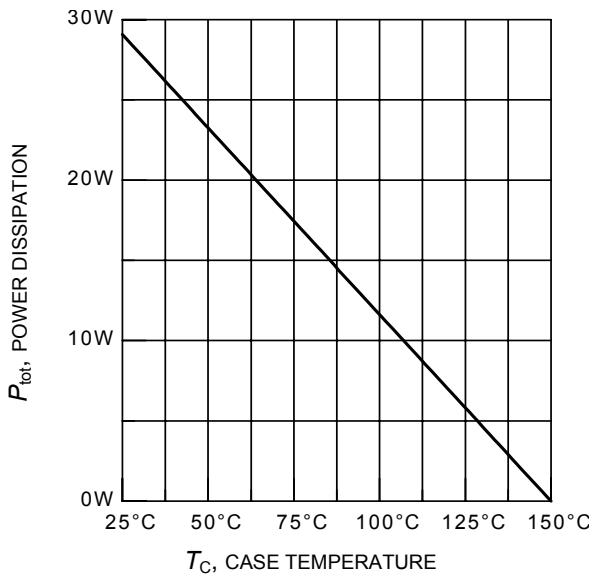


Figure 3. Power dissipation as a function of case temperature
 ($T_j \leq 150^\circ\text{C}$)

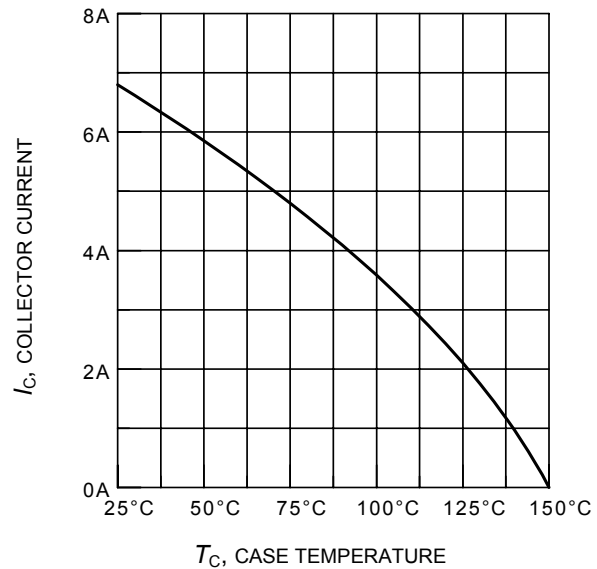


Figure 4. Collector current as a function of case temperature
 ($V_{GE} \leq 15\text{V}$, $T_j \leq 150^\circ\text{C}$)

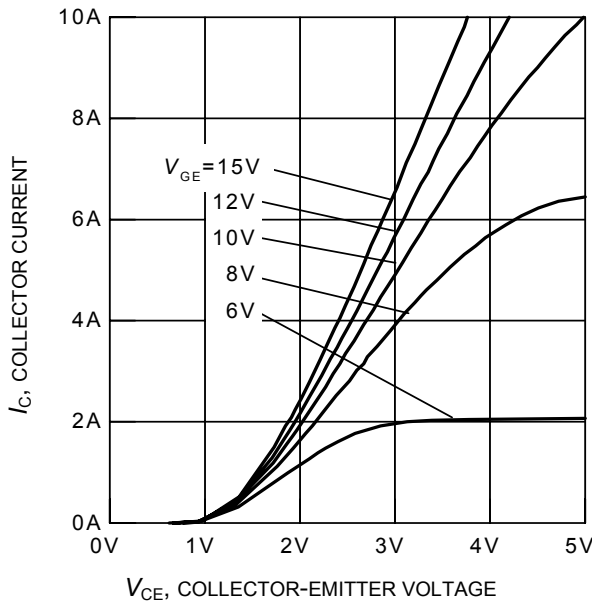


Figure 5. Typical output characteristics
($T_j = 25^\circ\text{C}$)

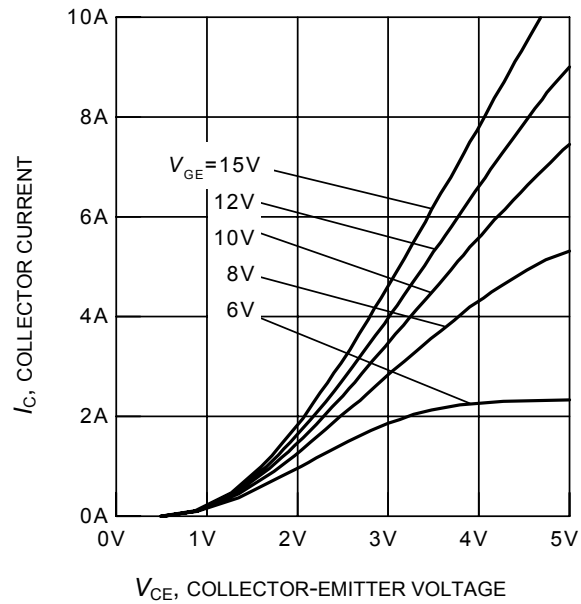


Figure 6. Typical output characteristics
($T_j = 150^\circ\text{C}$)

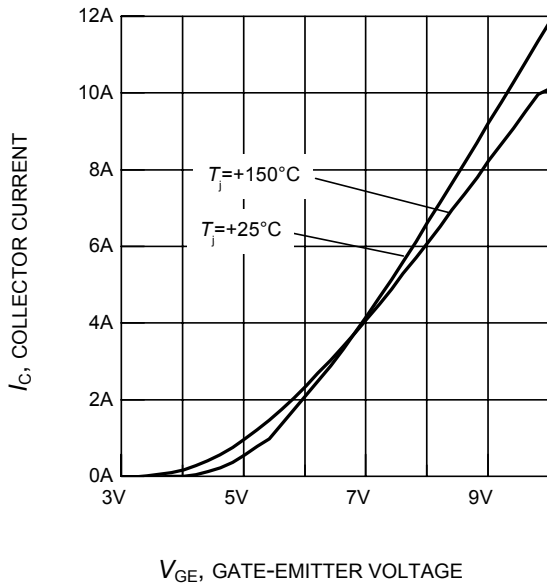


Figure 7. Typical transfer characteristics
($V_{CE} = 20\text{V}$)


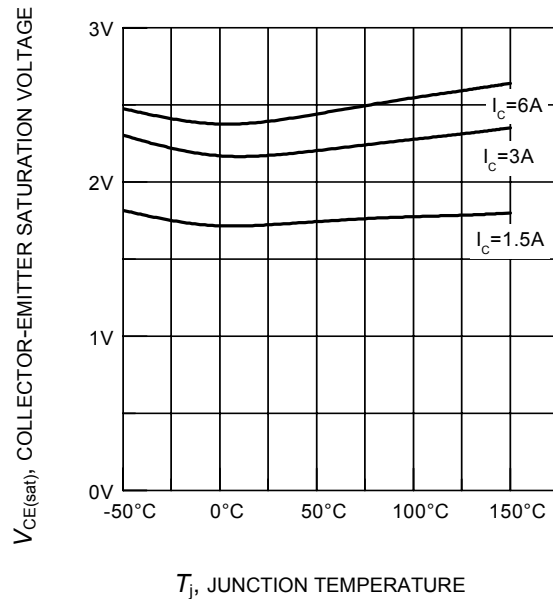



Figure 8. Typical collector-emitter saturation voltage as a function of junction temperature
($V_{GE} = 15\text{V}$)

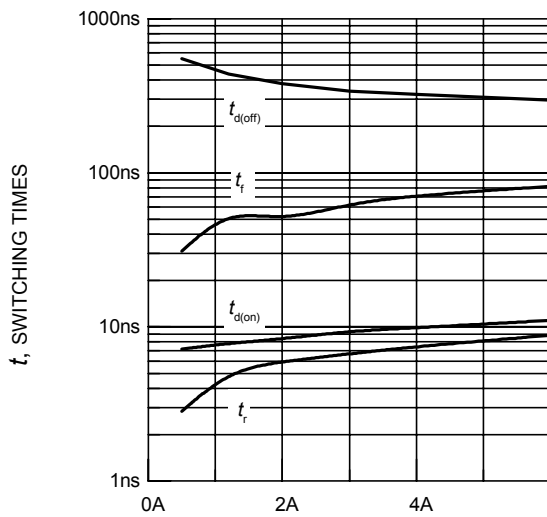

I_C , COLLECTOR CURRENT

Figure 9. Typical switching times as a function of collector current


(inductive load, $T_j = 150^\circ\text{C}$, $V_{CE} = 800\text{V}$, $V_{GE} = +15\text{V}/0\text{V}$, $R_G = 82\Omega$, dynamic test circuit in Fig.E)

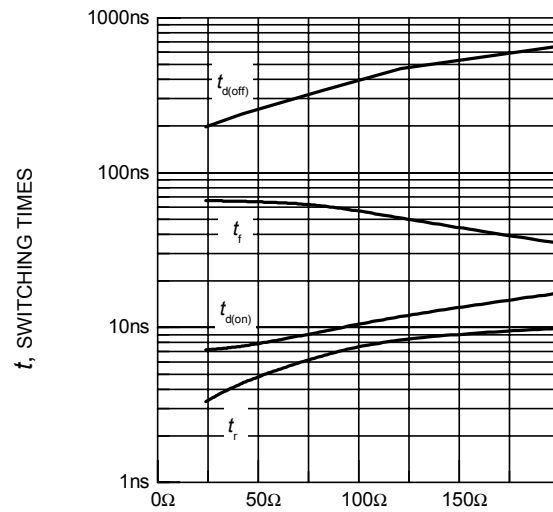

R_G , GATE RESISTOR

Figure 10. Typical switching times as a function of gate resistor


(inductive load, $T_j = 150^\circ\text{C}$, $V_{CE} = 800\text{V}$, $V_{GE} = +15\text{V}/0\text{V}$, $I_C = 3\text{A}$, dynamic test circuit in Fig.E)

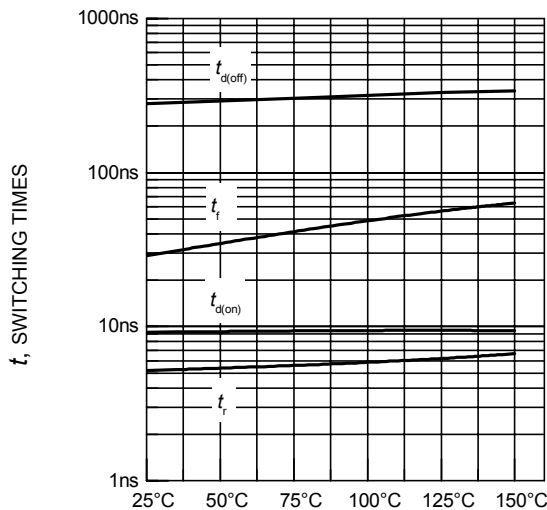

T_j , JUNCTION TEMPERATURE

Figure 11. Typical switching times as a function of junction temperature


(inductive load, $V_{CE} = 800\text{V}$, $V_{GE} = +15\text{V}/0\text{V}$, $I_C = 3\text{A}$, $R_G = 82\Omega$, dynamic test circuit in Fig.E)

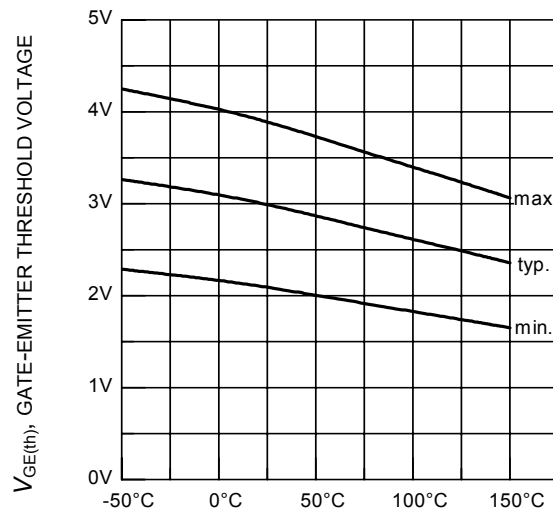

T_j , JUNCTION TEMPERATURE

Figure 12. Gate-emitter threshold voltage as a function of junction temperature


($I_C = 0.09\text{mA}$)

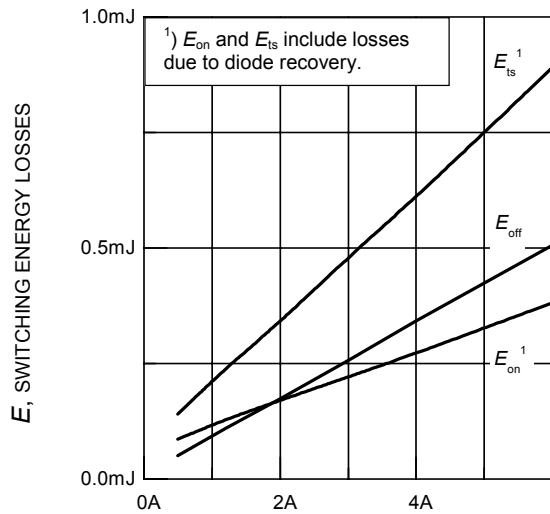

I_C , COLLECTOR CURRENT

Figure 13. Typical switching energy losses as a function of collector current


(inductive load, $T_j = 150^\circ\text{C}$, $V_{CE} = 800\text{V}$, $V_{GE} = +15\text{V}/0\text{V}$, $R_G = 82\Omega$, dynamic test circuit in Fig.E)

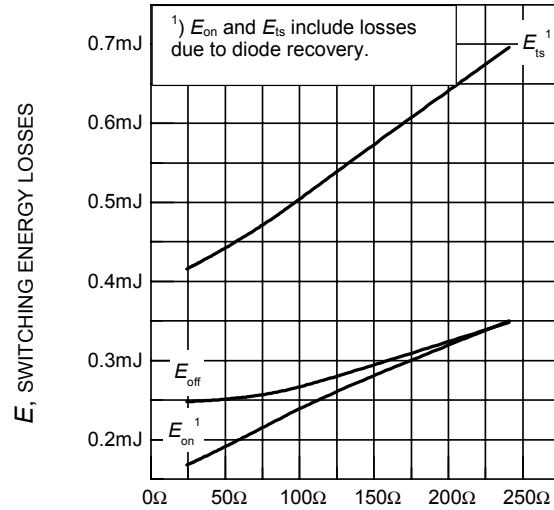

R_G , GATE RESISTOR

Figure 14. Typical switching energy losses as a function of gate resistor


(inductive load, $T_j = 150^\circ\text{C}$, $V_{CE} = 800\text{V}$, $V_{GE} = +15\text{V}/0\text{V}$, $I_C = 3\text{A}$, dynamic test circuit in Fig.E)

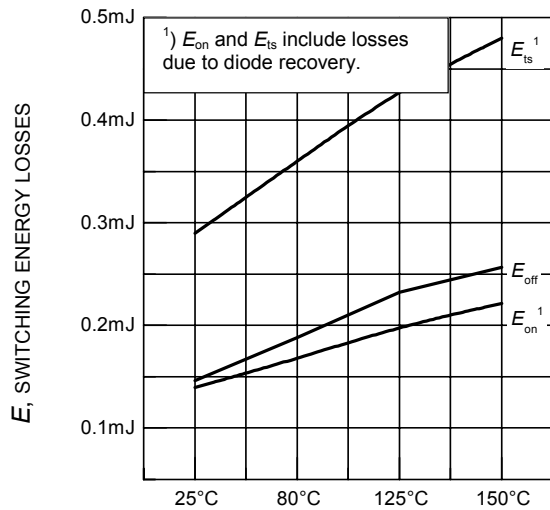

T_j , JUNCTION TEMPERATURE

Figure 15. Typical switching energy losses as a function of junction temperature


(inductive load, $V_{CE} = 800\text{V}$, $V_{GE} = +15\text{V}/0\text{V}$, $I_C = 3\text{A}$, $R_G = 82\Omega$, dynamic test circuit in Fig.E)

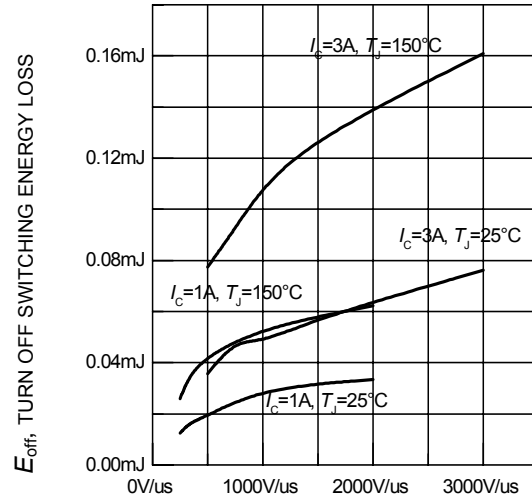


dv/dt , VOLTAGE SLOPE

Figure 16. Typical turn off switching energy loss for soft switching

(dynamic test circuit in Fig. E)

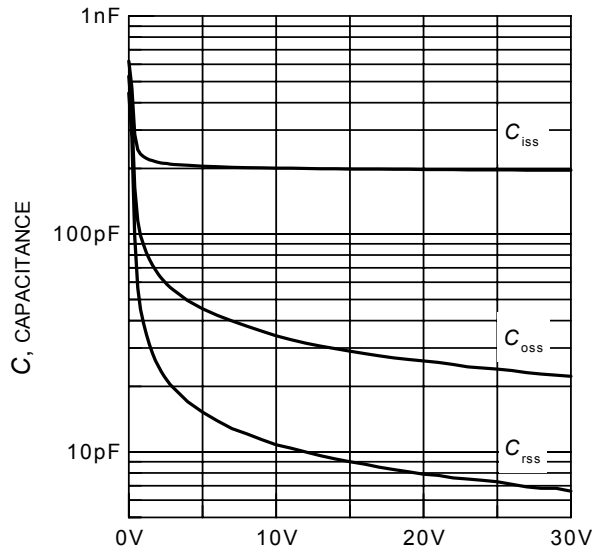

V_{CE} , COLLECTOR-EMITTER VOLTAGE
Figure 19. Typical capacitance as a function of collector-emitter voltage
 ($V_{GE} = 0V, f = 1MHz$)

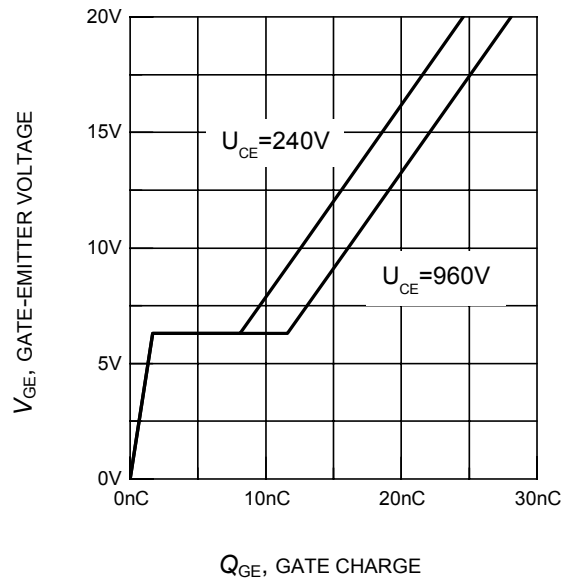

Q_{GE} , GATE CHARGE
Figure 18. Typical gate charge
 ($I_C = 3A$)


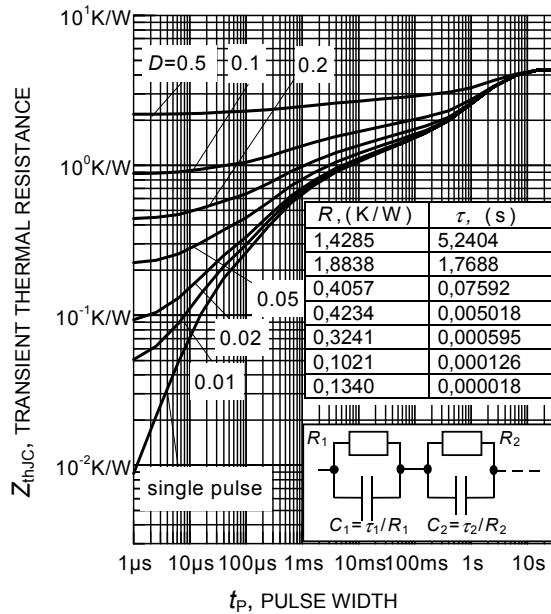



Figure 17. IGBT transient thermal impedance as a function of pulse width
 ($D=t_p/T$)

TO-220-3-31 (FullPAK)

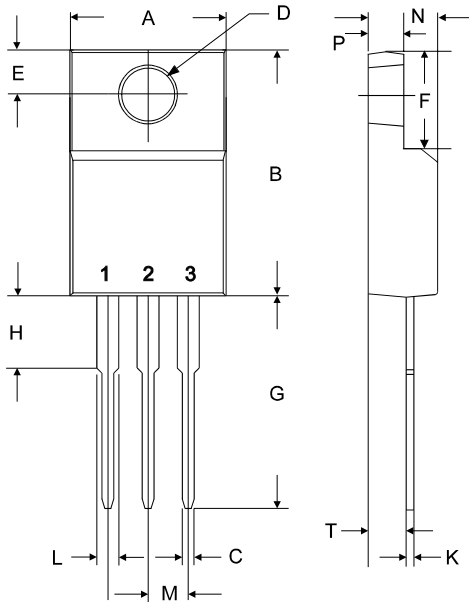

| symbol | dimensions | | | |
|--------|------------|-------|-------------|--------|
| | [mm] | | [inch] | |
| | min | max | min | max |
| A | 10.37 | 10.63 | 0.4084 | 0.4184 |
| B | 15.86 | 16.12 | 0.6245 | 0.6345 |
| C | 0.65 | 0.78 | 0.0256 | 0.0306 |
| D | 2.95 typ. | | 0.1160 typ. | |
| E | 3.15 | 3.25 | 0.124 | 0.128 |
| F | 6.05 | 6.56 | 0.2384 | 0.2584 |
| G | 13.47 | 13.73 | 0.5304 | 0.5404 |
| H | 3.18 | 3.43 | 0.125 | 0.135 |
| K | 0.45 | 0.63 | 0.0177 | 0.0247 |
| L | 1.23 | 1.36 | 0.0484 | 0.0534 |
| M | 2.54 typ. | | 0.100 typ. | |
| N | 4.57 | 4.83 | 0.1800 | 0.1900 |
| P | 2.57 | 2.83 | 0.1013 | 0.1113 |
| T | 2.51 | 2.62 | 0.0990 | 0.1030 |

TO-220-3-34 (FullPAK)

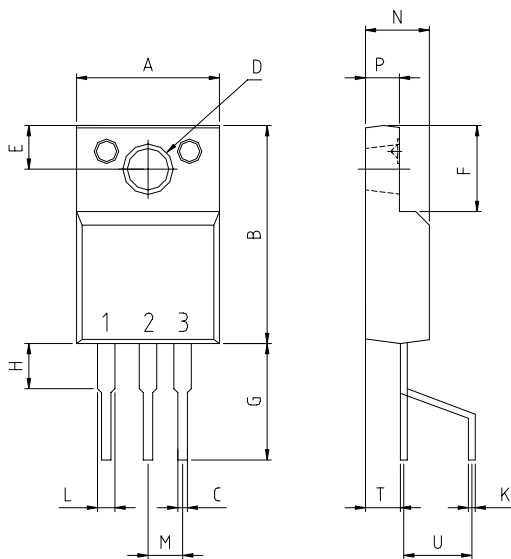

| symbol | dimensions | | | |
|--------|------------|-------|-------------|--------|
| | [mm] | | [inch] | |
| | min | max | min | max |
| A | 10.37 | 10.63 | 0.4084 | 0.4184 |
| B | 15.86 | 16.12 | 0.6245 | 0.6345 |
| C | 0.65 | 0.78 | 0.0256 | 0.0306 |
| D | 2.95 typ. | | 0.1160 typ. | |
| E | 3.15 | 3.25 | 0.124 | 0.128 |
| F | 6.05 | 6.56 | 0.2384 | 0.2584 |
| G | 8.28 | 8.79 | 0.326 | 0.346 |
| H | 3.18 | 3.43 | 0.125 | 0.135 |
| K | 0.45 | 0.63 | 0.0177 | 0.0247 |
| L | 1.23 | 1.36 | 0.0484 | 0.0534 |
| M | 2.54 typ. | | 0.100 typ. | |
| N | 4.57 | 4.83 | 0.1800 | 0.1900 |
| P | 2.57 | 2.83 | 0.1013 | 0.1113 |
| T | 2.51 | 2.62 | 0.0990 | 0.1030 |
| U | 5.00 typ. | | 0.197 typ. | |

- 1: Gate
- 2: Collector
- 3: Emitter

Published by
Infineon Technologies AG i Gr.,
Bereich Kommunikation
St.-Martin-Strasse 53,
D-81541 München
© Infineon Technologies AG 1999
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.