


K3100G Series

14 pin DIP, 5.0 Volt, Clock Oscillator



**THIS PRODUCT IS NOT RECOMMENDED FOR NEW DESIGNS.
PLEASE REFER TO THE MHO3 PRODUCT SERIES.**

- ♦ TTL/CMOS Compatible
Tight Symmetry (45/55%) Available
- ♦ Tri-State Option Available
- ♦ ±100ppm Stability Standard - K3100GC
Tighter Stabilities Available
±25ppm Stability:- K3100GA
±50ppm Stability:- K3100GB
- ♦ Case Ground for EMI Protection

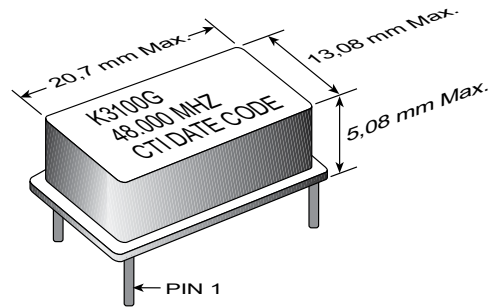

ELECTRICAL SPECIFICATIONS			
MODEL	K3100GA	K3100GB	K3100GC
Frequency Range (MHz)	1.0 to 125		
Frequency Stability (ppm)	Inclusive of calibration, temperature, voltage, load, shock, vibration, aging		
Overall	Inclusive of calibration, temperature, voltage, load, shock, vibration, aging		
0°C to 70°C	±25	±50	±100
-40°C to 85°C	N/A	±50	±100
Temperature Range (°C)	-40°C to +85°C		
Operating	-40°C to +85°C		
Storage	-55°C to +125°C		
Supply Voltage (V)	+3.3 ±5%		
Supply Current (mA)	<30		
Output CMOS	0.9 V _{CC}		
"0" Level (V _{OL})	0.1 V _{CC}		
"1" Level (V _{OH})	Up to 80MHz 50pF; >80MHz 30pF		
Load	<10		
T _R & T _F (ns)	40/60		
Symmetry (%)	10ps RMS @ 100MHz		
Jitter (Typical)	<10		
Start up Time (ms)	<10		

PART NUMBERING GUIDE	
K3100GXXXX - Specify Frequency	
	→ "Blank" = Fixed Frequency
	→ "E" = Tri-State
	→ "Blank" = 0°C to 70°C Operating Temperature
	→ "M" = -40°C to 85°C Operating Temperature
	→ "Blank" = 40/60% Symmetry
	→ "S" = 45/55 Symmetry
	→ "A" ±25ppm Frequency Stability (Available 0/70°C only)
	→ "B" = ±50 ppm Frequency Stability
	→ "C" = ±100ppm Frequency Stability

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.


Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

K3100G Series

14 pin DIP, 5.0 Volt, Clock Oscillator




**THIS PRODUCT IS NOT RECOMMENDED FOR NEW DESIGNS.
PLEASE REFER TO THE MHO3 PRODUCT SERIES.**

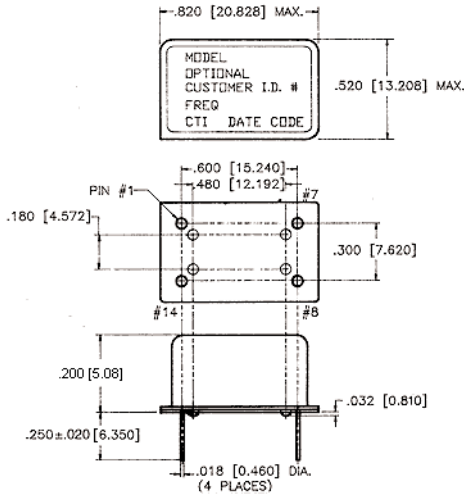


PIN	FUNCTION
1	N/C / Tri-State
7	Ground
8	Output
14	+ V _{CC}

SHIPPING TUBE CROSS SECTION

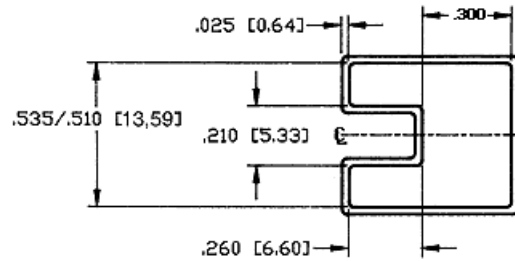


ALL DIMENSIONS ARE INSIDE

OUTPUT WAVEFORM

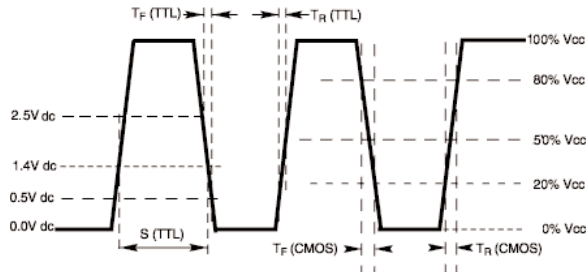

TEST CIRCUIT DIAGRAM

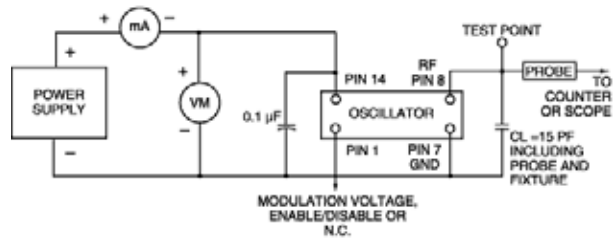

MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS

TEST METHODS	REFERENCE PROCEDURES	DESCRIPTION
Temperature Cycle	MIL-STD-833, Mtd 1010, Cond. B	-55°C to +125°C; Air-to-Air; 100 cycles; 10 min. dwell
Mechanical Shock	MIL-STD-883, Mtd 2002, Cond. B	1500 g's
Vibration	MIL-STD 883, Mtd 2007, Cond. B	20-2000 Hz; 0.06 inch; 15g's; 3 planes
Humidity Steady State	MIL-STD-202, Mtd 103	40°C; 90%-95% R.H.; 56 days
Thermal Shock	MIL-STD-883, Mtd 1011.7 Cond. B	100°C to 0°C; Water-to-Water; 15 cycles
Electrostatic Discharge	MIL-STD-883, Mtd 3015 Class II	2 KV to 4 KV Threshold
Solderability	MIL-STD-883, Mtd 2022.2	Solder dip; Meniscograph Criteria
Hermeticity	MIL-STD-883, Mtd 1014.8, Cond. A1	Mass spectro. 2 x 10 ⁻⁸ atmos. CC/sec He
Resistance to Soldering	MIL-STD-202, Mtd 210D, Cond. J	235°C; 30 seconds
Lead Integrity	MIL-STD-883, Mtd 2004.5, Cond. A, B1	Lead tension & bend stress
Marking Permanence	MIL-STD-883, Mtd 2015.8	Resistance to solvents
Life Test	MIL-STD-883, Mtd 1005.6	125°C, powered, 1000 hours minimum

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.