

KBL005 ...KBL10

4.0A SINGLE - PHASE SILICON BRIDGE

Features


- Ideal for printed circuit board
- Surge overload rating - 200 amperes peak
- Mounting Position: Any
- Leads: Silver-plated copper
- Plastic material has Underwriters Laboratory Flammability Classification 94V-0.
- U/L recognized file # 142814

VOLTAGE RANGE

50 to 1000 Volts

CURRENT

4.0 Amperes

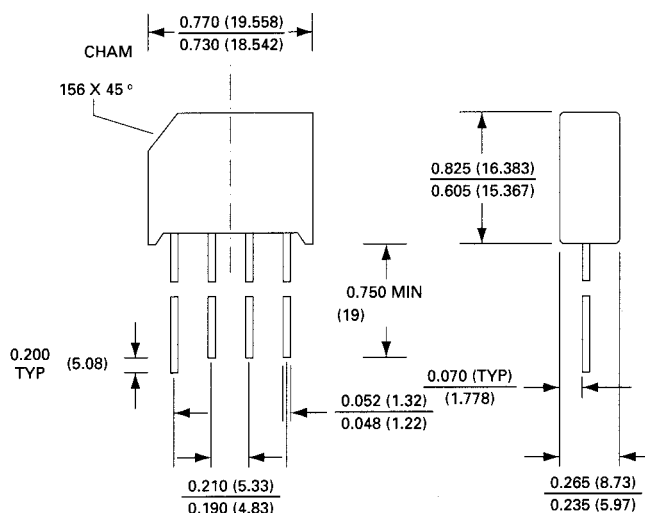

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

| | KBL005 | KBL01 | KBL02 | KBL04 | KBL06 | KBL08 | KBL10 | UNITS |
|---|--------------|-------|-------|-------|-------|-------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS Bridge Input Voltage | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Rectified Output Current at 50 °C T _A (Note 1) | 4.0 | | | | | | | A |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load | 200 | | | | | | | A |
| Maximum Forward Voltage Drop per Bridge Element at 3A Peak | 1.0 | | | | | | | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage | 10 | | | | | | | μA |
| Maximum Reverse Current at Rated DC Blocking Voltage and 150° T _A | 1.0 | | | | | | | mA |
| Operating and storage temperature Range, T _A | -55 to + 150 | | | | | | | °C |

NOTES: (1) Mounting conditions. 0.5" lead length maximum.



SEMTECH ELECTRONICS LTD.

(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)








KBL005 ...KBL10

4.0A SINGLE - PHASE SILICON BRIDGE

RATING AND CHARACTERISTICS CURVES

KBL005 SERIES

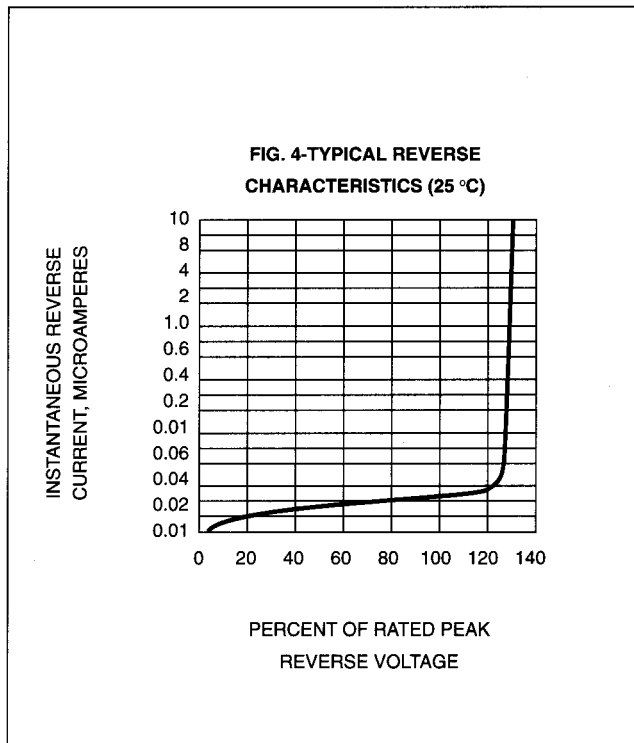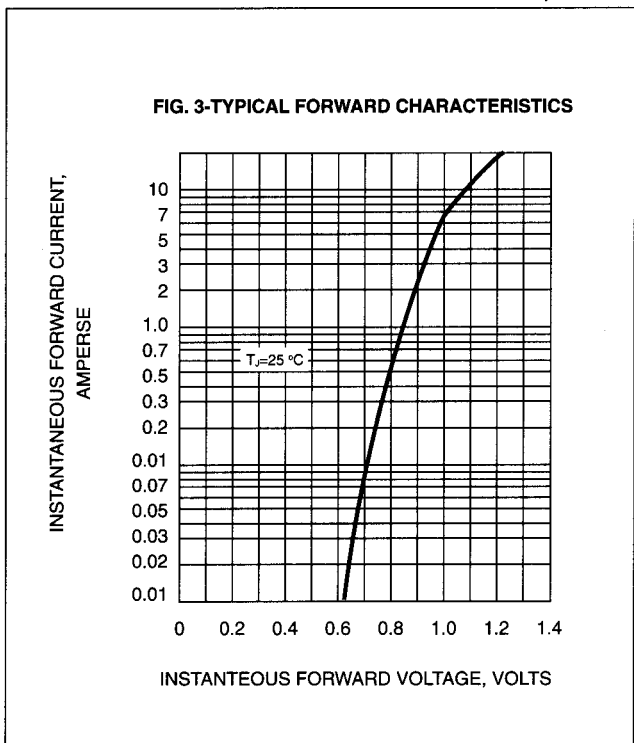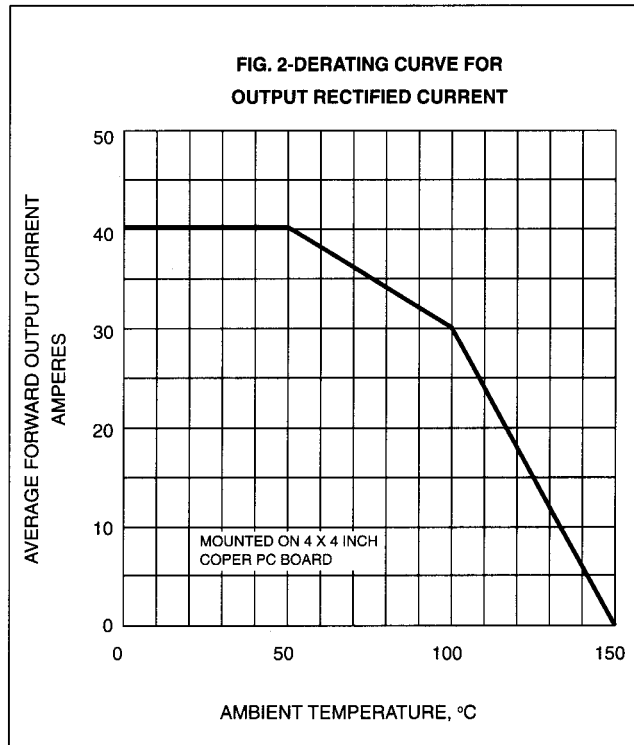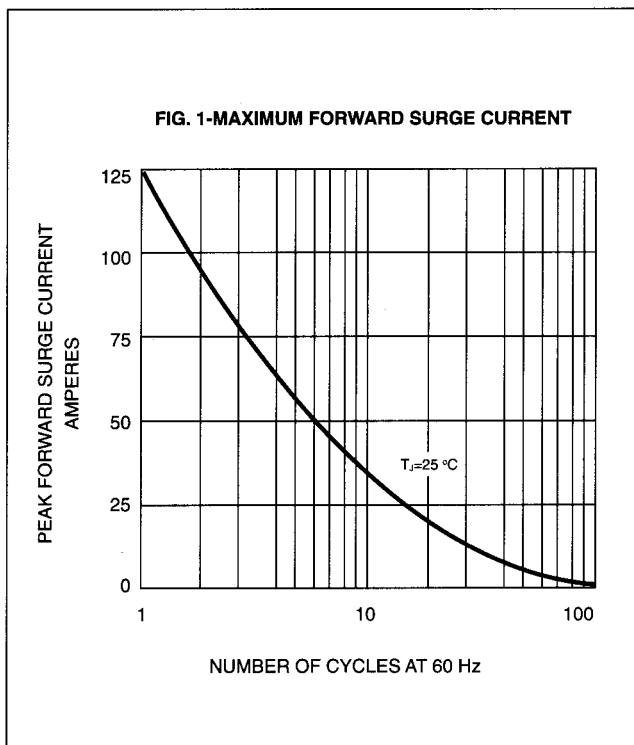

SEMTECH ELECTRONICS LTD.
 (wholly owned subsidiary of HONEY TECHNOLOGY LTD.)

