

**KVR133X64C2/256**  
**256MB 32M x 64-Bit PC133**  
**CL2 168-Pin DIMM Module**


**DESCRIPTION:**

This document describes ValueRAM's 32M x 64-bit (256MB) CL2 SDRAM (Synchronous DRAM) PC133 DIMM module. The components on this module include eight 32M x 8-bit (8M x 8-bit x 4 Bank) PC133 SDRAM in TSOP packages. This 168-pin DIMM uses gold contact fingers and requires +3.3V. The electrical and mechanical specifications are as follows:

**FEATURES:**

- ✓ CLK Cycle Time (tCC) min. = 7.5ns (CAS Latency = 2) / max. = 1000ns
- ✓ Row Cycle Time (tRC) 60ns
- ✓ CLK to Output (tSAC) max. = 5.4ns (CAS Latency = 2)
- ✓ Single Power Supply of +3.3V (+/- .3V)
- ✓ Power 2.640 W (operating)
- ✓ UL Rating 94 V - 0

**Note:** The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.375" (34.92mm).

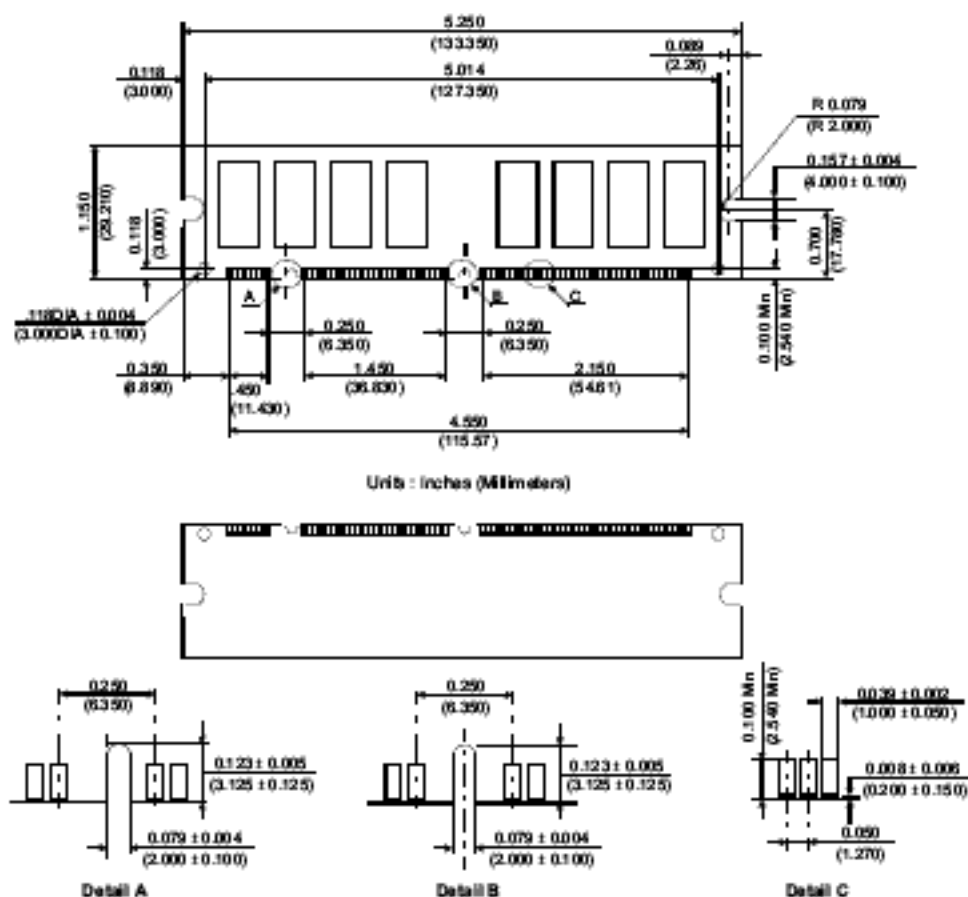

*Figure 1: KVR133X64C2/256 168-Pin SDRAM Module*