


MR11 Halogen Lamps with Dichroic Reflectors

Line No.	Part No.	Volts	Watts	Color Temp.		Life Hours	Burning Position	Filament Type	Beam Angle	Dimensions		Base Type	Drawing
				Degrees Kelvin	Kelvin					D	MOL		
1	L518	6.0	10	2,925	2,925	2,000	Any	C-6	11°	36.0	35.0	GZ4	A
2	L524	6.0	20	2,925	2,925	2,000	Any	C-6	10°	36.0	35.0	GZ4	A
3	L517A	12.0	12	2,925	2,925	2,000	Any	C-6	8°	36.0	35.0	GZ4	A
4	L519	12.0	20	2,925	2,925	2,000	Any	C-6	11°	36.0	35.0	GZ4	A
5	L514	12.0	35	2,950	2,950	2,000	Any	C-6	12°	36.0	35.0	GZ4	A
6	L526	24.0	20	2,925	2,925	2,000	Any	CC-6	15°	36.0	35.0	GZ4	A



Recommended Holders/Sockets Pages 28 & 29. Add -CG to part number for Cover Glass.

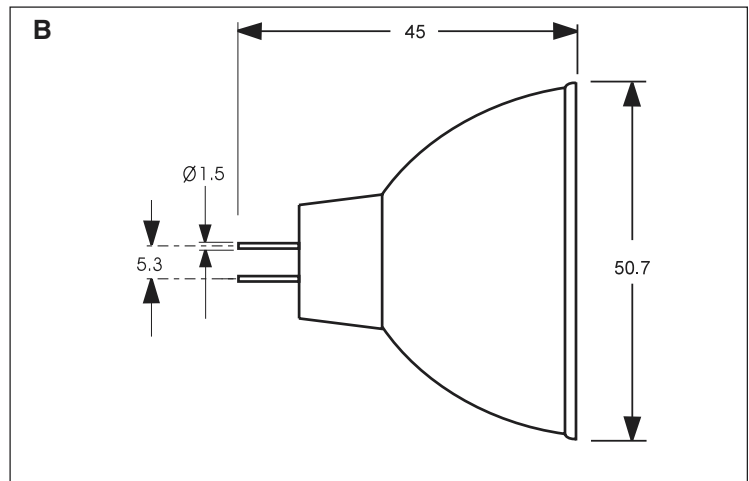

MR16 Halogen Lamps with Dichroic Reflectors

Line No.	Part No.	Volts	Watts	Color Temp.		Life Hours	Burning Position	Filament Type	Beam Angle	Dimensions		Base Type	Drawing
				Degrees Kelvin	Kelvin					D	MOL		
7	L515	12.0	20	2,925	2,925	4,000	Any	C-6	11°	50.7	45.0	GX5.3	B
8	L520	12.0	42	3,050	3,050	4,000	Any	C-6	12°	50.7	45.0	GX5.3	B
9	L521	12.0	50	3,050	3,050	4,000	Any	C-6	13°	50.7	45.0	GX5.3	B
10	L522	12.0	65	3,050	3,050	4,000	Any	C-6	13°	50.7	45.0	GX5.3	B
11	L523	12.0	75	3,050	3,050	4,000	Any	C-6	14°	50.7	45.0	GX5.3	B

Recommended Holders/Sockets Pages 30 & 31. Add -CG to part number for Cover Glass.

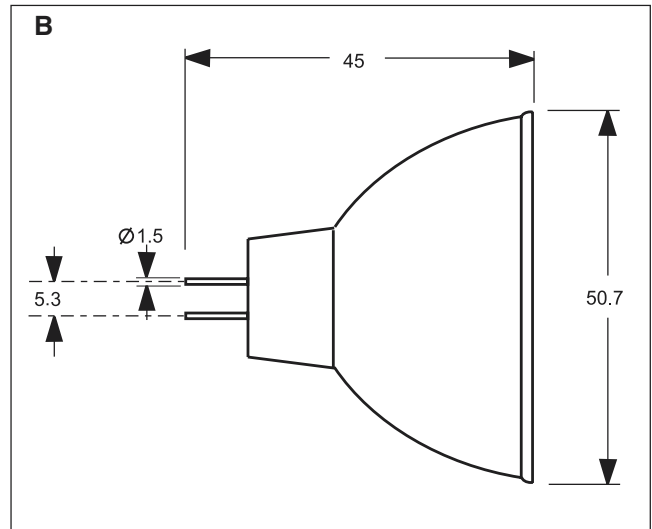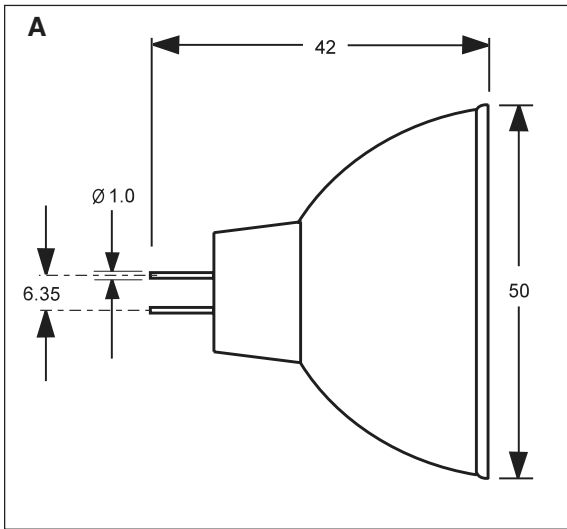

MR16 Halogen Lamp with Focused Ellipsoidal Dichroic Reflectors

Line No.	Part No.	Reference No.	Volts	Watts	Color Temp. Degrees Kelvin	Life Hours	Burning Position	Filament Type	Focal Distance*	Dimensions D	Dimensions MOL	Base Type	Drawing
1	L6408	—	12.0	75	3,000	1,500	Any	C-8I	32	50.0	42.0	GZ6.35	A
2	L6409	EKE	21.0	150	3,250	200	Any	CC-6	44	50.0	45.0	GX5.3	B

*Focal Distance is measured from the rim of the reflector.

