

SANYO

No.3802A

**Single-chip PLL and Microcontroller
with LCD Driver****OVERVIEW**

The LC7233 is a single-chip microcontroller that incorporates a phase-locked loop (PLL), which can operate up to 150 MHz, and a liquid-crystal display (LCD) driver, making it ideal for digital tuners. It has a large number of input/output ports and a frequency measurement circuit.

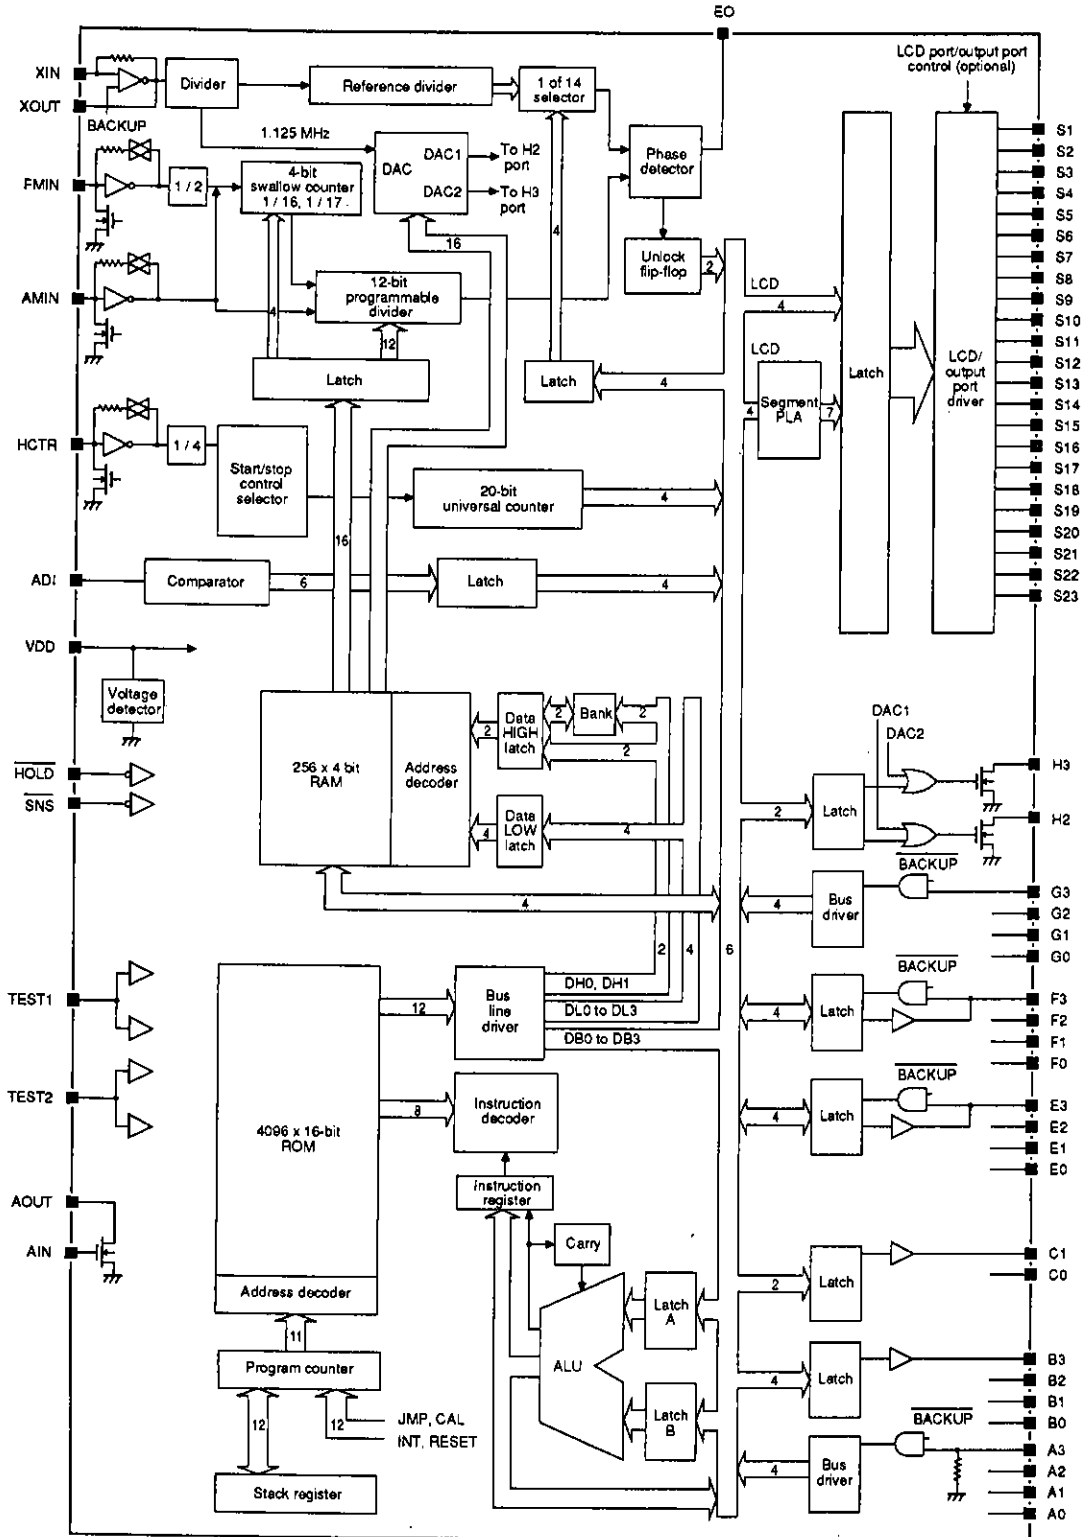
The LC7233 features on-chip RAM and ROM, a programmable high-speed divider, a 6-bit analog-to-digital converter and a low-voltage detection reset circuit.

The LC7233 operates from a single 5 V supply and is available in 64-pin QIPs.

FEATURES

- 150 MHz phase-locked loop
- LCD driver
- 6-bit analog-to-digital converter
- Two 8-bit PWM digital-to-analog converters
- Two 4-bit input ports
- Two 4-bit input/output ports
- 6-bit keypad matrix scan output
- 2-bit open-drain high-voltage output
- 23 mask-selectable output drivers
- 20-bit universal counter
- 4096 × 16-bit program ROM (000H to FFEH user-addressable memory)
- 256 × 4-bit data RAM
- Low-voltage detection reset circuit
- Programmable high-speed divider
- Single-word instructions
- Four-level stack
- PLL-unlocked flip-flop
- Timer flip-flop
- Programmable watchdog interrupt address
- Standby mode
- CPU operates down to 3.5 V, with data retention down to 1.3 V.
- Single 5 V supply
- 64-pin QIP







BLOCK DIAGRAM





PIN DESCRIPTION

Number	Name	Equivalent circuit	Description
1	XIN		Crystal oscillator connections
64	XOUT		
2	TEST2		Test pins
63	TEST1		
3 to 6	PG3 to PG0		Input port G
7, 8	PH1, PH0		Output port H
9 to 12	PF3 to PF0		Input/output port F
13 to 16	PE3 to PE0		Input/output port E
17, 18	PC1, PC0		Output port C
19 to 22	PB3 to PB0		Output port B
23 to 26	PA3 to PA0		Input port A

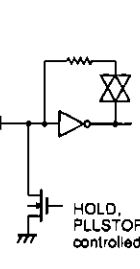LC7233

Number	Name	Equivalent circuit	Description
27 to 49	S23 to S1	 BACKUP	LCD segment outputs
50, 51	COM2, COM1	 BACKUP	LCD common driver outputs
52	HOLD		Hold-mode control input
55	SNS		Power-fail detect
53	ADI	 ref HOLD, PLLSTOP controlled	A/D converter input
54	HCTR	 HOLD, PLLSTOP controlled	Universal counter input
56	VDD		5 V supply
57	FMIN	 HOLD, PLLSTOP controlled	FM VCO input
58	AMIN		AM VCO input
59	VSS		Ground

Number	Name	Equivalent circuit	Description
60	E0		Phase comparator output
61	A1N		Analog input
62	A1OUT		Analog output

SPECIFICATIONS

Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage range	$V_{DD\ max}$	-0.3 to 6.5	V
Port G, HOLD, ADI and SNS input voltage range	V_{IN1}	-0.3 to 13	V
Input voltage range (other inputs)	V_{IN2}	-0.3 to $V_{DD} + 0.3$	V
Port H and AOUT output voltage range	V_{OUT1}	-0.3 to 15	V
Output voltage range (all other outputs)	V_{OUT2}	-0.3 to $V_{DD} + 0.3$	V
Port H output current range	I_{OUT1}	0 to 5	mA
Ports E and F output current range	I_{OUT2}	0 to 3	mA
Ports B and C output current range	I_{OUT3}	0 to 1	mA
AOUT output current range	I_{OUT4}	0 to 2	mA
Power dissipation	P_D	400	mW
Operating temperature range	T_{opr}	-40 to 85	deg. C
Storage temperature range	T_{stg}	-45 to 125	deg. C

Recommended Operating Conditions

$T_a = 25\ \text{deg. C}$

Parameter	Symbol	Rating	Unit
Supply voltage	V_{DD}	5	V
Supply voltage range (PLL and CPU)	V_{DD1}	4.5 to 5.5	V
Supply voltage range (CPU)	V_{DD2}	3.5 to 5.5	V
Supply voltage range for data retention	V_{DD3}	1.3 to 5.5	V

Electrical Characteristics

 $V_{DD} = 3.5$ to 5.5 V, $T_a = -40$ to 85 deg. C unless otherwise noted

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
Port G HIGH-level input voltage	V_{IH1}		$0.7V_{DD}$	–	8.0	V
\overline{SNS} HIGH-level input voltage	V_{IH2}		2.5	–	8.0	V
Port A HIGH-level input voltage	V_{IH3}		$0.6V_{DD}$	–	V_{DD}	V
Ports E and F HIGH-level input voltage	V_{IH4}		$0.7V_{DD}$	–	V_{DD}	V
\overline{HOLD} HIGH-level input voltage	V_{IH5}		$0.8V_{DD}$	–	8.0	V
Port G LOW-level input voltage	V_{IL1}		0	–	$0.3V_{DD}$	V
\overline{HOLD} LOW-level input voltage	V_{IL2}		0	–	$0.4V_{DD}$	V
\overline{SNS} LOW-level input voltage	V_{IL3}		0	–	1.3	V
Port A LOW-level input voltage	V_{IL4}		0	–	$0.2V_{DD}$	V
Ports E and F LOW-level input voltage	V_{IL5}		0	–	$0.3V_{DD}$	V
XIN input frequency	f_{IN1}	$V_{IN} = 0.5$ to 1.5 V	4.0	4.5	5.0	MHz
FMIN input frequency	f_{IN2}	$V_{IN} = 0.1$ to 1.5 V, $V_{DD} = 4.5$ to 5.5 V	10	–	130	MHz
		$V_{IN} = 0.15$ to 1.5 V, $V_{DD} = 4.5$ to 5.5 V	10	–	150	
AMIN input frequency (low range)	f_{IN3}	$V_{IN} = 0.1$ to 1.5 V, $V_{DD} = 4.5$ to 5.5 V	0.5	–	10	MHz
AMIN input frequency (high range)	f_{IN4}	$V_{IN} = 0.1$ to 1.5 V, $V_{DD} = 4.5$ to 5.5 V	2.0	–	40	MHz
HCTR input frequency	f_{IN5}	$V_{IN} = 0.1$ to 1.5 V, $V_{DD} = 4.5$ to 5.5 V	0.4	–	12	MHz
XIN rms input amplitude	V_{IN1}		0.5	–	1.5	V
FMIN rms input amplitude	V_{IN2}		0.1	–	1.5	V
AMIN rms input amplitude	V_{IN3}		0.1	–	1.5	V
HCTR rms input amplitude	V_{IN4}		0.1	–	1.5	V
ADI input voltage range	V_{IN5}		0	–	V_{DD}	V
\overline{SNS} reject pulsewidth	P_{rej}		–	–	50	μs
Standby threshold voltage	V_{DET}		2.7	3.0	3.3	V
\overline{HOLD} , ADI, \overline{SNS} and port G HIGH-level input current	I_{IH1}	$V_{IN} = 5.5$ V	–	–	3.0	μA
Ports A, E and F HIGH-level input current	I_{IH2}	Ports E and F are high impedance, port A has no R_{PD} , $V_{IN} = V_{DD}$	–	–	3.0	μA
XIN HIGH-level input current	I_{IH3}	$V_{IN} = V_{DD} = 5.0$ V	2	5	15	μA
FMIN, AMIN and HCTR HIGH-level input current	I_{IH4}	$V_{IN} = V_{DD} = 5.0$ V	4	10	30	μA
Port A HIGH-level input current	I_{IH5}	$V_{IN} = V_{DD} = 5.0$ V, port A has R_{PD}	–	50	–	μA
AIN HIGH-level input current	I_{IH6}	$V_{IN} = V_{DD}$	–	0.01	10.00	nA

LC7233


Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
HOLD, ADI, SNS and port G LOW-level input current	I_{IL1}	$V_{IN} = V_{SS}$	-	-	3.0	μA
Ports A, E and F LOW-level input current	I_{IL2}	Ports E and F are high impedance, port A has no R_{PD} , $V_{IN} = V_{SS}$	-	-	3.0	μA
XIN LOW-level input current	I_{IL3}	$V_{IN} = V_{SS}$	2	5	15	μA
FMIN, AMIN and HCTR LOW-level input current	I_{IL4}	$V_{IN} = V_{SS}$	4	10	30	μA
AIN LOW-level input current	I_{IL5}	$V_{IN} = V_{SS}$	-	0.01	10.0	nA
Port A input voltage	V_{IF}	Port A is high impedance	-	-	$0.05V_{DD}$	V
Port A pull-down resistance	R_{PD}	$V_{DD} = 5 V$	75	100	200	$k\Omega$
EO output leakage current	I_{OFFH1}	$V_O = V_{DD}$	-	0.01	10.0	nA
Ports B, C, E and F output leakage current	I_{OFFH2}	$V_O = V_{DD}$	-	-	3.0	μA
Port H output leakage current	I_{OFFH3}	$V_O = 13 V$	-	-	5.0	μA
AOUT output leakage current	I_{OFFH4}	$V_O = 13 V$	-	-	1.0	μA
EO output leakage current	I_{OFFL1}	$V_O = V_{SS}$	-	0.01	10.0	nA
Ports B, C, E and F output leakage current	I_{OFFL2}	$V_O = V_{SS}$	-	-	3.0	μA
Ports B and C HIGH-level output voltage	V_{OH1}	$I_O = 1 mA$	$V_{DD} - 2.0$	$V_{DD} - 1.0$	$V_{DD} - 0.5$	V
Ports E and F HIGH-level output voltage	V_{OH2}	$I_O = 1 mA$	$V_{DD} - 1.0$	-	-	V
EO HIGH-level output voltage	V_{OH3}	$I_O = 500 \mu A$	$V_{DD} - 1.0$	-	-	V
XOUT HIGH-level output voltage	V_{OH4}	$I_O = 200 \mu A$	$V_{DD} - 1.0$	-	-	V
S1 to S23 HIGH-level output voltage	V_{OH5}	$I_O = -0.1 mA$	$V_{DD} - 1.0$	-	-	V
COM1 and COM2 HIGH-level output voltage	V_{OH6}	$I_O = 25 \mu A$	$V_{DD} - 0.75$	-	-	V
Ports B and C LOW-level output voltage	V_{OL1}	$I_O = 50 \mu A$	0.5	1.0	2.0	V
Ports E and F LOW-level output voltage	V_{OL2}	$I_O = 1 mA$	-	-	1.0	V
EO LOW-level output voltage	V_{OL3}	$I_O = 500 \mu A$	-	-	1.0	V
XOUT LOW-level output voltage	V_{OL4}	$I_O = 200 \mu A$	-	-	1.0	V
S1 to S23 LOW-level output voltage	V_{OL5}	$I_O = 0.1 mA$	-	-	1.0	V
AOUT LOW-level output voltage	V_{OL6}	$I_O = 5 mA$, $I_{AIN} = 1.3 V$	-	-	0.5	V
COM1 and COM2 LOW-level output voltage	V_{OL7}	$I_O = 25 \mu A$	0.3	0.5	0.75	V
Port H LOW-level output voltage	V_{OL8}	$I_O = 5 mA$	0.75	-	2.0	V
COM1 and COM2 mid-level output voltage	V_{M1}	$V_{DD} = 5 V$, $I_O = 20 \mu A$	2.0	2.5	3.0	V

LC7233

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
A/D converter error	ϵ	$V_{DD} = 4.5$ to 5.5 V	$-\frac{1}{2}$	–	$\frac{1}{2}$	lsb
Supply current	I_{DD1}	$f_{in} = 130$ MHz, $V_{DD} = 4.5$ to 5.5 V	–	15	20	mA
Hold-mode supply current	I_{DD2}	PLL halted, $t_{cyc} = 2.67$ μ s	–	1.5	–	mA
		PLL halted, $t_{cyc} = 13.33$ μ s, $V_{DD} = 3.5$ to 5.5 V	–	1.0	–	
		PLL halted, $t_{cyc} = 40.00$ μ s, $V_{DD} = 3.5$ to 5.5 V	–	0.7	–	
Standby-mode supply current	I_{DD3}	$V_{DD} = 5.5$ V, oscillator halted, $T_a = 25$ deg. C	–	–	5	μ A
		$V_{DD} = 2.5$ V, oscillator halted, $T_a = 25$ deg. C	–	–	1	

Measurement Circuits

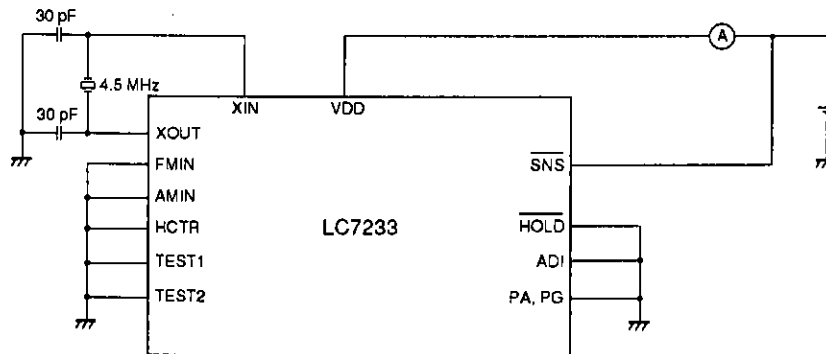
Hold mode



Notes

1. Ports E and F are selected as output ports.
2. Ports A to H, S1 to S23, COM1 and COM2 are open.

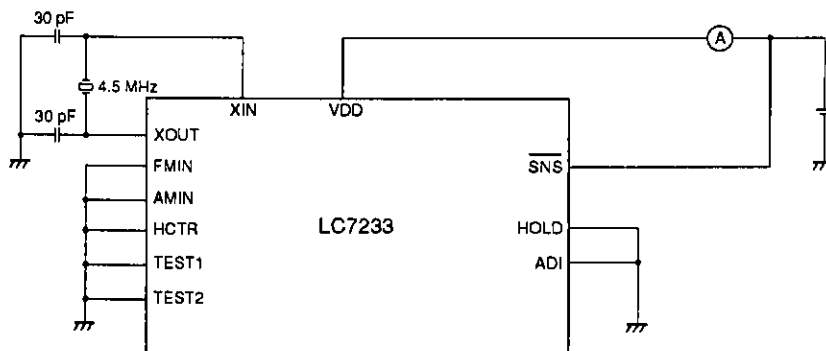Standby mode



Note

Ports A to H, S1 to S23, COM1 and COM2 are open.

FUNCTIONAL DESCRIPTION

LCD Driver

The LC7233 can drive LCD segments. The LCP and LCD instructions transfer data to the LCD outputs. The LCD instruction transfers data directly to the LCD outputs. The LCP instruction converts data to 7-segment format before transfer to the outputs.

S1 to S23 are the driver outputs. The LCD frame rate is 100 Hz with a 50% duty cycle. After reset or power-up, a blank signal is present on all outputs. In standby mode, all outputs are LOW. They can be used as general-purpose outputs if the appropriate mask option is selected.

COM1 and COM2 are the LCD common driver outputs. Output drive is 50% duty with 50% bias. Upon reset or after power-up, the normal drive signals are present on these outputs. In standby mode, all outputs are LOW.

Frequency Counter

Frequency measurement is performed at the HCTR input by the 20-bit universal counter. The input frequency range is 0.4 to 12 MHz, which is used for measuring AM and FM IF frequencies. Capacitive coupling should be used.

Phase-locked Loop

The FMIN or AMIN input signal is divided down by a programmable divider, and then compared with the crystal frequency, which is also divided down using 14 selectable ratios. The phase difference between the two signals is measured using a phase detector and output on EO.

FMIN is the input pin for the FM VCO input signal. The input frequency range is 10 to 130 MHz. Capacitive coupling should be used.

AMIN is the AM VCO input. The bandwidth is adjustable in two ranges by using the PLL instruction—HIGH (2 to 40 MHz) for the SW band, and LOW (0.5 to 10 MHz), for the LW and MW bands. Capacitive coupling should be used.

Input/Output Ports

Port A

This input port has a low switching threshold, which is used for keypad matrix inputs. Pull-down resistors for all pins are available as a mask option. Note that either all or none of the pins should have pull-down resistors. In standby mode, inputs are ignored.

Ports B and C

These output ports have unbalanced CMOS outputs which are used as keypad matrix scan outputs. Upon reset, outputs are set LOW, and in standby mode, outputs are high impedance. The outputs can be short-circuited.

Port E

The transfer direction of this input/output port is selected automatically under software control. When an input instruction (IN, TPT, or TPF) is executed, port E is configured for input operation, and an output instruction (OUT, SPB or RPB), for output operation. Upon reset, all pins become inputs. In standby mode, the output drivers are high impedance and the input signals are ignored. All bits should either be inputs or outputs.

Port F

The transfer direction of this input/output port is selected by the FPC instruction. Each pin of this port can be set independently to be an input or output. Upon reset, all pins become inputs. In standby mode, the output drivers are high impedance and the input signals are ignored.

Port G

This is an input port only. In standby mode, inputs are ignored.

Port H

These output ports are high-voltage, n-channel open-drain drivers, which are used for switching power supplies. Upon reset and in standby mode, outputs are high impedance. Port H can also be configured as the output of DAC1 and DAC2.

A/D Converter

The A/D converter is a 6-bit successive approximation type. The conversion cycle time is 1.28 ms. Full-scale output data is 3FH for an input of $V_{DD} \times (63/96)$.

Power-fall Detection

When connected to the supply, \overline{SNS} is used as a power-fail detector. \overline{SNS} can also be used as a standard input port.

Crystal Oscillator

The master crystal oscillator, which has a feedback resistor on-chip, requires only the connection of a 4.5 MHz crystal.

Low-power Modes**Hold mode**

When the hold-mode control pin, \overline{HOLD} , is driven LOW and the HOLDEN (hold enable) flip-flop has previously been set by an SS instruction, the LC7233 enters hold mode.

\overline{HOLD} has a high-voltage input ($V_{IH(max)} = 8.0$ V) which can be connected directly to the power supply.

Standby mode

When the LC7233 is in hold mode and \overline{HOLD} is LOW, standby mode can be set by the CKSTP instruction.

Test Pins

Two device test pins are provided—TEST1 and TEST2. These should either be tied to V_{SS} or left open.

INSTRUCTION SET

ADDR	Program memory address [12 bits]
b	Borrow
B	Bank number [2 bits]
C	Carry
DH	Data memory address high-order bits (row address) [2 bits]
DL	Data memory address low-order bits (column address) [4 bits]
I	Immediate data [4 bits]
M	Data memory address
N	Bit position [4 bits]
Pn	Port number [4 bits]
r	General register (Bank 00H to 0FH)
Rn	Register number [4 bits]
()	Contents of register or memory
()n	Contents of bit N of register or memory

Mnemonic	Operand		Operation	Instruction format																Description	Skip condition	
	1st	2nd		D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0			
				Add instructions																		
AD	r	M	Add M to r	0	1	0	0	0	0	0	0	0	0	0	0	0	Rn	DL	DH	Rn	$r \leftarrow (r) + (M)$ Adds the contents of M to the contents of r and stores the result in r	
ADS	r	M	Add M to r and skip if carry	0	1	0	0	0	1	0	0	0	0	0	0	0	Rn	DL	DH	Rn	$r \leftarrow (r) + (M)$, skip if carry Adds the contents of M to the contents of r and stores the result in r. Skips if a carry is generated	Carry
AC	r	M	Add M to r with carry	0	1	0	0	0	1	0	0	0	0	0	0	0	Rn	DL	DH	Rn	$r \leftarrow (r) + (M) + C$ Adds the contents of M to the contents of r and stores the result in r	
ACS	r	M	Add M to r with carry and skip if carry	0	1	0	0	0	1	1	0	0	0	0	0	0	Rn	DL	DH	Rn	$r \leftarrow (r) + (M) + C$, skip if carry Adds the content of M to the contents of r and stores the result in r. Skips if a carry is generated	Carry
AI	M	I	Add I to M	0	1	0	1	0	0	0	0	0	0	0	0	I	DL	DH	I	$M \leftarrow (M) + I$ Adds the immediate data to the contents of M and stores the result in M		
AIS	M	I	Add I to M and skip if carry	0	1	0	1	0	1	0	0	0	0	0	0	I	DL	DH	I	$M \leftarrow (M) + I$, skip if carry Adds the immediate data to the contents of M and stores the result in M. Skips if a carry is generated	Carry	
AIC	M	I	Add I to M with carry	0	1	0	1	0	1	0	0	0	0	0	0	I	DL	DH	I	$M \leftarrow (M) + I + C$ Adds the immediate data to the contents of M and stores the result in M		
AICS	M	I	Add I to M with carry and skip if carry	0	1	0	1	0	1	1	0	0	0	0	0	I	DL	DH	I	$M \leftarrow (M) + I + C$, skip if carry Adds the immediate data to the contents of M and stores the result in M. Skips if a carry is generated	Carry	
Subtract instructions																						
SU	r	M	Subtract M from r	0	1	1	0	0	0	0	0	0	0	0	0	Rn	DL	DH	Rn	$r \leftarrow (r) - (M)$ skip if carry Subtracts the contents of M from the contents of r and stores the result in r		
SUS	r	M	Subtract M from r and skip if borrow	0	1	1	0	0	1	0	0	0	0	0	0	Rn	DL	DH	Rn	$r \leftarrow (r) - (M)$, skip if borrow Subtracts the contents of M from the contents of r and stores the result in r. Skips if a borrow is generated	Borrow	
SB	r	M	Subtract M from r with borrow	0	1	1	0	0	1	0	0	0	0	0	0	Rn	DL	DH	Rn	$r \leftarrow (r) - (M) - b$ Subtracts the contents of M from the contents of r with borrow and stores the result in r		
SBS	r	M	Subtract M from r with borrow and skip if borrow	0	1	1	0	0	1	1	0	0	0	0	0	Rn	DL	DH	Rn	$r \leftarrow (r) - (M) - b$, skip if borrow Subtracts the contents of M from the contents of r with borrow and stores the result in r. Skips if a borrow is generated	Borrow	
SI	M	I	Subtract I from M	0	1	1	1	0	0	0	0	0	0	0	I	DL	DH	I	$M \leftarrow (M) - I$ Subtracts the immediate data from the contents of M and stores the result in M			
SIS	M	I	Subtract I from M and skip if borrow	0	1	1	1	0	1	0	0	0	0	0	I	DL	DH	I	$M \leftarrow (M) - I$, skip if borrow Subtracts the immediate data from the contents of M and stores the result in M. Skips if a borrow is generated	Borrow		
SIB	M	I	Subtract I from M with borrow	0	1	1	1	0	1	1	0	0	0	0	I	DL	DH	I	$M \leftarrow (M) - I - b$ Subtracts the immediate data from the contents of M with borrow and stores the result in M			

Mnemonic	Operand		Operation	Instruction format																Notation	Description	Skip condition
	1st	2nd		D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0			
	M	I		0	1	1	1	1	1	1	DH	DL										
SIBS	M	I	Subtract I from M with borrow and skip if borrow	0	1	1	1	1	1	DH	DL								$M \leftarrow (M) - I - b$, skip if borrow	Borrow		
Compare instructions																						
SEQ	r	M	Skip if r equals M	0	0	0	0	0	1	DH	DL						Rn	$(r) - (M)$, skip if zero	$(r) = (M)$			
SGE	r	M	Skip if r is greater than or equal to M	0	0	0	0	1	1	DH	DL						Rn	$(r) - (M)$, skip if $(r) \geq (M)$	$(r) \geq (M)$			
SEOI	M	I	Skip if M equals I	0	0	1	1	0	1	DH	DL						I	$(M) - I$, skip if zero	$(M) - I = 0$			
SGEI	M	I	Skip if M is greater than or equal to I	0	0	1	1	1	1	DH	DL						I	$(M) - I$, skip if $(M) \geq I$	$(M) \geq I$			
Logic arithmetic instructions																						
AND	M	I	AND I with M	0	0	1	1	0	0	DH	DL						I	$M \leftarrow (M) \cdot I$	Calculates the logic-AND of the immediate data and the contents of M and stores the result in M			
OR	M	I	OR I with M	0	0	1	1	1	0	DH	DL						I	$M \leftarrow (M) + I$	Calculates the logic-OR of the immediate data and the contents of M and stores the result in M			
EXL	r	M	Exclusive-OR M with r	0	0	1	0	0	0	DH	DL						Rn	$r \leftarrow (r) \oplus (M)$	Calculates the logic-XOR of the contents of r and M, and stores the result in r			
Load and store instructions																						
LD	r	M	Load M into r	1	0	0	0	0	0	DH	DL						Rn	$r \leftarrow (M)$	Moves the contents of M to r			
ST	M	r	Store r in M	1	0	0	0	0	1	DH	DL						Rn	$M \leftarrow (r)$	Moves the contents of r to M			
MVDR	r	M	Move M to M addressed by Rn	1	0	0	0	1	0	DH	DL						Rn	$[DH, Rn] \leftarrow (M)$	Moves the contents of M to the address referenced by DH and Rn			
MVRS	M	r	Move M addressed by Rn to M	1	0	0	0	1	1	DH	DL						Rn	$M \leftarrow [DH, Rn]$	Moves the contents of the memory location referenced by DH and Rn to M			
MVSR	M1	M2	Move M to M	1	0	0	1	0	0	DH	DL1	DL2					DL2	$[DH, DL1] \leftarrow [DH, DL2]$	Moves the contents of memory location 2 to memory location 1			
MM	M	I	Move I to M	1	0	0	1	0	1	DH	DL						I	$M \leftarrow I$	Moves the immediate data to M			
PLL	M	r	Load M to PLL registers	1	0	0	1	1	0	DH	DL						Rn	$PLLr \leftarrow (M)$	Moves the contents of M to the PLL registers			

Mnemonic	Operand		Operation	Instruction format												Description	Skip condition				
	1st	2nd		D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4			D3	D2	D1	D0
8-bit test instructions																					
TMT	M	N	Test bits of M and skip if true	1	0	1	0	0	1	DH	DL	N							Skips if M(N) = all 1	All bits specified = 1	
TMF	M	N	Test bits of M and skip if false	1	0	1	0	1	DH	DL	N							Skips if M(N) = all 0	All bits specified = 0		
Jump and subroutine instructions																					
JMP	ADDR		Jump to address	1	0	1	1	ADDR (12 bits)												Jumps to the address specified by ADDR	
CAL	ADDR		Call subroutine	1	1	0	0	ADDR (12 bits)												Jumps to the subroutine specified by ADDR	
RT			Return from subroutine	1	1	0	1	0	1	0	0	0	0	0	0	0	0	0	0	Returns from a subroutine	
Flag test instructions																					
TTM	N		Test timer flip-flop	1	1	0	1	0	1	1	0	0	0	0	0	0	N	Skip if timer F/F = 0		Timer F/F = 0	
TUL	N		Test PLL flip-flop	1	1	0	1	0	1	1	0	0	0	0	0	N	Skip if PLL F/F = 0		PLL F/F = 0		
Status register test and set instructions																					
SS	N		Set status register bit	1	1	0	1	1	1	0	0	0	0	0	0	N	Set status register 1) N ← 1				
RS	N		Reset status register bit	1	1	0	1	1	1	0	1	0	0	0	N	Reset status register 1) N ← 0					
TST	N		Test status register bits and skip if true	1	1	0	1	1	1	1	0	0	0	0	N	Skip if status register 2) N = all 1		All bits specified = 1			
TSF	N		Test status register bits and skip if false	1	1	0	1	1	1	1	1	0	0	0	N	Skip if status register 2) N = all 0		All bits specified = 0			
Bank select instruction																					
BANK	B		Select bank	1	1	0	1	0	0	B	0	0	0	0	0	0	0	0	0	Selects one of four memory banks	
Input/output instructions																					
LCD	M	I	Move data to LCD segments	1	1	1	0	0	0	DH	DL	DIGIT							Loads the immediate data directly to the LCD driver		
LCP	M	I	Move 7-segment data to LCD	1	1	1	0	0	1	DH	DL	DIGIT							Converts the immediate data to 7-segment format using a PLA then transfers it to the LCD driver		
IN	M	Pn	Move port data to M	1	1	1	0	1	0	DH	DL	P							Moves the data from input port Pn to M		

Mnemonic	Operand		Operation	Instruction format																Notation	Description	Skip condition
	1st	2nd		D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0			
	M	P _n		1	1	1	0	1	1	DH	DL	P	N	N	N	N	N	N	N			
OUT	M	P _n	Move data to port	1	1	1	0	1	1	DH	DL	P	N	N	N	N	N	(Port (P _n)) ← M	Moves the contents of memory location M to port P _n			
SPB	P _n	N	Set port bits	1	1	1	1	0	0	0	P	N	N	N	N	N	N	(Port (P _n)) N ← 1	Sets the bits of port P _n specified by N, to logic 1			
RPB	P _n	N	Reset port bits	1	1	1	1	0	1	0	P	N	N	N	N	N	N	(Port (P _n)) N ← 0	Sets the bits of port P _n specified by N, to logic 0			
TPT	P _n	N	Test bits of port and skip if true	1	1	1	1	1	0	1	P	N	N	N	N	N	N	Skip if (port (P _n)) N = all 1	Tests the bits of port P _n specified by N. Skips if all bits are logic 1	All bits specified = 1		
TPF	P _n	N	Test bits of port and skip if false	1	1	1	1	1	1	1	P	N	N	N	N	N	N	Skip if (port (P _n)) N = all 0	Tests the bits of port P _n specified by N. Skips if all bits are logic 0	All bits specified = 0		
Universal counter instructions																						
UCS	I		Set UCCW1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	UCCW1 ← 1	Sets the universal counter flag 1			
UCC	I		Set UCCW2	0	0	0	0	0	1	1	0	0	0	0	0	0	0	UCCW2 ← 1	Sets the universal counter flag 2			
Miscellaneous instructions																						
FPC	N		Port F direction control	0	0	0	1	0	0	0	0	0	0	0	0	0	0	FPC latch ← N	Defines the direction of individual pins of port F. If a bit in the port F direction register is set by FPC, the corresponding pin of port F becomes an output.			
CSSTP			Stop clock	0	0	0	1	0	0	1	0	0	0	0	0	0	0	Stop clock if HOLD = 0	Stops the processor clock if HOLD = 0			
DAC	I		Move data to DAC registers	0	0	0	0	0	1	0	0	0	0	0	0	0	0	DAC _i ← I	Loads the immediate data to the DAC registers			
NOP			No operation	0	0	0	0	0	0	0	0	0	0	0	0	0	0		No operation			

MASK OPTIONS

Parameter	Options
Watchdog timer (WDT)	Yes
	No
Pull-down resistors on port A (the keypad matrix input port)	Yes
	No
Instruction cycle time	2.67 μ s
	13.33 μ s
	40.00 μ s
S1 to S23 configuration	LCD driver output port
	General-purpose output port

DEVELOPMENT SYSTEM

The LC7233 development environment is shown in figure 1. It uses an LC72EV32 evaluation chip mounted on a TB-72EV32 target board and a multifunctional emulator (RE32), which is controlled by a personal computer, to provide full debugging facilities.

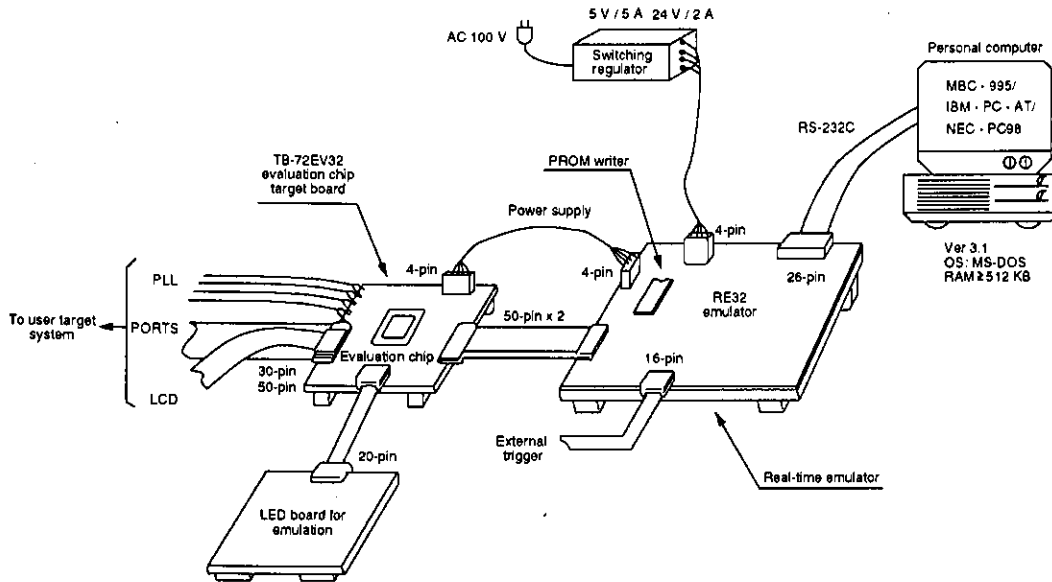


Figure 1. Development system