


4.0 mm × 4.0 mm Series

Conventional Part No. Global Part No. Lighting Color
 LN252RPX LNG252RKR Red
 LN352GPX LNG352GKG Green
 LN452YPX LNG452YKX Amber

■ 絶対最大定格 Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)




Lighting Color	P_D (mW)	I_F (mA)	I_{FP} (mA)*	V_R (V)	T_{opr} ($^\circ\text{C}$)	T_{stg} ($^\circ\text{C}$)
Red	70	25	150	4	-25 ~ +85	-30 ~ +100
Green	90	30	150	4	-25 ~ +85	-30 ~ +100
Amber	90	30	150	4	-25 ~ +85	-30 ~ +100

I_{FP} の条件は duty 10% , Pulse width 1 msec. The condition of I_{FP} is duty 10%, Pulse width 1 msec

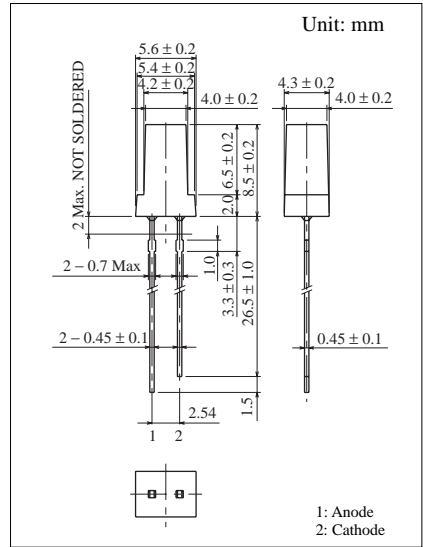


■ 電気的光学的特性 Electro-Optical Characteristics ($T_a = 25^\circ\text{C}$)

Conventional Part No.	Lighting Color	Lens Color	I_O		I_F	V_F		λ_P	$\Delta\lambda$	I_F	I_R	
			Typ	Min		Typ	Max				Max	V_R
LN252RPX	Red	Red Diffused	0.6	0.2	15	2.2	2.8	700	100	20	5	4
LN352GPX	Green	Green Diffused	2.0	0.7	20	2.2	2.8	565	30	20	10	4
LN452YPX	Amber	Amber Diffused	1.5	0.5	20	2.2	2.8	590	30	20	10	4
Unit	—	—	mcd	mcd	mA	V	V	nm	nm	mA	μA	V

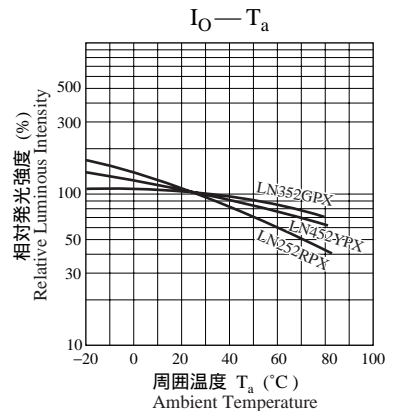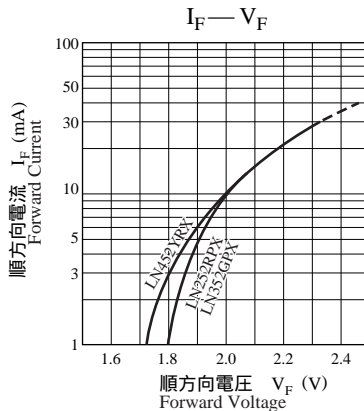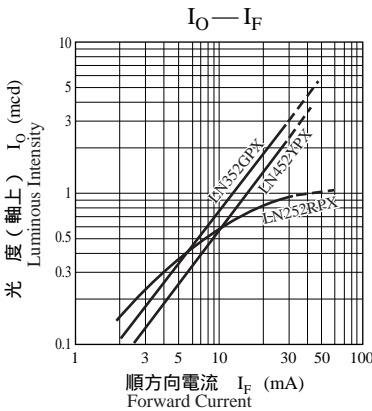

相对発光強度 — 波長特性
 Relative Luminous Intensity
 Wavelength Characteristics

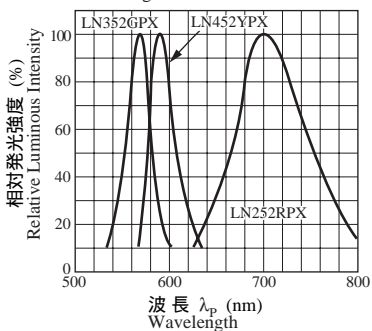

指向特性
 Directive Characteristics

