



# High Collector-Emitter Voltage Type Photocoupler

## LTV-703V Series


### Features

- High collector-emitter voltage ( $V_{CE0}=70V$ )
- High input-output isolation voltage: ( $V_{iso} : 5,000V_{rms}$ )
- Directly connectable to TTL
- UL approved (No. E113898)
- TUV approved (No. R9653630)
- CSA approved (No. CA91533-1)
- FIMKO approved (No. 193422)
- NEMKO approved (No. P96103013)
- DEMKO approved (No. 303968)
- SEMKO approved (No. 9646047/01-30)
- VDE approved (No. 094722)
- Options available :
  - Leads with 0.4"(10.16mm)spacing (M Type)
  - Leads bends for surface mounting(S Type)
  - Tape and Reel of Type I for SMD(Add"-TA"Suffix)
  - Tape and Reel of Type II for SMD(Add"-TA1"Suffix)
  - VDE 0884 approvals (Add"-V"Suffix)

### Applications

1. Telephone sets, telephone exchangers.
2. System appliances, measuring instruments.
3. Signal transmission between circuits of different potentials and impedances.

### Package Dimensions

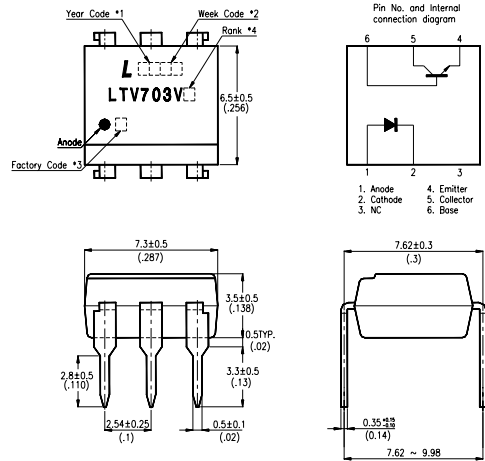

Note:

1. Year date code.
2. 2-digit work week.
3. Factory code shall be marked (Z : Taiwan, Y : Thailand).
4. Rank shall be or shall not be marked.
5. All dimensions are in millimeters (inches).
6. Tolerance is  $\pm 0.25mm$  (.010") unless otherwise noted.
7. Specifications are subject to change without notice.

### Ordering Information

Part Number	Package	Safety Standard Approval	Application part number
LTV-703V LTV-703VM LTV-703VS LTV-703VS-TA LTV-703VS-TA1	6-pin DIP 6-pin (leads with 0.4" spacing) 6-pin (lead bends for surface mount) 6-pin (tape and reel packaging of type I) 6-pin (tape and reel packaging of type II)	<ul style="list-style-type: none"> <li>• UL approved</li> <li>• TUV approved</li> <li>• CSA approved</li> <li>• FIMKO approved</li> <li>• NEMKO approved</li> <li>• SEMKO approved</li> <li>• DEMKO approved</li> </ul>	LTV - 703V
LTV703V-V LTV703VM-V LTV703VS-V LTV703VSTA-V LTV703VSTA1-V	6-pin DIP 6-pin (leads with 0.4" spacing) 6-pin (lead bends for surface mount) 6-pin (tape and reel packaging of type I) 6-pin (tape and reel packaging of type II)	<ul style="list-style-type: none"> <li>• VDE approved</li> </ul>	LTV - 703V

PHOTOCOUPLER

## Absolute Maximum Ratings

(Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward Current	IF	50	mA
	Reverse Voltage	VR	6	V
	Power Dissipation	P	70	mW
Output	Collector-Emitter Voltage	VCEO	70	V
	Emitter-Collector Voltage	VECO	6	V
	Collector Current	IC	50	mA
	Collector Power Dissipation	PC	160	mW
	Collector-Base Voltage	VCBO	70	V
	Emitter-Base Voltage	VEBO	6	V
Total Power Dissipation		Ptot	200	mW
Operating Temperature		Topr	-30~+100	°C
Storage Temperature		Tstg	-55~+125	°C
*1.Isolation Voltage		Viso	5	KVrms
*2.Soldering Temperature		Tsol	260	°C

\*1. AC for 1 minute, R.H. = 40 ~ 60%

• Isolation voltage shall be measured using the following method.

(1) Short between anode and cathode on the primary side and between collector, emitter and base on the secondary side.

(2) The isolation voltage tester with zero-cross circuit shall be used.

(3) The waveform of applied voltage shall be a sine wave.

\*2. For 10 seconds.

## Electrical/Optical Characteristics

(Ta=25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Input	Forward Voltage	VF	—	1.2	1.4	V	IF=20mA
	Reverse Current	IR	—	—	10	μA	VR=4V
	Terminal Capacitance	Ct	—	30	250	pF	V=0, f=1KHz
Output	Collector Dark Current	ICEO	—	—	100	nA	VCE=20V
	Collector-Emitter Breakdown Voltage	BVCEO	70	—	—	V	IC=0.1mA
	Emitter-Collector Breakdown Voltage	BVECO	6	—	—	V	IE=10 μA
	Collector-Base Breakdown Voltage	BVCBO	70	—	—	V	IC=0.1mA
Transfer Characteristics	Collector Current	IC	4	—	32	mA	IF=10mA VCE=5V
	*Current Transfer Ratio	CTR	40	—	320	%	IF=10mA VCE=5V
	Collector-emitter Saturation Voltage	VCE(sat)	—	0.1	0.2	V	IF=20mA, IC=1mA
	Isolation Resistance	RISO	5 × 10 <sup>10</sup>	10 <sup>11</sup>	—	Ω	DC500V, 40~60% R.H.
	Floating Capacitance	Cf	—	0.6	1.0	pF	V=0, f=1MHz
	Cut-off Frequency	fc	—	80	—	KHz	VCE=5V, IC=2mA RL=100 Ω, -3dB
	Response Time (Rise)	tr	—	4	15	μs	VCE=2V, IC=2mA RL=100 Ω
Response Time (Fall)	tf	—	3	15	μs		

$$*CTR = \frac{I_C}{I_F} \times 100\%$$

## ■ Supplement

### Rank Table of Current Transfer Ratio CTR

Model No.	Rank Mark	CTR(%)
LTV-703V	A	40~80
LTV-703V	B	63~125
LTV-703V	C	100~200
LTV-703V	D	160~320
LTV-703V	A or B or C or D	40~320
Conditions	$I_F=10\text{mA}$ $V_{CE}=5\text{V}$ $T_a=25^\circ\text{C}$	

### Typical Electrical/Optical Characteristic Curves ( $25^\circ\text{C}$ Ambient Temperature Unless Otherwise Noted)

Fig.1 Forward Current vs. Ambient Temperature




Fig.2 Collector Power Dissipation vs. Ambient Temperature




Fig.3 Collector-emitter saturation Voltage vs. Forward current




Fig.4 Forward Current vs. Forward Voltage




Fig.5 Current Transfer Ratio vs. Forward Current







Fig.6 Collector Current vs. Collector-emitter Voltage




**Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature**

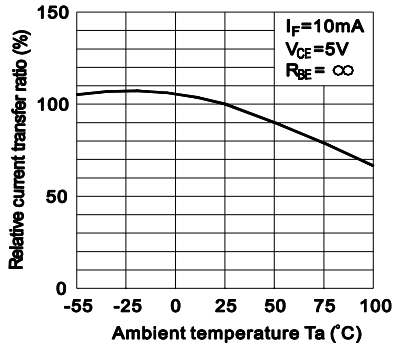


**Fig.8 Collector-emitter Saturation Voltage vs. Ambient Temperature**

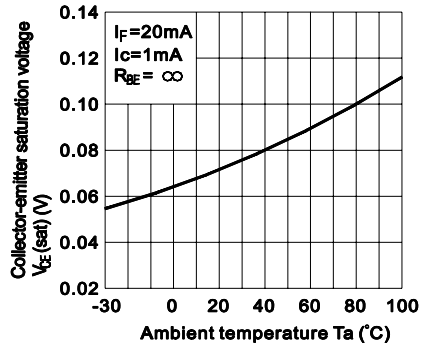


**Fig.9 Collector Dark Current vs. Ambient Temperature**

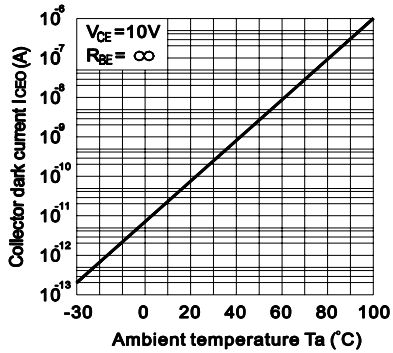


**Fig.10 Response Time vs. Load Resistance**

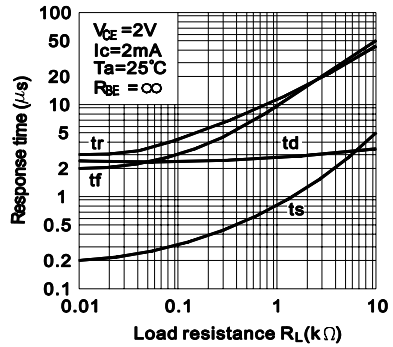

**Fig.11 Frequency Response**

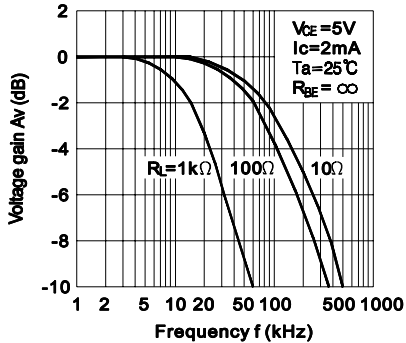

**Test Circuit for Response Time**

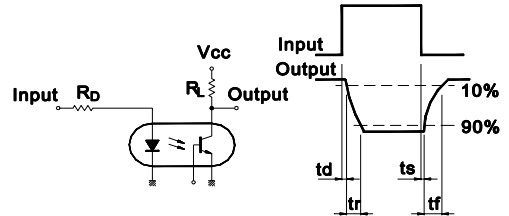

**Test Circuit for Frequency Response**

