



# M3V Series


## 9x14 mm, 3.3 Volt, HCMOS/TTL, VCXO

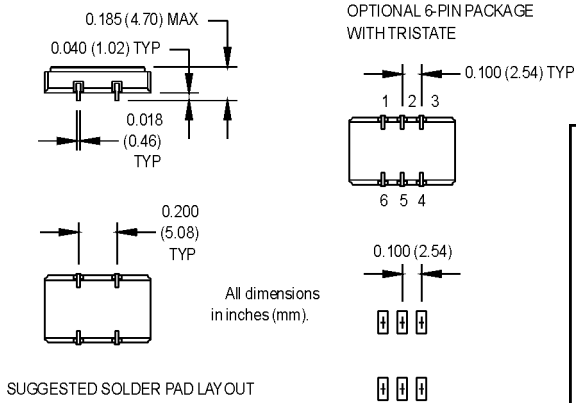

- HCMOS/TTL output to 160 MHz and excellent jitter (2.1 ps typ.) in a SMT package
- Phase-Locked Loops (PLL's), Clock Recovery, Reference Signal Tracking, Synthesizers, Frequency Modulation/Demodulation

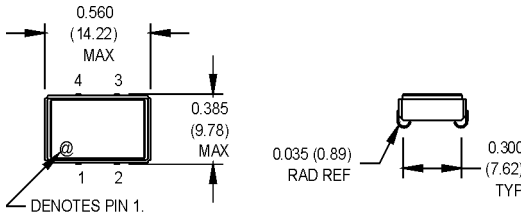

SUGGESTED SOLDER PAD LAYOUT



### Pin Connections

FUNCTION	4 Pin Pkg.	6 Pin Pkg.
Control Voltage	1	1
Tristate		2
Circuit/Case Ground	2	3
Output	3	4
N/C		5
+Vdd	4	6

### Ordering Information

Product Series	M3V	1	3	V	2	C	J	-R	00.0000	MHz	
Temperature Range	1: 0°C to +70°C		2: -40°C to +85°C								
Stability	1: ±1000 ppm		2: ±500 ppm		3: ±100 ppm		4: ±50 ppm				
	5: ±35 ppm		6: ±25 ppm		*8: ±20 ppm						
Output Type	V: Voltage Controlled		T: Tristate								
Pull Range (Vc = 0.3 to 3.0 V)**	1: ±50 ppm min.		2: ±80 ppm min.								
Symmetry/Logic Compatibility	A: 40/60 CMOS/TTL		C: 45/55 CMOS								
Package/Lead Configurations	J: J Lead										
RoHS Compliance	Blank: non-RoHS compliant part		-R: RoHS compliant part								
Frequency (customer specified)											

\*Contact factory for availability.  
\*\*Other pull ranges available. Contact factory.

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes
Frequency Range	F	1.544		160	MHz	See Note 1
Operating Temperature	Ta	(See Ordering Information)				
Storage Temperature	Ts	-55		+125	°C	
Frequency Stability	ΔF/F	(See Ordering Information)				
Aging						
1st Year		-3/-5		+3/+5	ppm	< 52 MHz / ≥ 52 MHz
Thereafter (per year)		-1/-2		+1/+2	ppm	< 52 MHz / ≥ 52 MHz
Pullability/APR		(See Ordering Information)				
Control Voltage	Vc	0.3	1.65	3.0	V	Over control voltage
Linearity				10	%	Positive Monotonic Slope
Modulation Bandwidth	fm	10			kHz	
Input Impedance	Zin	50k			Ohms	
Input Voltage	Vdd	3.135	3.3	3.465	V	
Input Current	idd			20		1.544 to 24 MHz
				55	mA	24.001 to 96 MHz
				65	mA	96.001 to 160 MHz
Output Type						HCMOS/TTL
Load						See Note 2
1.544 to 60 MHz		10 TTL or 50 pF				
60.001 to 160 MHz		5 TTL or 30 pF				
Symmetry (Duty Cycle)		(See Ordering Information)				
Logic "1" Level	Voh	90% Vdd			V	HCMOS load
		Vdd -0.5			V	TTL Load
Logic "0" Level	Vol			10% Vdd	V	HCMOS load
				0.5	V	TTL load
Rise/Fall Time	Tr/Tf		3	10	ns	See Note 4
Tristate Function		Input Logic "1": output active Input Logic "0": output disables to high-Z				
Start up Time			4		ms	
Phase Jitter @ 155.52 MHz	φ J		3	5	ps RMS	Integrated 12 kHz - 20 MHz
Phase Noise (Typical) @ 155.52 MHz		100 Hz	1 kHz	10 kHz	100 kHz	Offset from carrier
		-60	-90	-112	-120	dBc/Hz

1. Frequencies above 70 MHz utilize a PLL design. Fundamental and PLL designs are available at other frequencies. Contact factory for availability.
2. TTL load - see load circuit diagram #1. HCMOS load - see load circuit diagram #2.
3. Symmetry is measured at 1.4 V with TTL load, and at 50% Vdd with HCMOS load.
4. Rise/Fall times are measured between 0.5 V and 2.4 V with TTL load, and between 10% Vdd and 90% Vdd with HCMOS load.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see [www.mtronpti.com](http://www.mtronpti.com) for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

# MtronPTI Lead Free Solder Profile

