



# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps

## General Description

The MAX4434/MAX4435 single and MAX4436/MAX4437 dual operational amplifiers feature wide bandwidth, 16-bit settling time in 23ns, and low-noise/low-distortion operation. The MAX4434/MAX4436 are compensated for unity-gain stability and have a small-signal -3dB bandwidth of 150MHz. The MAX4435/MAX4437 are compensated for closed-loop gains of +5 or greater and have a small-signal, -3dB bandwidth of 150MHz.

The MAX4434-MAX4437 op amps require only 15mA of supply current per amplifier while achieving 115dB open-loop gain. Voltage noise density is a low 2.2nV/√Hz and provides 97dB spurious-free dynamic range (SFDR) at 1MHz. These characteristics make these op amps ideal for driving modern, high-speed 14- and 16-bit analog-to-digital converters (ADCs).


These high-speed op amps feature wide-output voltage swings and a high-current output drive up to 65mA. Using a voltage feedback architecture, the MAX4434-MAX4437 meet the requirements of many applications that previously depended on current feedback amplifiers.

The MAX4434/MAX4435 are available in space-saving 5-pin SOT23 packages and the MAX4436/MAX4437 are available in 8-pin μMAX packages.

## Applications

High-Speed 14- and 16-Bit ADC Preamplifiers  
Low-Noise Preamplifiers  
IF/RF Amplifiers  
Low-Distortion Active Filters  
High-Performance Receivers  
Precision Instrumentation

## Pin Configurations

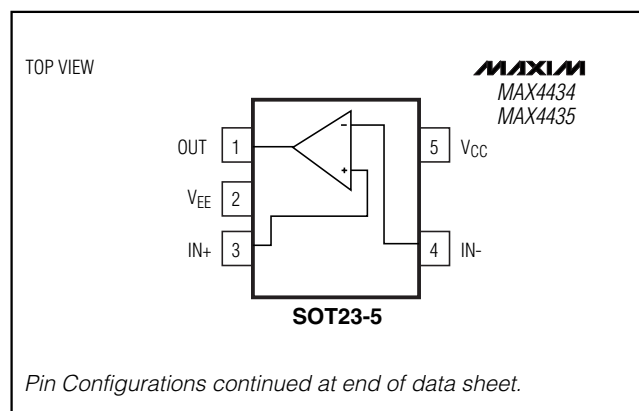

## Features


- ◆ 16-Bit Accurate Settling in 23ns (MAX4435/MAX4437)
- ◆ 97dB SFDR at 1MHz, 4Vp-p Output
- ◆ 2.2nV/√Hz Input Voltage Noise Density
- ◆ 100dB (min) Open-Loop Gain
- ◆ 388V/μs Slew Rate (MAX4435/MAX4437)
- ◆ 65mA High Output Drive
- ◆ Available in Space-Saving Packages
  - 5-Pin SOT23 (MAX4434/MAX4435)
  - 8-Pin μMAX (MAX4436/MAX4437)

## Ordering Information

| PART         | TEMP. RANGE    | PIN-PACKAGE |
|--------------|----------------|-------------|
| MAX4434EUK-T | -40°C to +85°C | 5 SOT23-5   |
| MAX4434ESA   | -40°C to +85°C | 8 SO        |
| MAX4435EUK-T | -40°C to +85°C | 5 SOT23-5   |
| MAX4435ESA   | -40°C to +85°C | 8 SO        |
| MAX4436EUA   | -40°C to +85°C | 8 μMAX      |
| MAX4436ESA   | -40°C to +85°C | 8 SO        |
| MAX4437EUA   | -40°C to +85°C | 8 μMAX      |
| MAX4437ESA   | -40°C to +85°C | 8 SO        |

Selector Guide appears at end of data sheet.

## Typical Operating Circuit

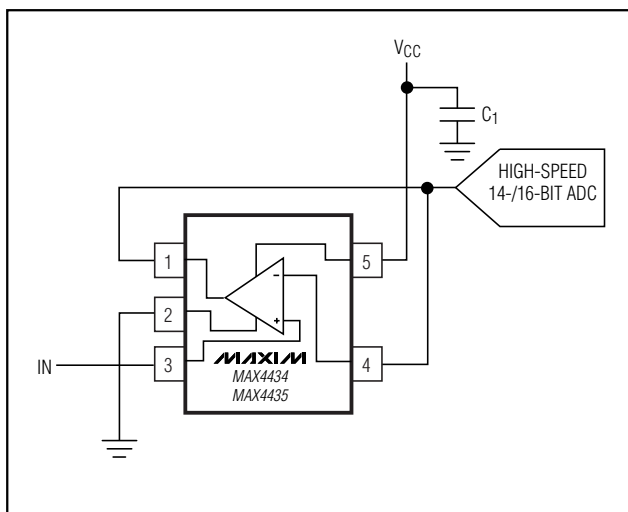

# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps

## ABSOLUTE MAXIMUM RATINGS

|                                                       |                                            |                                               |                 |
|-------------------------------------------------------|--------------------------------------------|-----------------------------------------------|-----------------|
| Supply Voltage ( $V_{CC} - V_{EE}$ )                  | +6V                                        | 8-Pin SO (derate 5.88mW/°C above +70°C)       | 471mW           |
| Differential Input Voltage                            | +2V                                        | 8-Pin $\mu$ MAX (derate 4.5mW/°C above +70°C) | 330mW           |
| Input Voltage Range                                   | ( $V_{CC} + 0.3V$ ) to ( $V_{EE} - 0.3V$ ) | Operating Temperature Range                   | -40°C to +85°C  |
| Current into Any Input Pin                            | $\pm 25mA$                                 | Junction Temperature                          | +150°C          |
| Output Short-Circuit Duration to $V_{CC}$ or $V_{EE}$ | (Note 1)                                   | Storage Temperature Range                     | -65°C to +150°C |
| Continuous Power Dissipation ( $T_A = +70^\circ C$ )  |                                            | Lead Temperature (soldering, 10s)             | +300°C          |
| 5-Pin SOT23 (derate 7.1mW/°C above +70°C)             | 571mW                                      |                                               |                 |

**Note 1:** The MAX4434-MAX4437 are not protected for output short-circuit conditions.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## DC ELECTRICAL CHARACTERISTICS

( $V_{CC} = +5V$ ,  $V_{EE} = 0$ ,  $R_L = \infty$  to  $V_{CC}/2$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 2)

| PARAMETER                                    | SYMBOL     | CONDITIONS                                                              | MIN               | TYP      | MAX          | UNITS            |
|----------------------------------------------|------------|-------------------------------------------------------------------------|-------------------|----------|--------------|------------------|
| Input Common-Mode Voltage Range              | $V_{CM}$   | Guaranteed by CMRR test                                                 | $V_{EE}$          |          | $V_{CC} - 1$ | V                |
| Input Offset Voltage                         | $V_{OS}$   |                                                                         |                   | 1        | 3.5          | mV               |
| Input Offset Voltage Temperature Coefficient | $TCV_{OS}$ |                                                                         |                   | 4        |              | $\mu V/^\circ C$ |
| Input Offset Voltage Matching                |            | MAX4436/MAX4437                                                         |                   | 0.25     |              | mV               |
| Input Bias Current                           | $I_B$      |                                                                         |                   | 14       | 22           | $\mu A$          |
| Input Offset Current                         | $I_{OS}$   |                                                                         |                   | 1        | 5            | $\mu A$          |
| Input Resistance                             | $R_{IN}$   | Differential Mode<br>$-10mV \leq V_{IN} \leq +10mV$                     |                   | 1        |              | k $\Omega$       |
|                                              |            | Common Mode<br>$0 \leq V_{CM} \leq (V_{CC} - 1V)$                       |                   | 1.7      |              | M $\Omega$       |
| Common-Mode Rejection Ratio                  | CMRR       | $V_{EE} \leq V_{CM} \leq (V_{CC} - 1V)$                                 | 75                | 100      |              | dB               |
| Open-Loop Gain                               | $A_{VOL}$  | $(V_{EE} + 0.25) \leq V_{OUT} \leq (V_{CC} - 0.25)$ , $R_L = 10k\Omega$ | 100               | 115      |              | dB               |
|                                              |            | $(V_{EE} + 0.5) \leq V_{OUT} \leq (V_{CC} - 0.5)$ , $R_L = 500\Omega$   | 96                | 110      |              |                  |
| Output Voltage Swing                         | $V_{OUT}$  | $R_L = 10k\Omega$                                                       | $V_{CC} - V_{OH}$ | 65       | 200          | mV               |
|                                              |            |                                                                         | $V_{OL} - V_{EE}$ | 15       | 70           |                  |
| Output Current                               | $I_{OUT}$  | $R_L = 20\Omega$ to Ground                                              | Sinking           | 40       | 65           | mA               |
|                                              |            |                                                                         | Sourcing          | 35       | 60           |                  |
| Output Short-Circuit Current                 | $I_{SC}$   | Sinking or sourcing                                                     |                   | $\pm 70$ |              | mA               |
| DC Power-Supply Rejection Ratio              | PSRR       | $V_{CC} = +4.5V$ to $+5.5V$                                             | 85                | 110      |              | dB               |
| Operating Supply Voltage                     | $V_S$      | Guaranteed by PSRR test                                                 | +4.5              |          | +5.5         | V                |
| Quiescent Supply Current (Per Amplifier)     | $I_S$      |                                                                         |                   | 15       | 18           | mA               |

**Note 2:** All devices are 100% production tested at +25°C. Specifications over temperature limits are guaranteed by design.

# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps

MAX4434-MAX4437

## AC ELECTRICAL CHARACTERISTICS

( $V_{CC} = +5V$ ,  $V_{EE} = 0$ ,  $V_{CM} = V_{CC}/2$ ,  $R_L = 500\Omega$ ,  $A_{VCL} = +1$ , and  $T_A = +25^\circ C$ , unless otherwise noted.)

| PARAMETER                                    | SYMBOL                | CONDITIONS                                                            | MIN | TYP | MAX | UNITS      |
|----------------------------------------------|-----------------------|-----------------------------------------------------------------------|-----|-----|-----|------------|
| Small-Signal -3dB Bandwidth                  | BW <sub>SS</sub>      | $V_{OUT} = 20mVp-p$<br>MAX4434/MAX4436                                |     | 150 |     | MHz        |
|                                              |                       | $V_{OUT} = 20mVp-p$<br>MAX4435/MAX4437 ( $A_{VCL} = +5$ )             |     | 150 |     |            |
| Large-Signal -3dB Bandwidth                  | BW <sub>LS</sub>      | $V_{OUT} = 2Vp-p$<br>MAX4434/MAX4436                                  |     | 28  |     | MHz        |
|                                              |                       | $V_{OUT} = 4Vp-p$<br>MAX4435/MAX4437 ( $A_{VCL} = +5$ )               |     | 25  |     |            |
| Small-Signal 0.1dB Gain Flatness             | BW <sub>0.1dBSS</sub> | $V_{OUT} = 20mVp-p$<br>MAX4434/MAX4436                                |     | 80  |     | MHz        |
|                                              |                       | $V_{OUT} = 20mVp-p$<br>MAX4435/MAX4437 ( $A_{VCL} = +5$ )             |     | 80  |     |            |
| Large-Signal 0.1dB Gain Flatness             | BW <sub>0.1dBLS</sub> | $V_{OUT} = 2Vp-p$<br>MAX4434/MAX4436                                  |     | 15  |     | MHz        |
|                                              |                       | $V_{OUT} = 4Vp-p$<br>MAX4435/MAX4437 ( $A_{VCL} = +5$ )               |     | 20  |     |            |
| Slew Rate                                    | SR                    | $V_{OUT} = 2V$ step<br>MAX4434/MAX4436                                |     | 133 |     | V/ $\mu s$ |
|                                              |                       | $V_{OUT} = 4V$ step<br>MAX4435/MAX4437 ( $A_{VCL} = +5$ )             |     | 388 |     |            |
| Rise/Fall Time                               | $t_R, t_F$            | $V_{OUT} = 2V$ step<br>MAX4434/MAX4436                                |     | 17  |     | ns         |
|                                              |                       | $V_{OUT} = 4V$ step<br>MAX4435/MAX4437 ( $A_{VCL} = +5$ )             |     | 10  |     |            |
| Settling Time to 16-Bit (0.0015%)            | $t_S 0.0015\%$        | $V_{OUT} = 1.5V$ to $3.5V$ step<br>MAX4434/MAX4436                    |     | 35  |     | ns         |
|                                              |                       | $V_{OUT} = 1.5V$ to $3.5V$ step<br>MAX4435/MAX4437 ( $A_{VCL} = +5$ ) |     | 23  |     |            |
|                                              |                       | $V_{OUT} = 1V$ to $4V$ step<br>MAX4434/MAX4436                        |     | 42  |     |            |
| Output "Glitch" Settling to 16-Bit (0.0015%) |                       | 5pF load, $C_L$ charged from 1V to 4V                                 |     | 41  |     | ns         |
| Output Overload Recovery Time                |                       | 50% overdrive, settling to 10% accuracy                               |     | 100 |     | ns         |
| AC Common-Mode Rejection Ratio               | CMRR                  | $f_C = 100kHz$                                                        |     | -92 |     | dB         |

# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps




## AC ELECTRICAL CHARACTERISTICS (continued)

( $V_{CC} = +5V$ ,  $V_{EE} = 0$ ,  $V_{CM} = V_{CC}/2$ ,  $R_L = 500\Omega$ ,  $A_{VCL} = +1$ , and  $T_A = +25^\circ C$ , unless otherwise noted.)

| PARAMETER                                              | SYMBOL    | CONDITIONS                                  | MIN            | TYP  | MAX | UNITS          |
|--------------------------------------------------------|-----------|---------------------------------------------|----------------|------|-----|----------------|
| AC Power-Supply Rejection Ratio                        | PSRR      | $f_C = 100kHz$                              |                | -101 |     | dB             |
| Spurious-Free Dynamic Range                            | SFDR      | $V_{OUT} = 2V_{p-p}$ centered at $V_{CC}/2$ | $f_C = 100kHz$ | -97  |     | dBc            |
|                                                        |           |                                             | $f_C = 1MHz$   | -98  |     |                |
|                                                        |           | $V_{OUT} = 3V_{p-p}$ centered at $V_{CC}/2$ | $f_C = 100kHz$ | -130 |     |                |
|                                                        |           |                                             | $f_C = 1MHz$   | -99  |     |                |
|                                                        |           | $V_{OUT} = 4V_{p-p}$ centered at $V_{CC}/2$ | $f_C = 100kHz$ | -112 |     |                |
|                                                        |           |                                             | $f_C = 1MHz$   | -97  |     |                |
| Input Noise Voltage Density                            | $e_n$     | $f_C = 100kHz$                              |                | 2.2  |     | $nV/\sqrt{Hz}$ |
| Input Noise Current Density                            | $i_n$     | $f_C = 100kHz$                              |                | 2.0  |     | $pA/\sqrt{Hz}$ |
| Input Capacitance                                      | $C_{IN}$  |                                             |                | 2.3  |     | pF             |
| Maximum Capacitive Load Without Sustained Oscillations |           |                                             |                | 30   |     | pF             |
| Output Impedance                                       | $Z_{OUT}$ | $f_C = 1MHz$                                |                | 0.05 |     | $\Omega$       |
| Crosstalk                                              |           | $f_C = 1MHz$ , MAX4436/MAX4437              |                | -80  |     | dB             |

## Typical Operating Characteristics

( $V_{CC} = +5V$ ,  $V_{EE} = 0$ ,  $R_L = 500\Omega$ ,  $C_L = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

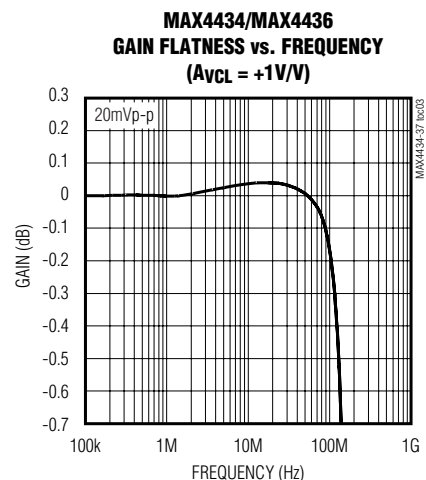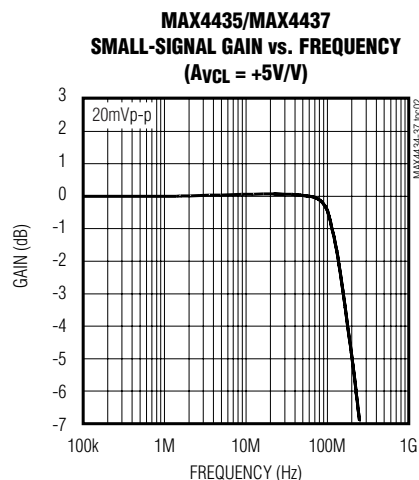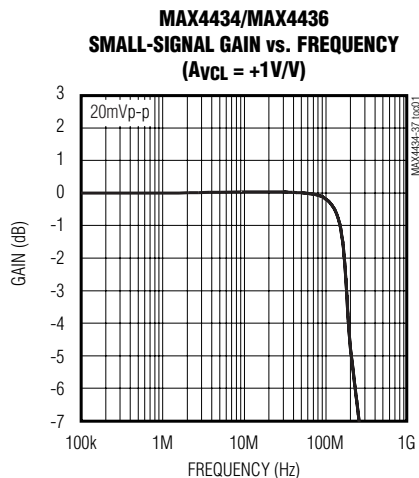


# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps


## Typical Operating Characteristics (continued)

( $V_{CC} = +5V$ ,  $V_{EE} = 0$ ,  $R_L = 500\Omega$ ,  $C_L = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)


**MAX4434/MAX4436**  
GAIN FLATNESS vs. FREQUENCY  
( $A_{VCL} = +1V/V$ )

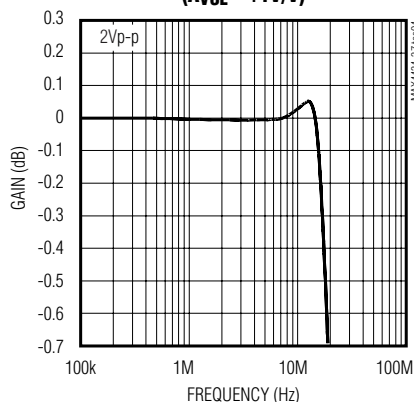


**MAX4435/MAX4437**  
GAIN FLATNESS vs. FREQUENCY  
( $A_{VCL} = +5V/V$ )

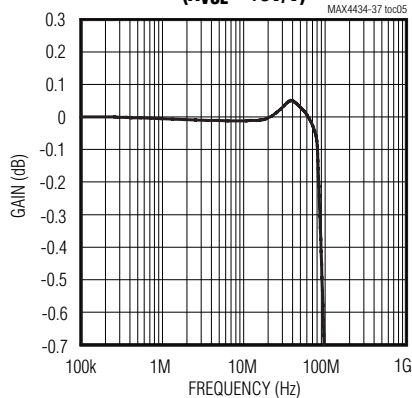


**MAX4435/MAX4437**  
GAIN FLATNESS vs. FREQUENCY  
( $A_{VCL} = +5V/V$ )

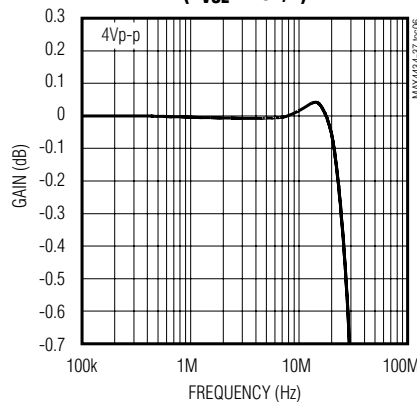


**MAX4434/MAX4436**  
LARGE-SIGNAL GAIN vs. FREQUENCY  
( $A_{VCL} = +1V/V$ )

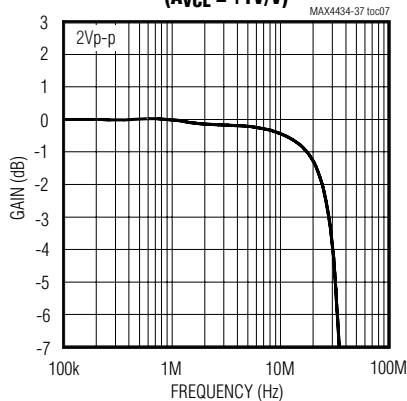


**MAX4435/MAX4437**  
LARGE-SIGNAL GAIN vs. FREQUENCY  
( $A_{VCL} = +5V/V$ )

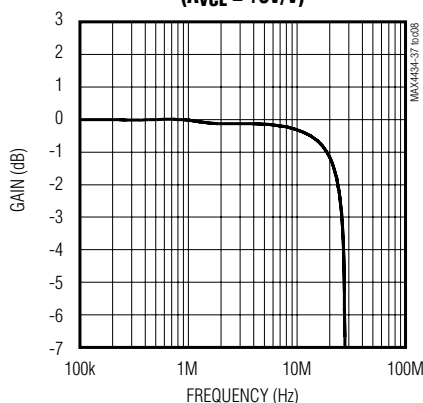


**MAX4434/MAX4436**  
SMALL-SIGNAL PULSE RESPONSE

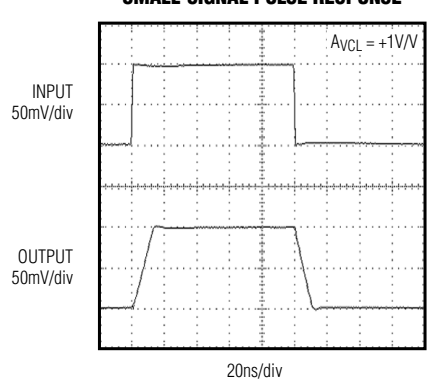


**MAX4435/MAX4437**  
SMALL-SIGNAL PULSE RESPONSE

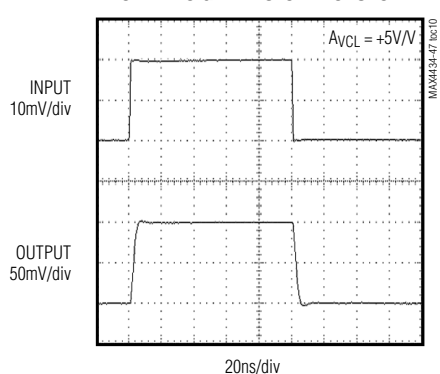

**MAX4434/MAX4436**  
LARGE-SIGNAL PULSE RESPONSE

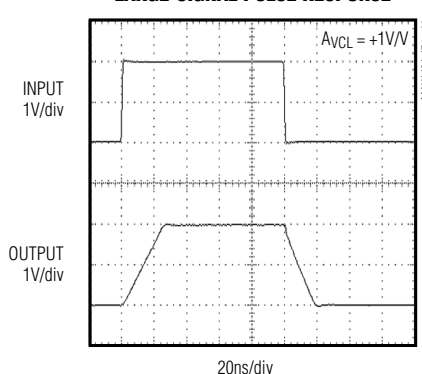

**MAX4435/MAX4437**  
LARGE-SIGNAL PULSE RESPONSE

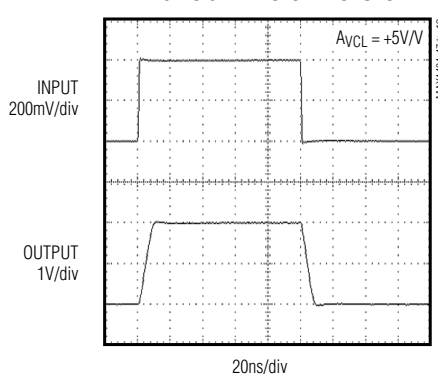


# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps


## Typical Operating Characteristics (continued)

( $V_{CC} = +5V$ ,  $V_{EE} = 0$ ,  $R_L = 500\Omega$ ,  $C_L = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)


**MAX4434/MAX4436  
SMALL-SIGNAL PULSE RESPONSE**

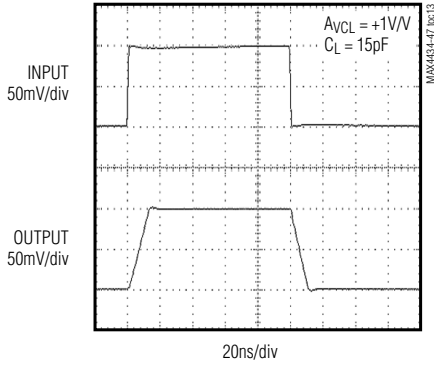


**MAX4435/MAX4437  
SMALL-SIGNAL PULSE RESPONSE**

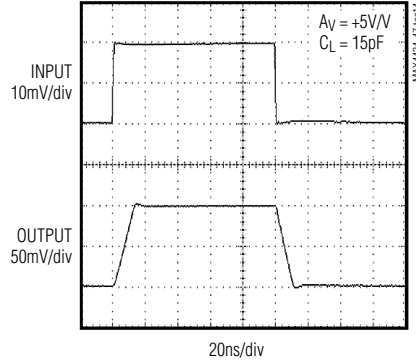


**MAX4434/MAX4436  
LARGE-SIGNAL PULSE RESPONSE**

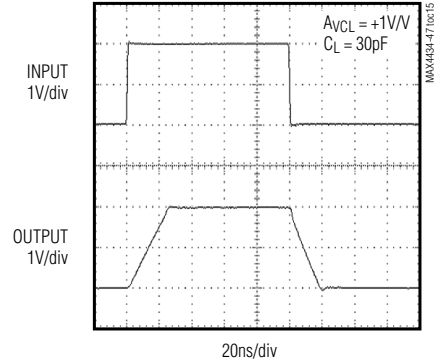


**MAX4435/MAX4437  
LARGE-SIGNAL PULSE RESPONSE**

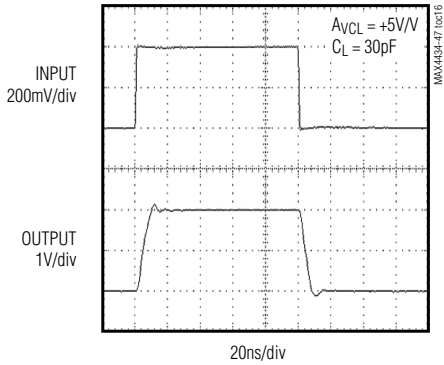


**POWER-SUPPLY REJECTION RATIO  
vs. FREQUENCY**

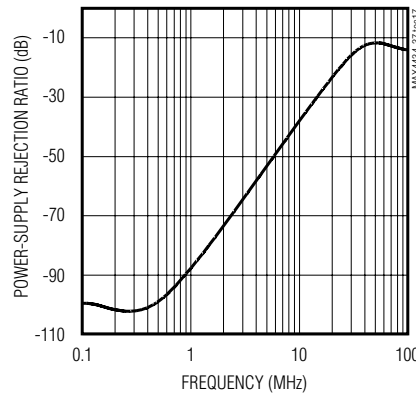


**COMMON-MODE REJECTION RATIO  
vs. FREQUENCY**

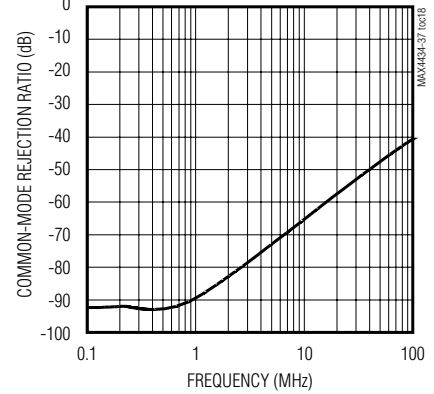


**OUTPUT ISOLATION RESISTANCE  
vs. CAPACITIVE LOAD**

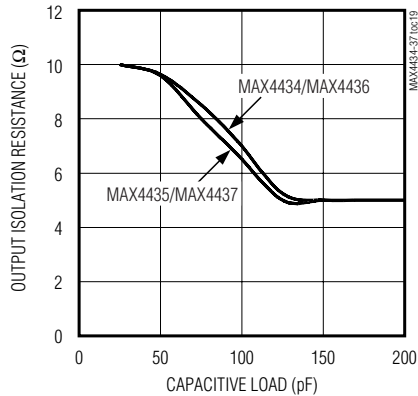

**CLOSED-LOOP OUTPUT IMPEDANCE  
vs. FREQUENCY**

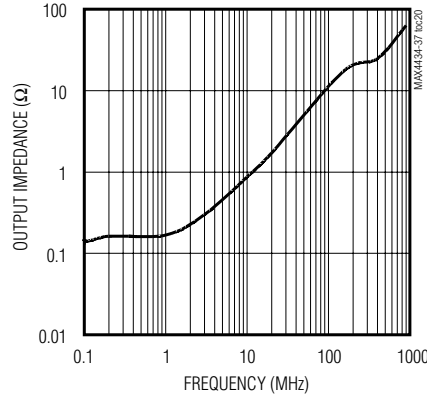










**GAIN AND PHASE vs. FREQUENCY**

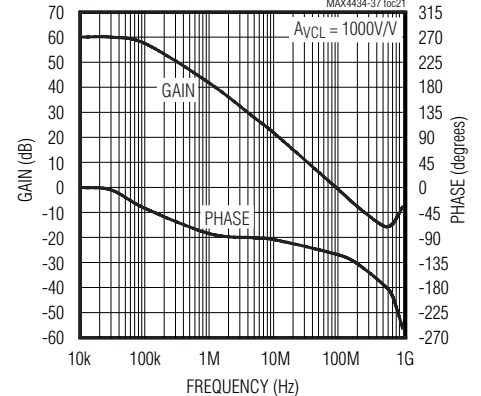

# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps

## Typical Operating Characteristics (continued)

( $V_{CC} = +5V$ ,  $V_{EE} = 0$ ,  $R_L = 500\Omega$ ,  $C_L = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

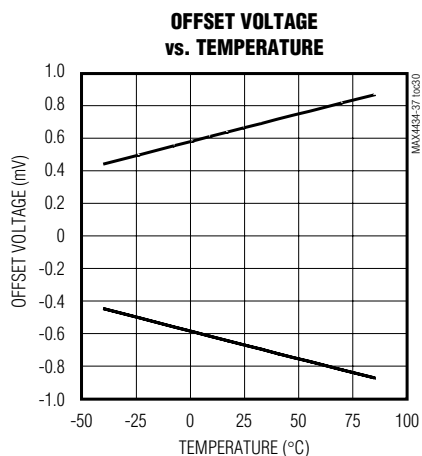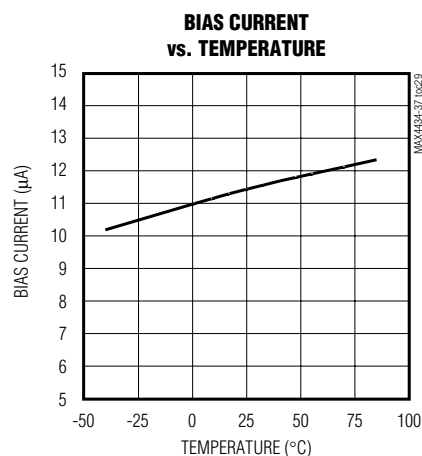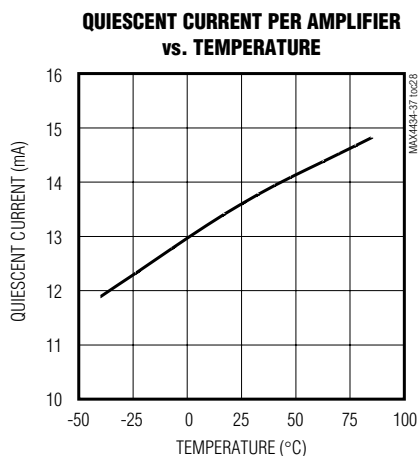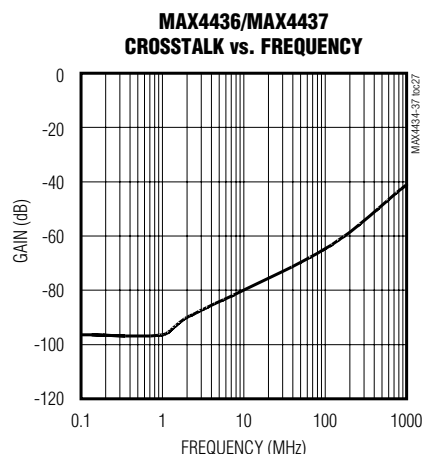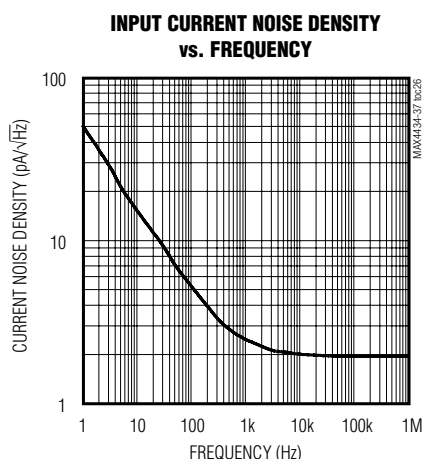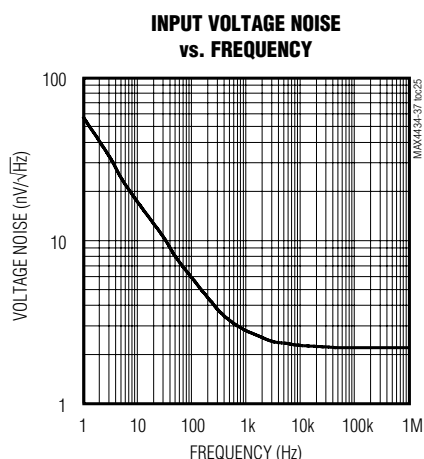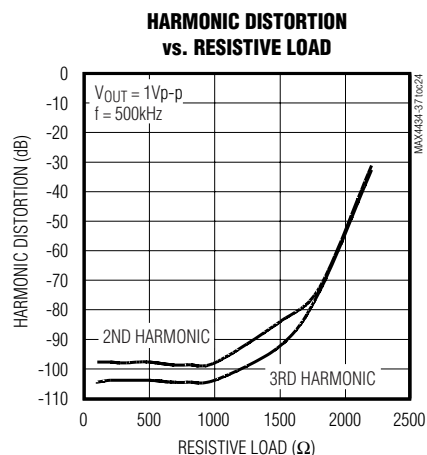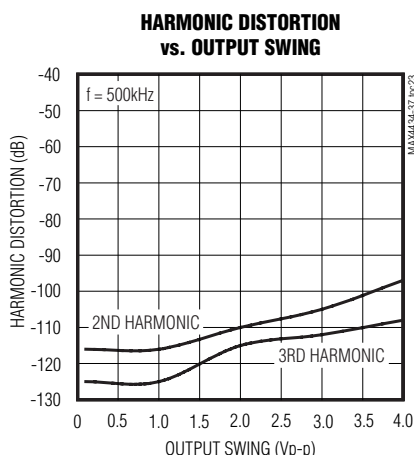
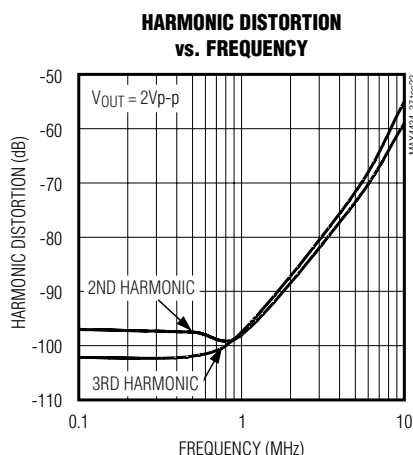


MAX4434-MAX4437

# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps

## Typical Operating Characteristics (continued)

(VCC = +5V, VEE = 0, RL = 500Ω, CL = 0, TA = +25°C, unless otherwise noted.)

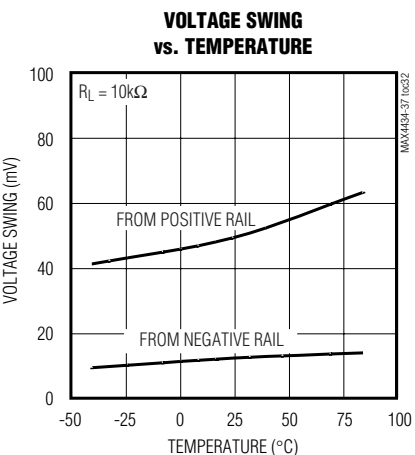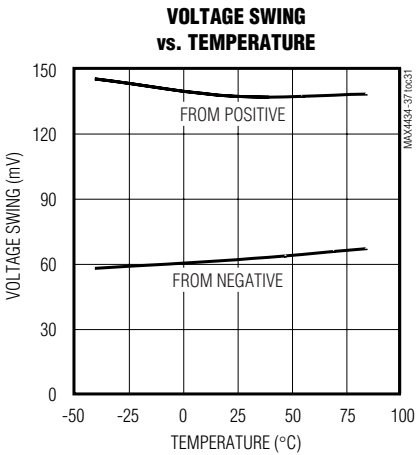

## Pin Description

| PIN             |         | NAME            | FUNCTION                                 |
|-----------------|---------|-----------------|------------------------------------------|
| MAX4434/MAX4435 |         |                 |                                          |
| SOT23           | SO      |                 |                                          |
| 1               | 6       | OUT             | Output                                   |
| 2               | 4       | V <sub>EE</sub> | Ground                                   |
| 3               | 3       | IN+             | Noninverting Input                       |
| 4               | 2       | IN-             | Inverting Input                          |
| 5               | 7       | V <sub>CC</sub> | Positive Power Supply                    |
| —               | 1, 5, 8 | N.C.            | No Connection. Not internally connected. |

| PIN             | NAME | FUNCTION                       |
|-----------------|------|--------------------------------|
| MAX4436/MAX4437 |      |                                |
| SO/μMAX         |      |                                |
| 1               | OUTA | Amplifier A Output             |
| 2               | INA- | Amplifier A Inverting Input    |
| 3               | INA+ | Amplifier A Noninverting Input |
| 4               | VEE  | Ground                         |
| 5               | INB+ | Amplifier A Noninverting Input |
| 6               | INB- | Amplifier A Inverting Input    |
| 7               | OUTB | Amplifier A Output             |
| 8               | VCC  | Positive Power Supply          |



# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps

## Detailed Description

The MAX4434-MAX4437 are wide-bandwidth, ultra-low-distortion, voltage-feedback amplifiers. The MAX4434/MAX4436 are internally compensated for unity gain. The MAX4435/MAX4437 are internally compensated for gains of +5V/V or greater.

These amplifiers have ultra-fast 35ns (MAX4434/MAX4436) 16-bit settling times, -97dB SFDR at 1MHz, and 4Vp-p output swing with minimum 115dB open-loop gain.

### High-Speed ADC Input Driver Application

The MAX4434-MAX4437 op amps are ideal for driving high-speed 14- to 16-bit ADCs. In most cases, these ADCs operate with a charge balance scheme, with capacitive loads internally switched on and off from the input. The driver used must withstand these changing capacitive loads while holding the signal amplitude stability consistent with the ADC's resolution and, at the same time, have a frequency response compatible with the sampling speed of the ADC (Figure 1).

### Inverting and Noninverting Configurations

The circuits typically used for the inverting and noninverting configurations of the MAX4434-MAX4437 are shown in Figures 2a and 2b. The minimum unconditionally stable gain values are 1 for the MAX4434/MAX4436

and 5 for the MAX4435/MAX4437. Use care in selecting the value for the resistor marked  $R_S$  in both circuits. From dynamic stability considerations (based on the part's frequency response and the input capacitance of the MAX4434-MAX4437), the maximum recommended value for  $R_S$  is 500 $\Omega$ . In general, lower  $R_S$  values will yield a higher bandwidth and better dynamic stability, at the cost of higher power consumption, higher power dissipation in the IC, and reduced output drive availability. For a minimum  $R_S$  value, take into consideration that the current indicated as  $I_F$  is supplied by the output stage and must be discounted from the maximum output current to calculate the maximum current available to the load.  $I_F$  can be found using the following equation:

$$I_F = V_{IN(MAX)} / R_S$$

If DC thermal stability is an important design concern, the Thevenin resistance seen by both inputs at DC must be balanced. This includes the resistance of the signal source and termination resistors if the amplifier signal input is fed from a transmission line. The capacitance associated with the feedback resistors must also be considered as a possible limitation to the available bandwidth or to the dynamic stability. Only resistors with small parallel capacitance specifications should be considered.

## Applications Information

### Layout and Power-Supply Bypassing

The MAX4434-MAX4437 have wide bandwidth and consequently require careful board layout. To realize the full AC performance of these high-speed amplifiers, pay careful attention to power-supply bypassing and board layout. The PC board should have a large low-impedance ground plane that is as free of voids as possible. Do not use commercial breadboards. Keep signal lines as short and straight as possible. Observe high-frequency bypassing techniques to maintain the amplifier's accuracy and stability. In general, use sur-

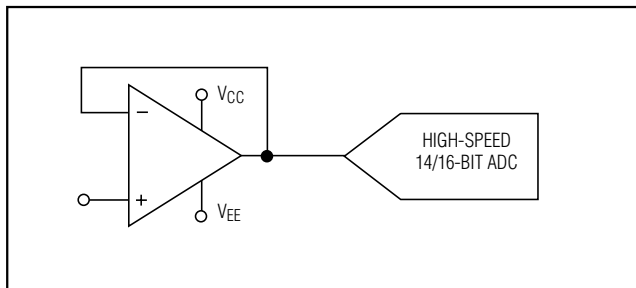


Figure 1. Typical Application Circuit

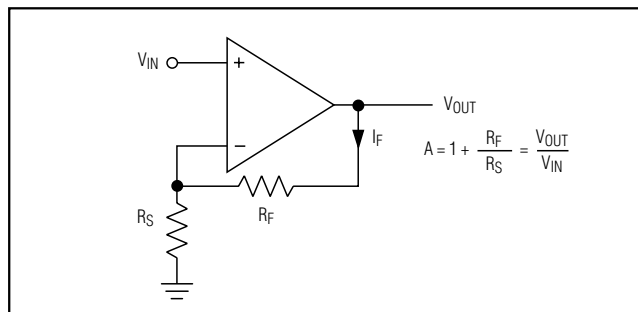


Figure 2a. Noninverting Configuration

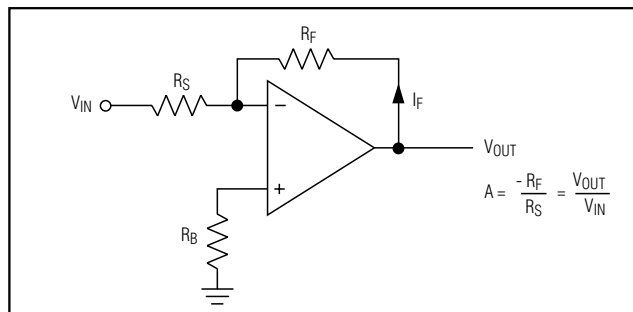


Figure 2b. Inverting Configuration

# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps

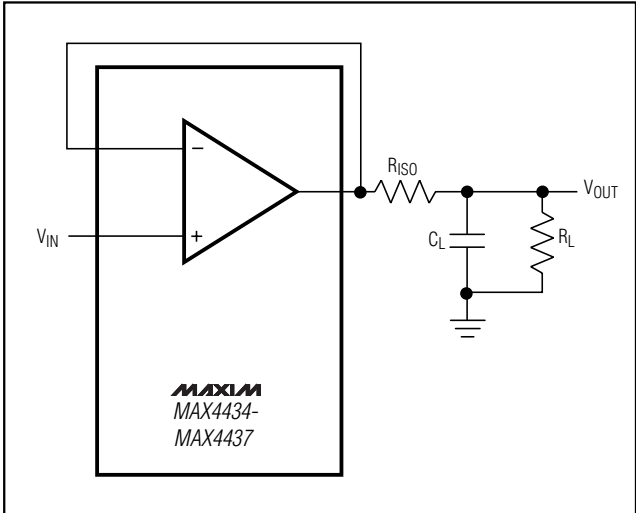


Figure 3. Capacitive-Load Driving Circuit

face-mount components since they have shorter bodies and lower parasitic reactance. This will result in improved performance over through-hole components. The bypass capacitors should include 1nF and/or 0.1μF surface-mount ceramic capacitors between V<sub>CC</sub> and the ground plane, located as close to the package as possible. Place a 10μF tantalum capacitor at the power supply's point of entry to the PC board to ensure the integrity of the incoming supplies. Input termination resistors and output back-termination resistors, if used, should be surface-mount types and should be placed as close to the IC pins as possible.


### Driving Capacitive Loads

The MAX4434-MAX4437 can drive capacitive loads. However, excessive capacitive loads may cause ringing or instability at the output as phase margin is reduced. Adding a small isolation resistor in series with the output capacitive load helps reduce the ringing but slightly increases gain error (see *Typical Operating Characteristics* and Figure 3).

### Selector Guide

| PART    | AMPS | MIN GAIN STABLE (V/V) | BW (MHz) | SETTLING TIME TO 0.0015% (ns) |
|---------|------|-----------------------|----------|-------------------------------|
| MAX4434 | 1    | +1                    | 150      | 35                            |
| MAX4435 | 1    | +5                    | 150      | 23                            |
| MAX4436 | 2    | +1                    | 150      | 35                            |
| MAX4437 | 2    | +5                    | 150      | 23                            |

### Pin Configurations (continued)

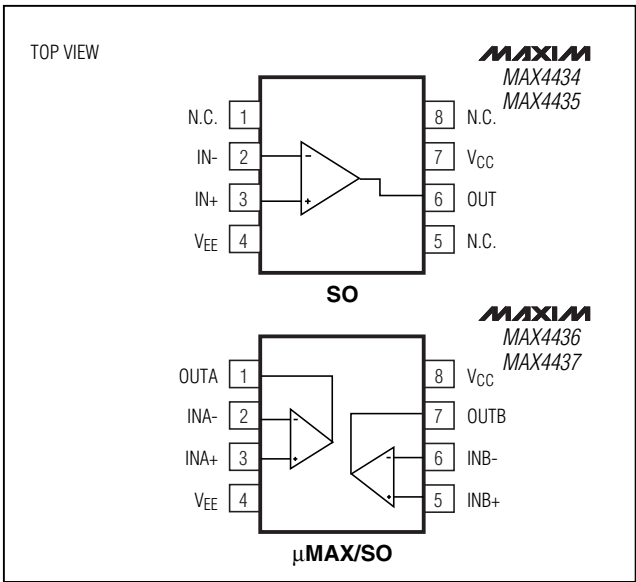

### Chip Information



MAX4434/MAX4435 TRANSISTOR COUNT: 141

MAX4436/MAX4437 TRANSISTOR COUNT: 318

# Single-Supply, 150MHz, 16-Bit Accurate, Ultra-Low Distortion Op Amps

## Package Information

MAX4434-MAX4437

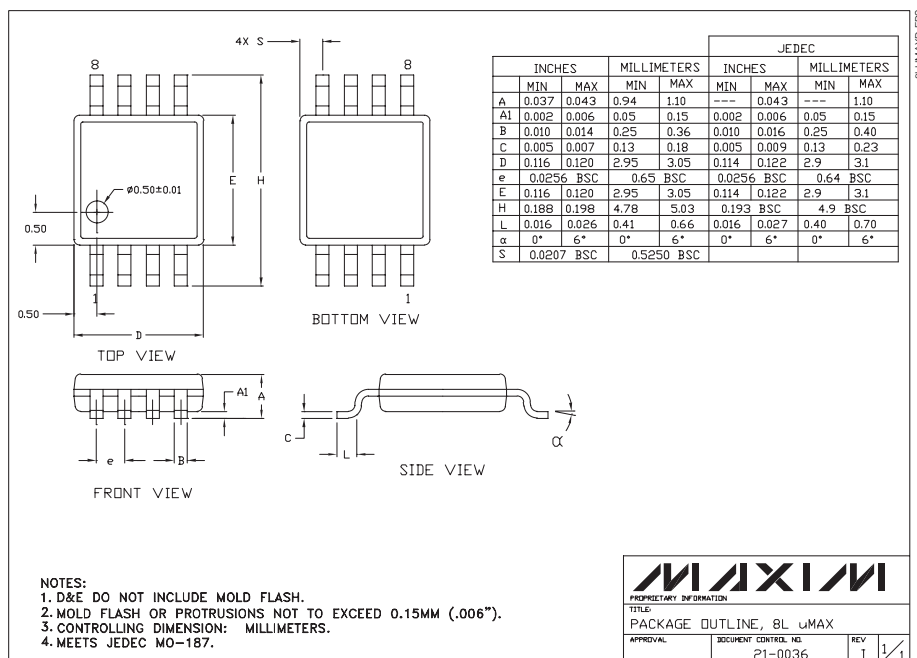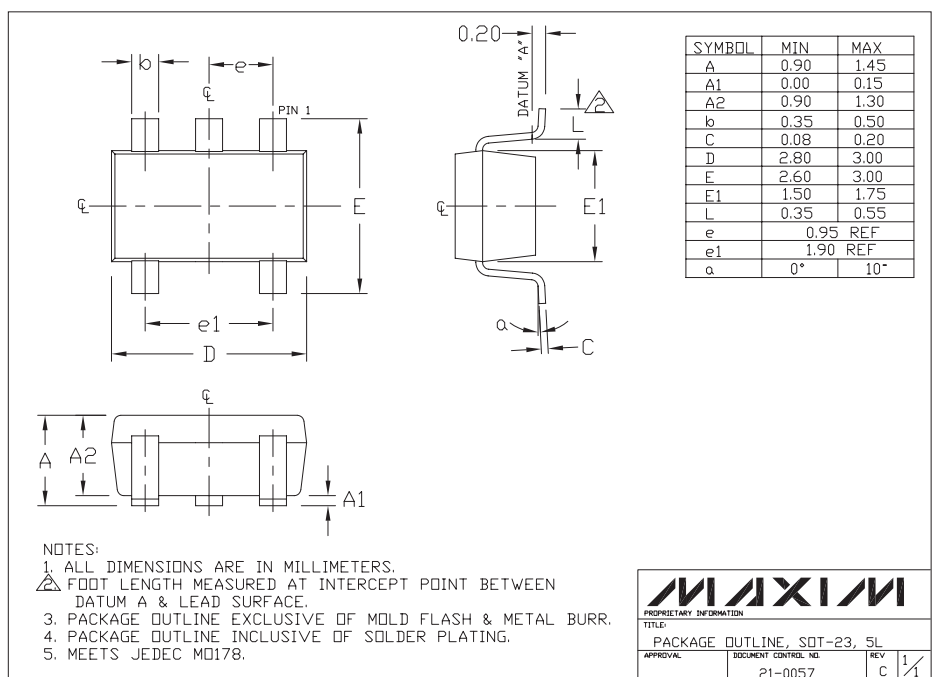

Single-Supply, 150MHz, 16-Bit Accurate,  
Ultra-Low Distortion Op Amps

Package Information (continued)

SOIC

|    | INCHES |       | MILLIMETERS |      |
|----|--------|-------|-------------|------|
|    | MIN    | MAX   | MIN         | MAX  |
| A  | 0.053  | 0.069 | 1.35        | 1.75 |
| A1 | 0.004  | 0.010 | 0.10        | 0.25 |
| B  | 0.014  | 0.019 | 0.35        | 0.49 |
| C  | 0.007  | 0.010 | 0.19        | 0.25 |
| e  | 0.050  |       | 1.27        |      |
| E  | 0.150  | 0.157 | 3.80        | 4.00 |
| H  | 0.228  | 0.244 | 5.80        | 6.20 |
| h  | 0.010  | 0.020 | 0.25        | 0.50 |
| L  | 0.016  | 0.050 | 0.40        | 1.27 |

|   | INCHES |       | MILLIMETERS |       |    |       |
|---|--------|-------|-------------|-------|----|-------|
|   | MIN    | MAX   | MIN         | MAX   | N  | MS012 |
| D | 0.189  | 0.197 | 4.80        | 5.00  | 8  | A     |
| D | 0.337  | 0.344 | 8.55        | 8.75  | 14 | B     |
| D | 0.386  | 0.394 | 9.80        | 10.00 | 16 | C     |

NOTES:  
1. D&E DO NOT INCLUDE MOLD FLASH  
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")  
3. LEADS TO BE COPLANAR WITHIN .102mm (.004")  
4. CONTROLLING DIMENSION: MILLIMETER  
5. MEETS JEDEC MS012-XX AS SHOWN IN ABOVE TABLE  
6. N = NUMBER OF PINS

120 SAN GABRIEL DR. SUNNYVALE, CA 94086 FAX (408) 737-7704  
PROPRIETARY INFORMATION

PACKAGE FAMILY OUTLINE: SOIC .150"

1/1

21-0041 A

DOCUMENT CONTROL NUMBER REV

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600