



MMC 4098

DUAL MONOSTABLE MULTIVIBRATOR

GENERAL DESCRIPTION

The MMC 4098 is a monolithic integrated circuit, available in 16-lead dual in-line plastic or ceramic package. The MMC 4098 dual monostable multivibrator provides stable retriggerable/resettable one-shot operation for any fixed-voltage timing application. An external resistor (R_x) and an external capacitor (C_x) control the timing for the circuit. Adjustment of R_x and C_x provides a wide range of output pulse widths from the Q and \bar{Q} terminals. The time delay from trigger input to output transition (trigger propagation delay) and the time delay from reset input to output transition (reset propagation delay) are independent of R_x and C_x .

Leading-edge-triggering (+TR) and trailing-edge-triggering (-TR) inputs are provided for triggering from either edge of an input pulse. An unused +TR input should be tied to V_{SS} . An unused -TR input should be tied to V_{DD} . A RESET (on low level) is provided for immediate termination of the output pulse or to prevent output pulses when power is turned on. An unused RESET input should be tied to V_{DD} . However, if an entire section of the MMC 4098 is not used, its RESET should be tied to V_{SS} . See Table I. In normal operation the circuit triggers (extends the output pulse one period) on the application of each new trigger pulse. For operation in the non-trigger-

ble mode, Q is connected to -TR when leading-edge triggering(+TR) is used or Q is connected to +TR when trailing-edge triggering (-TR) is used. The time period (T) for this multivibrator can be approximated by: $T_x = \frac{1}{2} R_x C_x$ for $C_x \geq 0.01\mu F$. Values of T

vary from unit to unit and as a function of voltage, temperature, and R_x , C_x . The minimum value of external resistance, R_x , is 5 k Ω . The maximum value of external capacitance, C_x , is 100 μF . The output pulse width has variations of $\pm 2.5\%$ typically over the temperature range of -55°C to 125°C for $C_x = 1000\text{ pF}$ and $R_x = 100\text{ k}\Omega$.

For power supply variations of $\pm 5\%$, the output pulse width has variations of $\pm 0.5\%$ typically, for $V_{DD} = 10\text{ V}$ and 15 V and $\pm 1\%$ typically, for $V_{DD} = 5\text{ V}$ at $C_x = 1000\text{ pF}$ and $R_x = 5\text{ k}\Omega$.

FEATURES

- Retriggerable/resettable capability
- Trigger and reset propagation delays independent of R_x, C_x
- Triggering from leading or trailing edge
- Q and \bar{Q} buffered outputs available
- Separate resets
- Wide range of output-pulse widths

ABSOLUTE MAXIMUM RATINGS


V_{DD}^*	Supply voltage: G and H types E and F types	-0.5 to -0.5 to -0.5 to	20 18 $V_{DD} + 0.5$	V
V_i	Input voltage	± 10	mA	
I_{I}	DC input current (any one input)	± 10	mA	
P_{tot}	Total power dissipation (per package)	200	mW	
	Dissipation per output transistor for $T_A =$ full package-temperature range	100	mW	
T_A	Operating temperature : G and H types E and F types	-55 to -40 to	125 85	°C
T_{stg}	Storage temperature	-65 to	150	°C

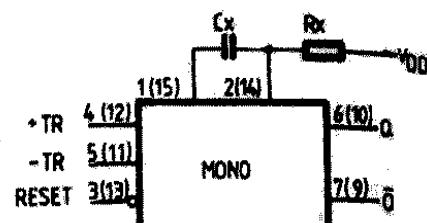
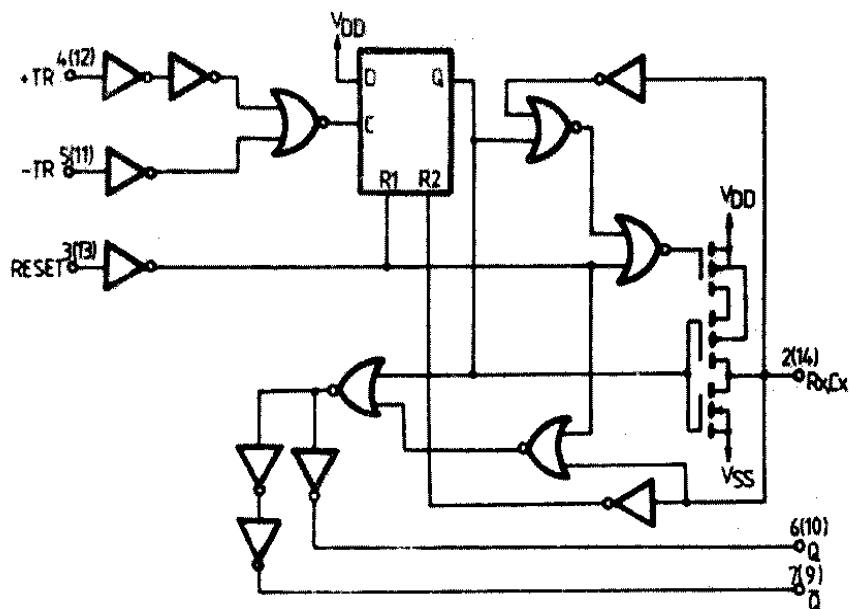
* All voltage values are referred to V_{SS} pin voltage

RECOMMENDED OPERATING CONDITIONS

V_{DD}^*	Supply voltage: G and H types E and F types	3 to 3 to	18 15	V
V_i	Input voltage	0 to	V_{DD}	V
T_A	Operating temperature : G and H types E and F types	-55 to -40 to	125 85	°C

CONNECTION DIAGRAM



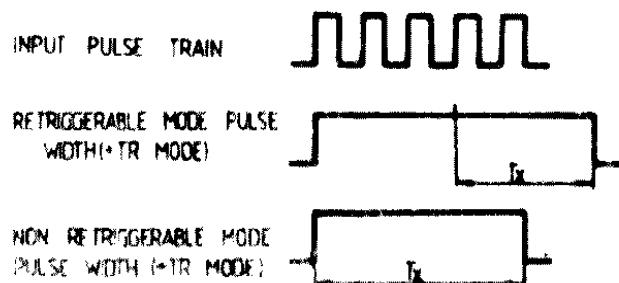
LOGIC DIAGRAM**FUNCTIONAL DIAGRAM****TABLE I**

— Functional terminal connections

FUNCTION	TERMINAL CONNECTIONS						OTHER CON-NECTIONS	
	TO	VDD	TO	V _{SS}	INPUT PULSE TO			
	Mono (1)	Mono (2)	Mono (1)	Mono (2)	Mono (1)	Mono (2)	Mono (1)	Mono (2)
Leading-Edge Trigger / Retriggerable	3.5	11,13			4	12		
Leading-Edge Trigger / Non-retriggerable	3	13			4	12	5,7	11,9
Trailing-Edge Trigger / Retriggerable	3	13	4	12	5	11		
Trailing-Edge Trigger / Non-retriggerable	3	13			5	11	4,6	12,10
Unused Section	5	11	3,4	12,13				

NOTES: 1) A Retriggerable one-shot multivibrator has an output pulse width which is extended one full time period (T_x) after application of the last trigger pulse.

2) A Non-retriggerable one-shot multivibrator has a time period T_x referenced from the application of the first trigger pulse.



STATIC ELECTRICAL CHARACTERISTICS

(over recommended operating conditions)

PARAMETER		TEST CONDITIONS				VALUES						UNIT		
		V _I (V)	V _O (V)	I _{IO} I (μA)	V _{DD} (V)	T _{LOW} *		25°C			T _{HIGH} *			
						min.	max.	min.	typ	max.	min.	max.		
I _L	Quiescent current G, H types	0/ 5			5		1		0.02	1		30		
		0/10			10		2		0.02	2		60		
		0/15			15		4		0.02	4		120		
		0/20			20		20		0.04	20		600	μA	
	E, F types	0 / 5			5		4		0.02	4		30		
		0/10			10		8		0.02	8		60		
V _{OH}	Output high voltage	0/ 5		< 1	5	4.95		4.95			4.95			
		0/10		< 1	10	9.95		9.95			9.95		V	
		0/15		< 1	15	14.95		14.95			14.95			
V _{OL}	Output low voltage	5 / 0		< 1	5		0.05			0.05		0.05		
		10/0		< 1	10		0.05			0.05		0.05	V	
		15/0		< 1	15		0.05			0.05		0.05		
V _{IH}	Input high voltage		0.5/4.5	< 1	5	3.5		3.5			3.5			
			1/9	< 1	10	7		7			7		V	
			1.5/13.5	< 1	15	11		11			11			
V _{IL}	Input low voltage		4.5/0.5	< 1	5		1.5			1.5		1.5		
			9/1	< 1	10		3			3		3	V	
			13.5/1.5	< 1	15		4			4		4		
I _{OH}	Output drive current G, H types	0 / 5	2.5		5	-2		-1.6	-3.2		-1.15			
		0 / 5	4.6		5	-0.64		-0.51	-1		-0.36			
		0/10	9.5		10	-1.6		-1.3	-2.6		-0.9			
		0/15	13.5		15	-4.2		-3.4	-6.8		-2.4		mA	
	E, F types	0 / 5	2.5		5	-1.53		-1.36	-3.2		-1.1			
		0 / 5	4.6		5	-0.52		-0.44	-1		-0.36			
		0/10	9.5		10	-1.3		-1.1	-2.6		-0.9			
		0/15	13.5		15	-3.6		-3.0	-6.8		-2.4			
I _{OL}	Output sink current G, H types	0 / 5	0.4		5	0.64		0.51	1		0.36			
		0/10	0.5		10	1.6		1.3	2.6		0.3			
		0/15	1.5		15	4.2		3.4	6.8		2.4		mA	
	E, F types	0 / 5	0.4		5	0.52		0.44	1		0.36			
		0/10	0.5		10	1.3		1.1	2.6		0.9			
		0/15	1.5		15	3.6		3.0	6.8		2.4			
I _{IH} , I _{IL}	Input leakage current G, H types	0/18	Any input			18		±0.1		±10 ⁻⁵	±0.1		±1	
		0/15				15		±0.3		±10 ⁻⁵	±0.3		±1	μA
C _i	Input capacitance		Any input							5	75		pF	

• T_{LOW} = -55°C for G, H devices; -40°C for E, F devices.• T_{HIGH} = +125°C for G, H devices; +85°C for E, F devices.

The Noise Margin for both "1" and "0" level is:

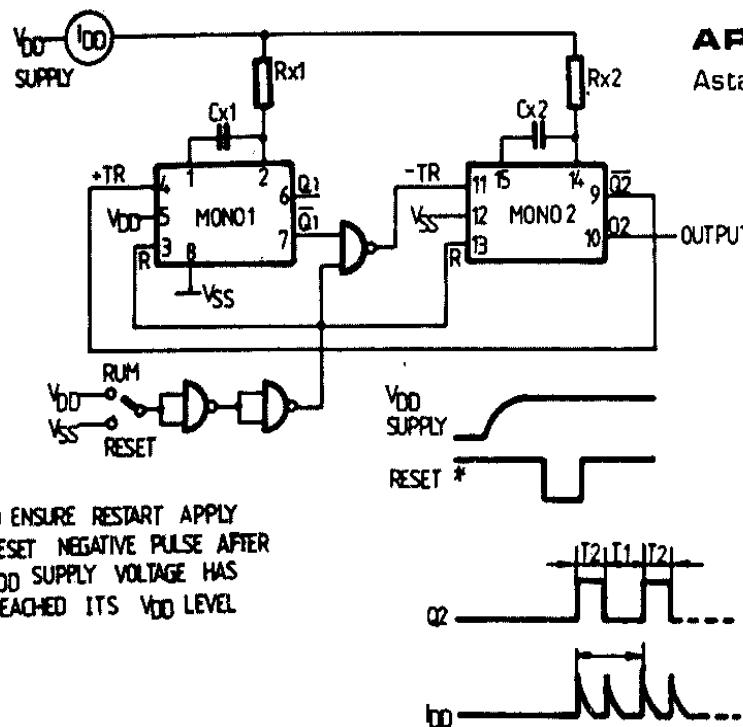
1 V min. with V_{DD} = 5 V2 V min. with V_{DD} = 10 V2.5 V min. with V_{DD} = 15 V

DYNAMIC ELECTRICAL CHARACTERISTICS

($T_{amb} = 25^\circ\text{C}$, $C_L = 50 \text{ pF}$, $R_L = 200 \text{ k}\Omega$, typical temperature coefficient for all V_{DD} values is $0.3\%/\text{ }^\circ\text{C}$, all input rise and fall time = 20 ns)

PARAMETER	TEST CONDITIONS			VALUES			UNIT
	$R_X (\text{k}\Omega)$	$C_X (\text{pF})$	$V_{DD} (\text{V})$	Min.	Typ.	Max.	
t_{PLH} Trigger propagation delay	5 to 10 000	≥ 15	5 10 15		250 125 100	500 250 200	
t_{PHL} time (+TR, -TR to Q, \bar{Q})							ns
t_{WH} Trigger pulse width	5 to 10 000	≥ 15	5 10 15	140 60 40	70 30 20		
t_{WL}							ns
t_{TLH} Transition time	5 to 10 000	≥ 15	5 10 15		100 50 40	200 100 80	
t_{THL} Transition time	5 to 10 000	15 to 10 000	5 10 15		100 50 40	200 100 80	
	5 to 10 000	0.01 μF to 0.1 μF	5 10 15		150 75 65	300 150 130	
	5 to 10 000	0.1 μF to 1 μF	5 10 15		250 150 80	500 300 160	
t_{PLH} Propagation delay time	5 to 10 000	≥ 15	5 10 15		225 125 75	450 250 150	
t_{PHL} (Reset)							ns
t_{WR} Pulse width (Reset)				5 10 15	200 80 60	100 40 30	
				5 10 15	1 200 600 500	600 300 250	
				5 10 15	50 30 20	25 15 10	
				0.1 μF			μs
t_r (TR) Rise or fall time (Trigger)			5 to 15			100	μs

PARAMETER	TEST CONDITIONS			VALUES			UNIT
	R _X (kΩ)	C _X (pF)	V _{DD} (V)	Min.	Typ.	Max.	
Pulse width match between circuits in same package	10	10 000	5		5	10	%
			10		7.5	15	
			15		7.5	15	

**APPLICATIONS**

Astable multivibrator with restart after reset capability

R _X	I _{DD} (Avg)	T _X (T ₁ +T ₂)	V _{DD}
10 kΩ	1 mA / 0.05 mA	3.8 μs / 0.5 s	5 V
	2.5 mA / 0.5 mA	3.2 μs / 0.5 s	
10 MΩ	5 mA / 1 mA	3 μs / 0.5 s	15 V

NOTE:
ALL VALUES ARE TYPICAL
C_X RANGE: 0,0001 μF TO
0,1 μF

Pulse delay

