

## LOW CAPACITANCE TVS ARRAY

### APPLICATIONS

- ✓ Computer Notebooks
- ✓ Communication Systems & Cellular Phones
- ✓ Printers
- ✓ Personal Digital Assitant(PDA)
- ✓ Video Equipment

### IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns

### FEATURES


- ✓ 25 Watts Peak Pulse Power per Line ( $t_p=8/20\mu s$ )
- ✓ Monolithic Structure
- ✓ Available in 5 Volts
- ✓ Low Clamping Voltage
- ✓ ESD Protection > 40 kilovolts
- ✓ Low Leakage Current
- ✓ Low Capacitance: 9pF
- ✓ Protects Three (3) Bidirectional Lines and Four (4) Unidirectional Lines
- ✓ RoHS Compliant

### MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SOT-553 Package
- ✓ Weight 3 milligrams (Approximate)
- ✓ Available in Lead-Free Nickel-Paladium-Gold Plating
- ✓ Solder Reflow Temperature:  
Nickel-Paladium-Gold (Ni/Pd/Au) Sn/Ag/Cu: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481
- ✓ Marking: Marking Code & Pin One Defined By Dot on Top of Package

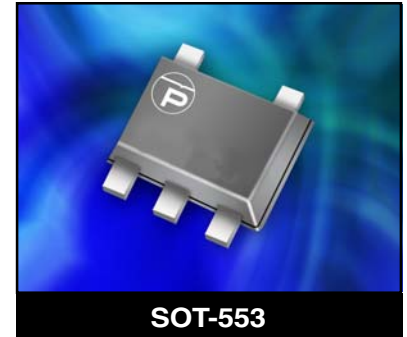

### PIN CONFIGURATION



# MSMF05LC

## DEVICE CHARACTERISTICS

### MAXIMUM RATINGS @ 25°C Unless Otherwise Specified


PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ( $t_p = 8/20\mu s$ ) - See Figure 1	$P_{PP}$	25	Watts
Operating Temperature	$T_L$	-55 to 150	°C
Storage Temperature	$T_{STG}$	-55 to 150	°C
Maximum Forward Voltage @ 10mA	$V_F$	1.0	V

### ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified


PART NUMBER	DEVICE MARKING	RATED STAND-OFF VOLTAGE  $V_{WM}$ VOLTS	MINIMUM BREAKDOWN VOLTAGE  @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)  @ 8/20 $\mu s$ $V_C @ I_{PP}$	MAXIMUM LEAKAGE CURRENT  @ $V_{WM}$ $I_b$ $\mu A$	MAXIMUM CAPACITANCE (See Note 1)  0V @ 1 MHz C pF
MSMF05LC	5L	5.0	6.0	12.0V @ 2.0A	1	9

**Note 1:** Pins 1, 3, 4, 5, or 6 to pin 2.



**FIGURE 1**  
PEAK PULSE POWER VS PULSE TIME

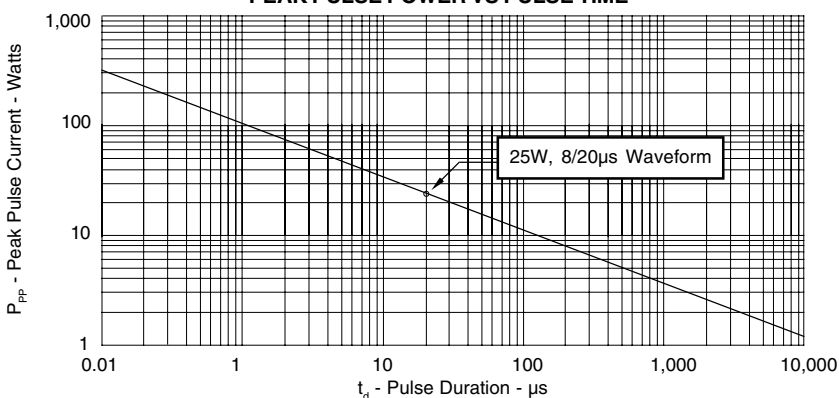

**FIGURE 2**  
PULSE WAVE FORM


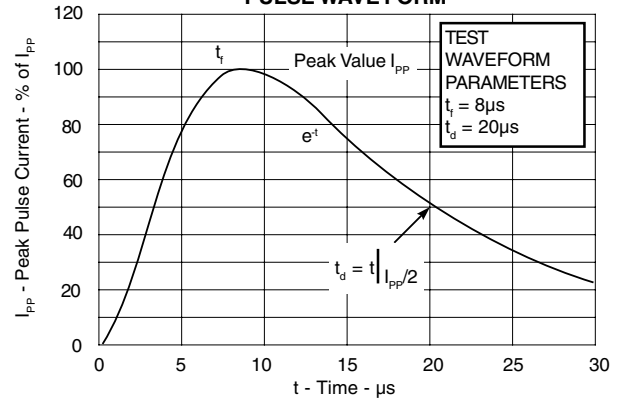


## GRAPHS

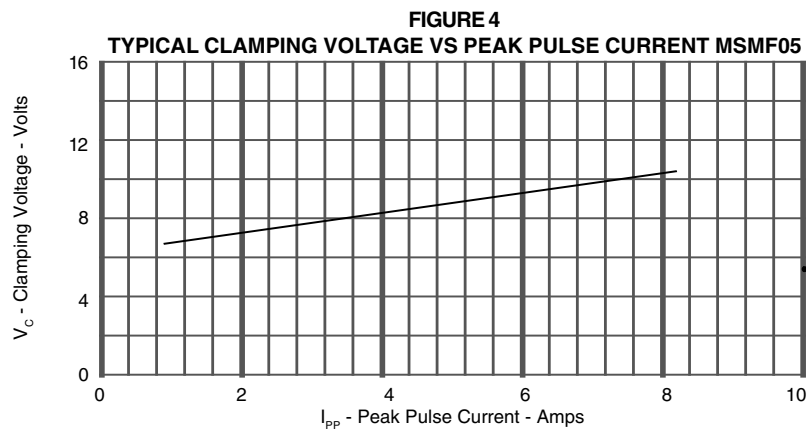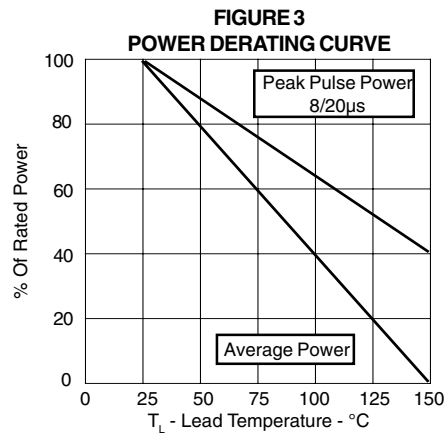


# MSMF05LC

## SOT-553 PACKAGE OUTLINE & DIMENSIONS

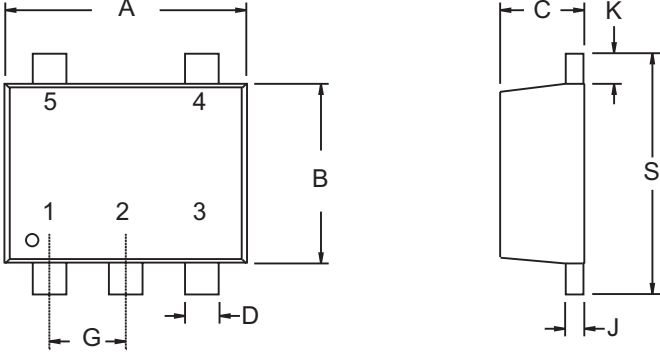
PACKAGE OUTLINE		SOT-553			
					
PACKAGE DIMENSIONS					
DIM	MILLIMETERS		INCHES		
	MIN	MAX	MIN	MAX	
A	1.50	1.70	0.059	0.067	
B	1.10	1.30	0.043	0.051	
C	0.50	0.60	0.020	0.024	
D	0.17	0.27	0.007	0.011	
G	0.50 BSC	-	0.020 BSC	-	
J	0.08	0.16	0.003	0.007	
K	0.10	0.30	0.004	0.012	
S	1.50	1.70	0.059	0.067	

MOUNTING PAD			NOTES																					
<table border="1" style="margin: auto;"> <thead> <tr> <th colspan="3">TYPICAL</th> </tr> <tr> <th>DIM</th> <th>Millimeters</th> <th>Inches</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.30</td> <td>0.012</td> </tr> <tr> <td>2</td> <td>1.02</td> <td>0.040</td> </tr> <tr> <td>3</td> <td>0.51</td> <td>0.020</td> </tr> <tr> <td>4</td> <td>1.40</td> <td>0.055</td> </tr> <tr> <td>5</td> <td>0.51</td> <td>0.020</td> </tr> </tbody> </table>			TYPICAL			DIM	Millimeters	Inches	1	0.30	0.012	2	1.02	0.040	3	0.51	0.020	4	1.40	0.055	5	0.51	0.020	
TYPICAL																								
DIM	Millimeters	Inches																						
1	0.30	0.012																						
2	1.02	0.040																						
3	0.51	0.020																						
4	1.40	0.055																						
5	0.51	0.020																						
			<p><b>NOTES</b></p> <ol style="list-style-type: none"> <li>1. Dimensioning and tolerances per ANSI Y14.5M, 1985.</li> <li>2. Controlling Dimension: Inches</li> <li>3. Pin 3 is the cathode (Unidirectional Only).</li> <li>4. Dimensions are exclusive of mold flash and metal burrs.</li> </ol> <p><b>TAPE &amp; REEL/BULK ORDERING NOMENCLATURE</b></p> <ol style="list-style-type: none"> <li>1. Surface mount product is taped and reeled in accordance with EIA-481.</li> <li>2. Suffix - T7 = 7 Inch Reel - 3,000 pieces per 8mm tape, i.e., <i>MSMF05LC-T7</i>.</li> <li>3. Suffix - T13 = 13 Inch Reel - 10,000 pieces per 8mm tape, i.e., <i>MSMF05LC-T13</i>.</li> <li>4. Suffix - P = Lead-Free, Nickel-Paladium-Gold Plating, i.e., <i>MSMF05LC-P-T7</i>.</li> </ol> <p style="text-align: right;"><b>Outline &amp; Dimensions: Rev 1 - 9/05, 06050</b></p>																					
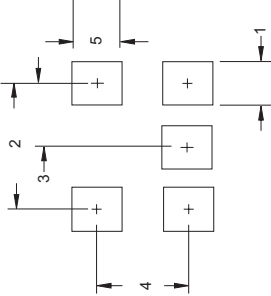
### Tape & Reel Specifications (Dimensions in millimeters)

Reel Dia.	Tape Width	A0	B0	K0	D	E	F	W	P0	P2	P	tmax
178mm (7")	8mm	1.78 ± 0.05	1.78 ± 0.05	0.69 ± 0.05	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

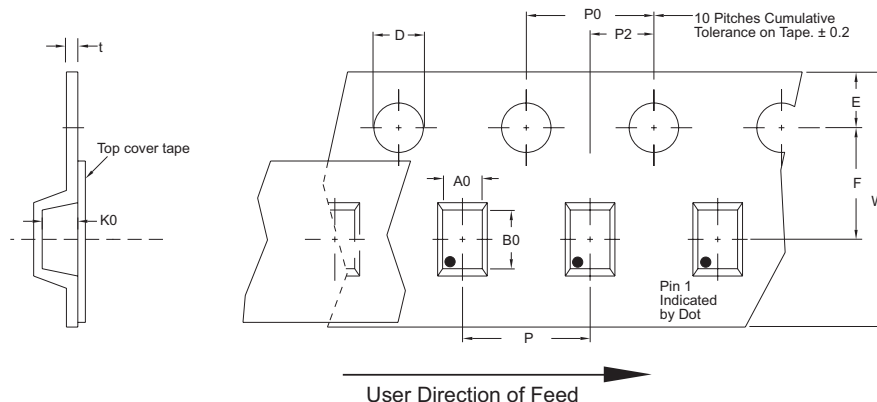

**COPYRIGHT © ProTek Devices 2007**

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

**ProTek Devices**  
 2929 South Fair Lane, Tempe, AZ 85282  
 Tel: 602-431-8101 Fax: 602-431-2288  
 E-Mail: [sales@protekdevices.com](mailto:sales@protekdevices.com)  
 Web Site: [www.protekdevices.com](http://www.protekdevices.com)