


# MICRO ELECTRONICS

MOB32DH  
 MOB32DRH  
 MSB32DH  
 MUB32DH  
 MYB32DH

## DESCRIPTION

This series lamps are low current high efficiency LED, encapsulated in a 3mm diameter epoxy package.

- MGB32DH is a green LED with green diffused lens.
- MOB32DH is an orange LED with orange diffused lens.
- MOB32DRH is a high efficiency red LED with red diffused lens.
- MSB32DH is a red LED with red diffused lens.
- MUB32DH is a GaAlAs red LED with red diffused lens.
- MYB32DH is a yellow LED with yellow diffused lens.

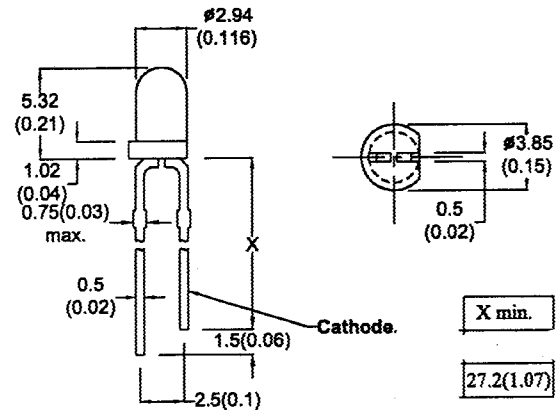

- All dimension in mm(inch)
- No Scale
- Tol. : +/-0.3mm

## ABSOLUTE MAXIMUM RATINGS

Power Dissipation @ Ta=25°C  
 Forward Current, DC (IF)  
 Reverse Voltage  
 Operating & Storage Temperature Range  
 Lead Temperature

	<u>MSB32DH</u>	<u>MYB32DH</u>	<u>MUB32DH</u>
	40mW	60mW	100mW
	15mA	20mA	30mA
	5V	5V	5V
		-55 to +100°C	
		260°C	

## ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MGB	MOB	MOB*	MSB	MUB	MYB	UNIT	CONDITIONS
Forward Voltage	MAX VF	3.0	3.0	3.0	3.0	3.0	3.0	V	IF=20mA
Reverse Breakdown Voltage	MIN BVR	5	5	5	5	5	5	V	IR=100μA
Luminous Intensity	MIN IV	1.5	1.5	1.5	1.2	1**	1	mcd	IF=2mA
	TYP	2.5	2.5	2.5	2	1.8**	2	mcd	IF=2mA
Peak Wavelength	TYP λp	565	630	645	650	660	585	nm	IF=20mA
Spectral Line Half Width	TYP Δλ	35	40	40	100	20	35	nm	IF=20mA

\* MOB32DRH

\*\* IV @ IF=1mA



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.  
 Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5