



NTE30105
LED – Dual Color
5mm Yellow/Yellow Green

Features:

- RoHS Compliant
- White Diffused

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)


Power Dissipation, P_d			
Yellow	90mW	
Yellow Green	84mW	
Continuous Forward Current, I_F	25mA	
Peak Forward Current (1/10 Duty Ratio, 0.1ms Pulse Width), I_{FM}	50mA	
Reverse Voltage, V_R	3V	
LED Junction Temperature, T_j	+100°C	
Operating Temperature Range, T_{opr}	-25°C to +80°C	
Storage Temperature Range, T_{stg}	-40°C to +100°C	
DIP Soldering Temperature (During Soldering, 3mm from body, 5sec max), T_L	+260°C	

Electro–Optical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
View Angle of Half Power	$2\theta_{1/2}$	$IF = 20\text{mA}$	–	40	–	deg
Forward Voltage Yellow	VF	$IF = 20\text{mA}$	–	2.10	2.80	V
Yellow–Green			–	2.15	2.80	V
Luminous Intensity (Note 1) Yellow	IV	$IF = 20\text{mA}$	25	40	–	mcd
Yellow–Green			35	60	–	mcd
Peak Emission Wavelength Yellow	λ_p	$IF = 20\text{mA}$	–	589	–	nm
Yellow–Green			–	570	–	nm
Dominate Wave Length (Note 2) Yellow	$\lambda_d(\text{HUE})$	$IF = 20\text{mA}$	–	585	–	nm
Yellow–Green			–	567	–	nm

Note 1. Luminous intensity is measured with an Exeltron 2001, Tolerance = 30%.

Note 2. The dominate wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the device.

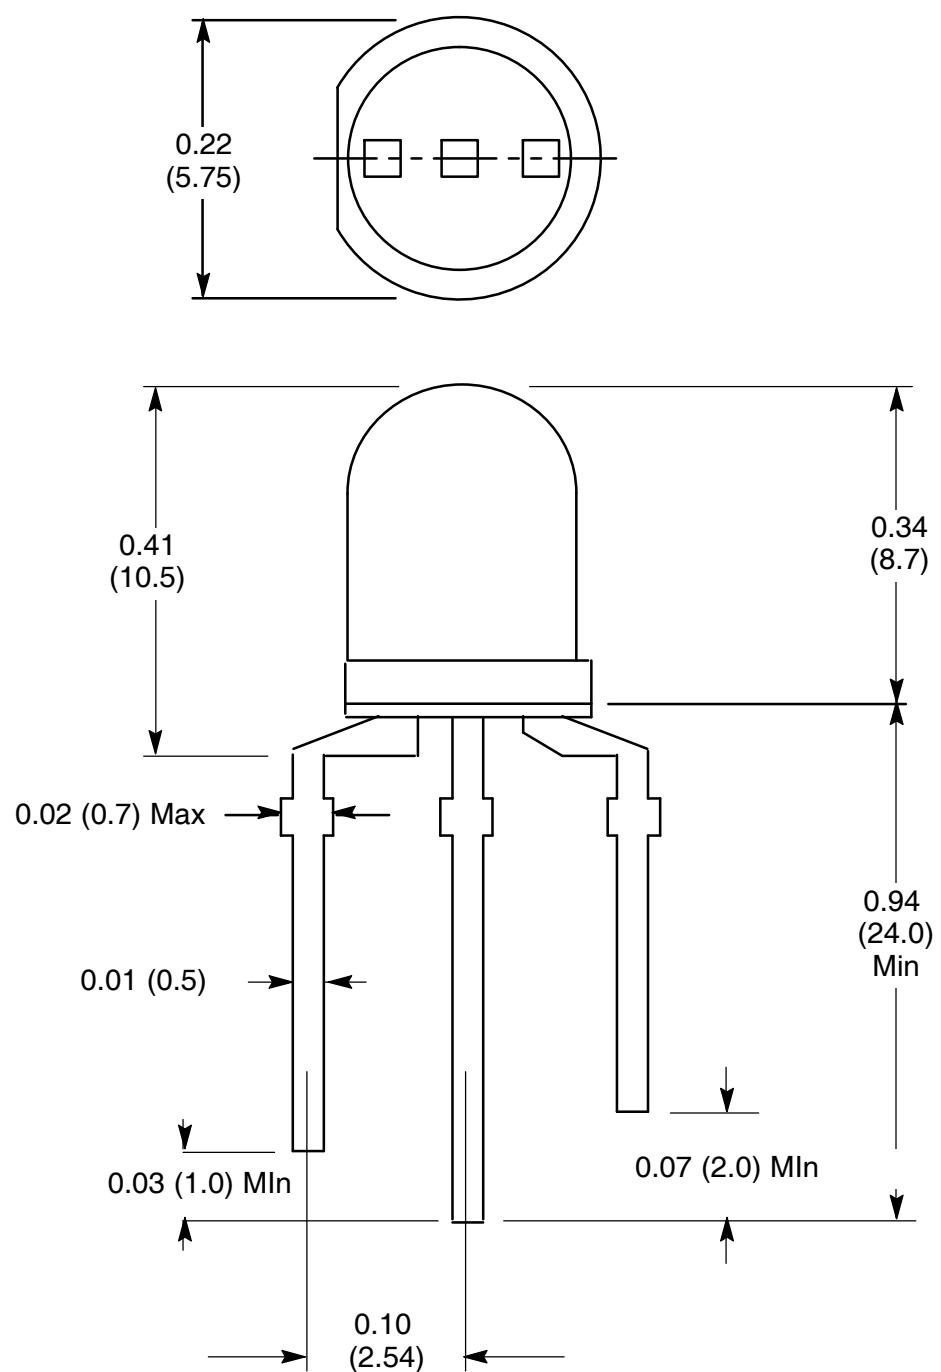

1. Yellow +
2. Common Lead -
3. Green +