

File Number 1448

RCA9228A, RCA9228B, RCA9228C, RCA9228D  
RCA9229A, RCA9229B, RCA9229C, RCA9229D

## 50-A Complementary High Current, Medium Voltage N-P-N and P-N-P Silicon Darlington Power Transistors


**Features:**

- 300 W at 25°C case temperature
- 50-A rated collector current
- Hard glass passivation
- Wire-bonded construction

**Applications:**

- General purpose
- Low-speed switching
- DC motor control

**TERMINAL DESIGNATIONS**



JEDEC TO-204AE

(141 mil diameter pin isolation)

The RCA-9228 Series and the RCA-9229 Series\* complementary n-p-n and p-n-p silicon Darlington transistors are designed for general-purpose amplifier and low-speed switching applications. The high gain of these devices makes it possible for them to be driven directly from integrated circuits.

These devices are supplied in the JEDEC TO-204AE hermetic steel package.

\*The RCA9228 and RCA9229 Series were formerly RCA developmental numbers TA9228 and TA9229, respectively.

**MAXIMUM RATINGS, Absolute-Maximum Values:**

	RCA9228A RCA9229A*	RCA9228B RCA9229B*	RCA9228C RCA9229C*	RCA9228D RCA9229D*	
V <sub>CSO</sub> .....	60	80	100	120	V
V <sub>CES(SUS)</sub> .....	60	80	100	120	V
V <sub>ESB</sub> .....	5				V
I <sub>C</sub> .....	50				A
I <sub>B</sub> .....	1				A
P <sub>T</sub>					
T <sub>c</sub> ≤ 25°C .....	300				W
T <sub>c</sub> > 25°C .....	Derate linearly				W/°C
T <sub>stg</sub> , T <sub>J</sub> .....	-65 to +150				°C
T <sub>L</sub>					
At distances > 1/8 in. (3.17 mm) from case for 10 s max. ....	235				°C

\* For p-n-p devices, voltage and current values are negative.

3875081 G E SOLID STATE

01E 17324

D T-33-33

Darlington Power Transistors

**RCA9228A, RCA9228B, RCA9228C, RCA9228D  
RCA9229A, RCA9229B, RCA9229C, RCA9229D**

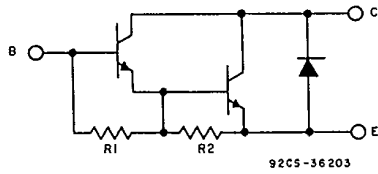


Fig. 1 - Schematic diagram for RCA9228 Series.

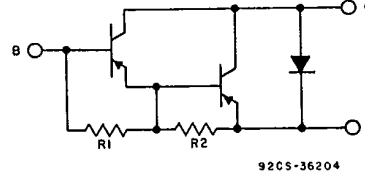


Fig. 2 - Schematic diagram for RCA9229 Series.

**ELECTRICAL CHARACTERISTICS, Case Temperature (T<sub>c</sub>) = 25°C Unless Otherwise Specified**


CHARACTERISTIC	TEST CONDITIONS				LIMITS								UNITS
	VOLTAGE V dc		CURRENT A dc		RCA9228A RCA9229A*		RCA9228B RCA9229B*		RCA9228C RCA9229C*		RCA9228D RCA9229D*		
	V <sub>CE</sub>	V <sub>BE</sub>	I <sub>C</sub>	I <sub>B</sub>	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
I <sub>CEO</sub>	50 70 90 110				—	0.5	—	—	—	—	—	—	mA
I <sub>EB0</sub>		-5			—	5	—	5	—	5	—	5	mA
V <sub>CEO</sub>	(a)		0.1 <sup>(b)</sup>		60	—	80	—	100	—	120	—	V
h <sub>FE</sub>	3 3		25 50		2000 400	—	2000 400	—	2000 400	—	2000 400	—	
V <sub>BE(sat)</sub>			25 50	0.1 0.2	— —	2.5 3.5	— —	2.5 3.5	— —	2.5 3.5	— —	2.5 3.5	V
V <sub>CE(sat)</sub>			25 50	0.1 0.2	— —	2 3	— —	2 3	— —	2 3	— —	2 3	V
I <sub>sb</sub> t = 0.5 sec.	30				10	—	10	—	10	—	10	—	A
R <sub>θJC</sub>					—	0.416	—	0.416	—	0.416	—	0.416	°C/W
Typical Values C <sub>ob</sub> V <sub>CB</sub> = 10 V RCA9228 Series RCA9229 Series h <sub>ie</sub> 1 MHz					Typ. Typ. Typ.	300 600 5	Typ. Typ. Typ.	300 600 5	Typ. Typ. Typ.	300 600 5	Typ. Typ. Typ.	300 600 5	pF

(a) CAUTION: Sustaining voltage V<sub>ceo(sus)</sub> MUST NOT be measured on a curve tracer.

(b) Pulsed: Pulse duration = 300 μs, duty factor < 2%.

\* For p-n-p devices, voltage and current values are negative.

RCA9228A, RCA9228B, RCA9228C, RCA9228D  
 RCA9229A, RCA9229B, RCA9229C, RCA9229D

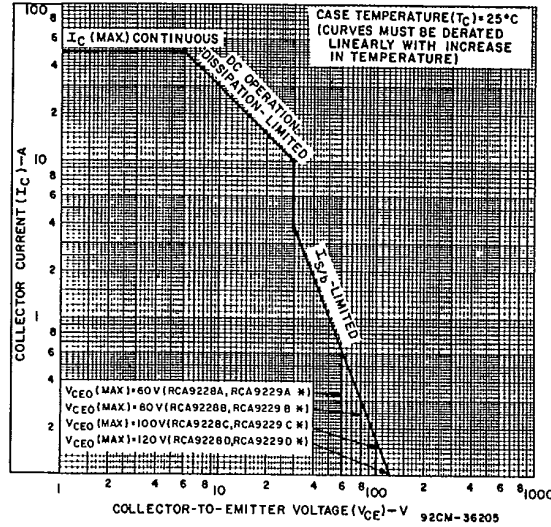

\*FOR p-n-p DEVICES, VOLTAGE AND CURRENT VALUES ARE NEGATIVE

Fig. 3 - Maximum operating areas for all types.

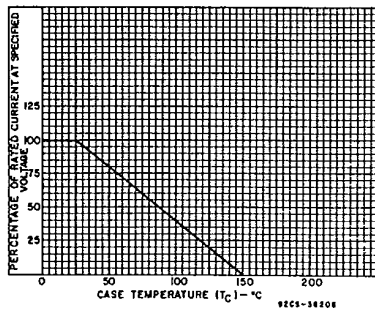


Fig. 4 - Current derating curve for all types.

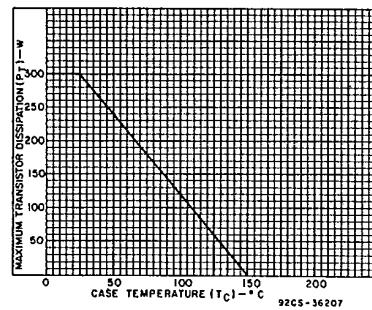


Fig. 5 - Power derating curve for all types.

Darlington Power Transistors

RCA9228A, RCA9228B, RCA9228C, RCA9228D  
RCA9229A, RCA9229B, RCA9229C, RCA9229D

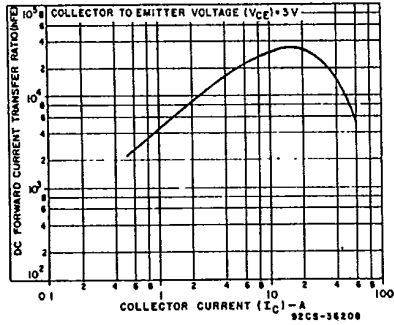


Fig. 6 - Typical dc beta characteristics for RCA9228 Series.

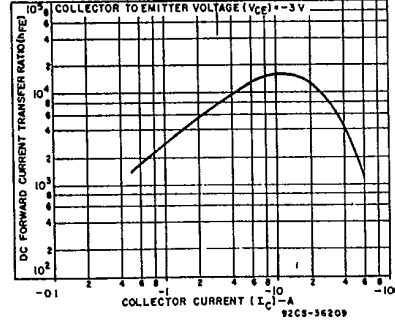


Fig. 7 - Typical dc beta characteristics for RCA9229 Series.

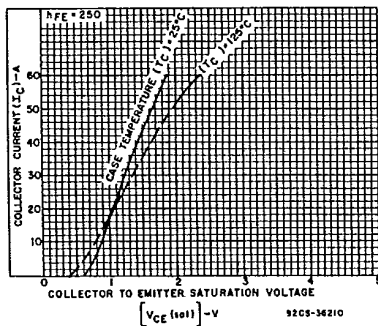


Fig. 8 - Typical saturation characteristics for RCA9228 Series.

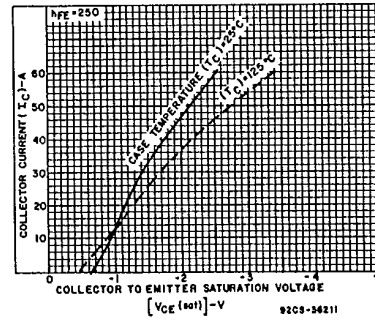


Fig. 9 - Typical saturation characteristics for RCA9229 Series.

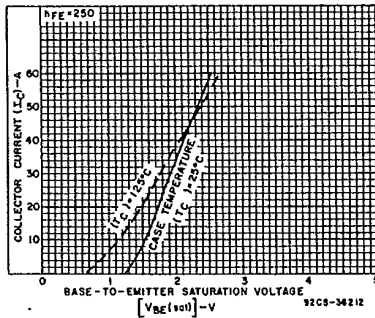


Fig. 10 - Typical saturation characteristics for RCA9228 Series.

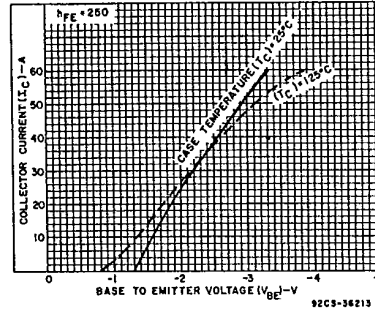


Fig. 11 - Typical saturation characteristics for RCA9229 Series.