

Features

Regulated Converters

- 2.2W DIP Package
- 1kVDC, 2kVDC & 3kVDC Isolation Options
- Regulated Output
- Wide Input Range 2 : 1 and 4 : 1
- UL94V-0 Package Material
- Continuous Short Circuit Protection
- Cost Effective
- 100% Burned In
- Efficiency to 84%

Selection Guide

| Part Number | Input Voltage (VDC) | Output Voltage (VDC) | Max Cap. Load (μF) | Output Current (mA) |
|---------------------|-----------------------------------|----------------------|--------------------|---------------------|
| REC2.2-xx3.3SRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 3.3 | 1000 | 600 |
| REC2.2-xx05SRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 5 | 470 | 440 |
| REC2.2-xx09SRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 9 | 220 | 244 |
| REC2.2-xx12SRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 12 | 120 | 183 |
| REC2.2-xx15SRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | 15 | 100 | 146 |
| REC2.2-xx3.3DRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±3.3 | ±470 | ±300 |
| REC2.2-xx05DRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±5 | ±220 | ±220 |
| REC2.2-xx09DRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±9 | ±100 | ±122 |
| REC2.2-xx12DRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±12 | ±68 | ±91 |
| REC2.2-xx15DRW/H* | 4.5 - 9, 9 - 18, 18 - 36, 36 - 72 | ±15 | ±47 | ±73 |
| REC2.2-xx3.3SRWZ/H* | 9 - 36, 18 - 72 | 3.3 | 1000 | 600 |
| REC2.2-xx05SRWZ/H* | 9 - 36, 18 - 72 | 5 | 470 | 440 |
| REC2.2-xx09SRWZ/H* | 9 - 36, 18 - 72 | 9 | 220 | 244 |
| REC2.2-xx12SRWZ/H* | 9 - 36, 18 - 72 | 12 | 120 | 183 |
| REC2.2-xx15SRWZ/H* | 9 - 36, 18 - 72 | 15 | 100 | 146 |
| REC2.2-xx3.3DRWZ/H* | 9 - 36, 18 - 72 | ±3.3 | ±470 | ±300 |
| REC2.2-xx05DRWZ/H* | 9 - 36, 18 - 72 | ±5 | ±220 | ±220 |
| REC2.2-xx09DRWZ/H* | 9 - 36, 18 - 72 | ±9 | ±100 | ±122 |
| REC2.2-xx12DRWZ/H* | 9 - 36, 18 - 72 | ±12 | ±68 | ±91 |
| REC2.2-xx15DRWZ/H* | 9 - 36, 18 - 72 | ±15 | ±47 | ±73 |

2:1 Input

(REC2.2-S/DRW/H*)
 xx = 4.5-9Vin = 05
 xx = 9-18Vin = 12
 xx = 18-36Vin = 24
 xx = 36-72Vin = 48

4:1 Input

(REC2.2-S/DRWZ/H*)
 xx = 9-36Vin = 24
 xx = 18-72Vin = 48

- * use suffix **/H1** for 1kVDC Isolation, **/H2** for 2kVDC Isolation or **/H3** for 3kVDC Isolation.
- * add suffix **/A**, **/B** or **/C** for Pinning, see next page
- * add suffix **/M** for metal case
- * add suffix **/SMD** for SMD package
 e.g. REC2.2-2412SRW/H1/AM = / Pinout "A" with metal case

Notes:

If the options **/M** for metal case and **/SMD** for SMD pinout are combined the maximum allowed isolation voltage is 2kVDC because of the shorter distances between the pins and the metal-case so the only available SMD-option in metal-case is **/H2**. DIP-24 through-hole case and SMD-plastic case are not affected and offer the full isolation barriers of 2kVDC for **/H2** option and 3kVDC for **/H3**.
 The **/H2** and **/H3** Version is not available in B Pinning.

ECONOLINE

DC/DC-Converter


REC2.2-S_DRW(Z) /H* Series

2.2 Watt

DIP24 & SMD

Single & Dual

Output



EN-60601-1 Certified
(Suffix H3)


UL-60950-1 Certified



Specifications (Core Operating Area)




| | | | |
|---|---|---------------------------|------------------------------|
| Input Voltage Range | 2:1 & 4:1 | | |
| Output Voltage Accuracy | ±1% max. | | |
| Line Regulation (HL-LL) | 2:1 Input types | ±0.2% max. | |
| | 4:1 Input types | ±0.2% max. | |
| Load Regulation (for output load current change from 20% to 100%) | ±0.5% max. | | |
| Output Ripple and Noise (0,1µF capacitor on output, 20MHz BW) | 50mVp-p max. | | |
| Switching Frequency at Full Load and nominal Input Voltage | 2:1 Input types | 90kHz min. / 150kHz max. | |
| | 4:1 Input types | 120kHz min. / 180kHz max. | |
| Input Filter | Pi Network | | |
| Efficiency at Full Load | 84% max. | | |
| No Load Power Consumption | 200mW typ. | | |
| Isolation Voltage | H1 Types | (tested for 1 second) | 1000VDC min. |
| Rated Working Voltage | | | see Application Notes |
| Isolation Voltage | H2 Types | (tested for 1 second) | 2000VDC min. |
| Rated Working Voltage | | | see Application Notes |
| Isolation Voltage | H3 Types | (tested for 1 second) | 3000VDC min. |
| Rated Working Voltage | | | see Application Notes |
| Isolation Capacitance | 2:1 Input types | 20pF min. / 60pF max. | |
| | 4:1 Input types | 40pF min. / 80pF max. | |
| Isolation Resistance | 1 GΩ min. | | |
| Short Circuit Protection | Continuous | | |
| Operating Temperature Range (free air convection) | -40°C to +85°C (see Graph) | | |
| Storage Temperature Range | -55°C to +125°C | | |
| Relative Humidity | 95% RH | | |
| Case Material | Non-Conductive Plastic | | |
| Thermal Impedance | Natural convection | 20°C/W for metal case | |
| Package Weight | 12g | | |
| MTBF (+25°C) | } Detailed Information see Application Notes chapter "MTBF" | using MIL-HDBK 217F | 1102 x 10 ³ hours |
| | | using MIL-HDBK 217F | 186 x 10 ³ hours |

Derating-Graph (Ambient Temperature)

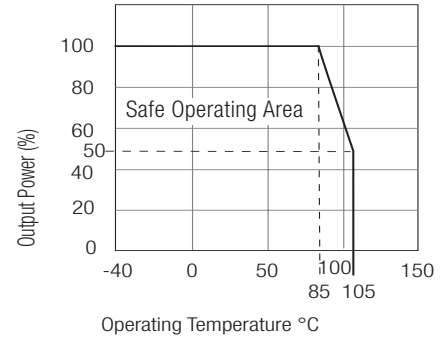


Package Style and Pinning (mm) DIP 24 , Wide Input 2:1 & 4:1

Package A



Recommended Footprint Details



Pin Connections




| Pin # | Single | Dual |
|-------|--------|-------|
| 2 | -Vin | -Vin |
| 3 | -Vin | -Vin |
| 9 | NC | Com |
| 11 | NC | -Vout |
| 14 | +Vout | +Vout |
| 16 | -Vout | Com |
| 22 | +Vin | +Vin |
| 23 | +Vin | +Vin |

NC = No Connection
XX.X ± 0.5 mm
XX.XX ± 0.25 mm


Package Style and Pinning (mm) DIP 24 , Wide Input 2:1 & 4:1

Package B

/H1 Only



Recommended Footprint Details






Pin Connections


| Pin # | Single | Dual |
|-------|--------|-------|
| 1 | +Vin | +Vin |
| 2 | No Pin | -Vout |
| 3 | No Pin | Com |
| 10 | -Vout | Com |
| 11 | +Vout | +Vout |
| 12 | -Vin | -Vin |
| 13 | -Vin | -Vin |
| 14 | +Vout | +Vout |
| 15 | -Vout | Com |
| 22 | No Pin | Com |
| 23 | No Pin | -Vout |
| 24 | +Vin | +Vin |

NC = No Connection
XX.X ± 0.5 mm
XX.XX ± 0.25 mm

Package C



Recommended Footprint Details






Pin Connections


| Pin # | Single | Dual |
|-------|--------|-------|
| 1 | +Vin | +Vin |
| 2 | +Vin | +Vin |
| 10 | NC | Com |
| 11 | NC | Com |
| 12 | -Vout | NC |
| 13 | +Vout | -Vout |
| 15 | NC | +Vout |
| 23 | -Vin | -Vin |
| 24 | -Vin | -Vin |

NC = No Connection
XX.X ± 0.5 mm
XX.XX ± 0.25 mm

Mechanical drawings of DIP24 SMD case



Recommended Footprint Details

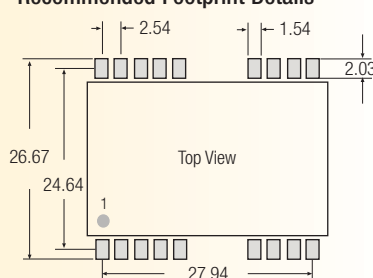

All unused pins are NC (No Connection). SMD pin connections follow standard package pinning. See Notes for restrictions on /H3 SMD versions.

Tol.: ± 0.35 mm

length of plastic case is 31,8mm, length of metal case 32.0mm