

## Axial Lead Diode

## Avalanche Diode

### SKa 3

### Features

- Avalanche type reverse characteristic
- Transient voltage proof within specified limits
- Taped for automatic insertion
- Available with formed leads on request
- Plastic material used carries Underwriter Laboratories flammability classification 94V-0







### Typical Applications


- DC supply for magnetes or solenoids (brakes, valves etc.)
- Series connections for high voltage applications (dust precipitators)



$V_{(BR)min}$	$I_{FRMS} = 6,7 \text{ A}$ (maximum value for continuous operation)	$C_{max}$	$R_{min}$
V	$I_{FAV} = 3 \text{ A}$ (sin. 180; $T_r = 90 \text{ }^\circ\text{C}$ )	$\mu\text{F}$	$\Omega$
1300	SKa 3/13	1600	2
1700	SKa 3/17	800	4

Symbol	Conditions	Values	Units
$I_{FAV}$	$T_r = 85 \text{ }^\circ\text{C}$ ; $L = 10 \text{ mm}$ ; sin. 180	3,3	A
$I_{FAV}$	$T_a = 45 \text{ }^\circ\text{C}$ ; PCB 50 x 50 mm	1,8	A
$I_{FSM}$	$T_{vj} = 25 \text{ }^\circ\text{C}$ ; 10 ms	180	A
	$T_{vj} = 150 \text{ }^\circ\text{C}$ ; 10 ms	150	A
$i^2t$	$T_{vj} = 25 \text{ }^\circ\text{C}$ ; 8,3 ... 10 ms	162	$\text{A}^2\text{s}$
	$T_{vj} = 150 \text{ }^\circ\text{C}$ ; 8,3 ... 10 ms	112,5	$\text{A}^2\text{s}$
$V_F$	$T_{vj} = 25 \text{ }^\circ\text{C}$ ; $I_F = 10 \text{ A}$	max. 1,2	V
$V_{(TO)}$	$T_{vj} = 150 \text{ }^\circ\text{C}$	max. 0,85	V
$r_T$	$T_{vj} = 150 \text{ }^\circ\text{C}$	max. 30	$\text{m}\Omega$
$I_{RD}$	$T_{vj} = 150 \text{ }^\circ\text{C}$ ; $V_{RD} = V_{(BR)min}$	max. 600	$\mu\text{A}$
$P_{RSM}$	$T_{vj} = 150 \text{ }^\circ\text{C}$ ; $t_p = 10 \mu\text{s}$	1,8	kW
$R_{th(j-r)}$	$L = 10 \text{ mm}$	18	K/W
$R_{th(j-a)}$	PCB 50 x 50 mm	60	K/W
$T_{vj}$		- 40 ... + 150	$^\circ\text{C}$
$T_{stg}$		- 40 ... + 150	$^\circ\text{C}$
$T_{sold}$	max. 10 s; $L > 9 \text{ mm}$	250	$^\circ\text{C}$
$V_{isol}$		-	V~
a		$5 * 9,81$	$\text{m/s}^2$
m	approx.	1	g
Case	1500 diodes per reel	E 34	

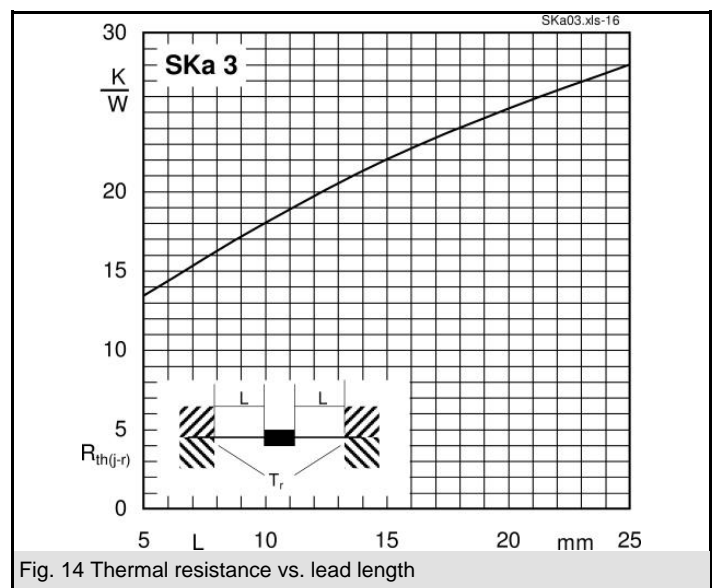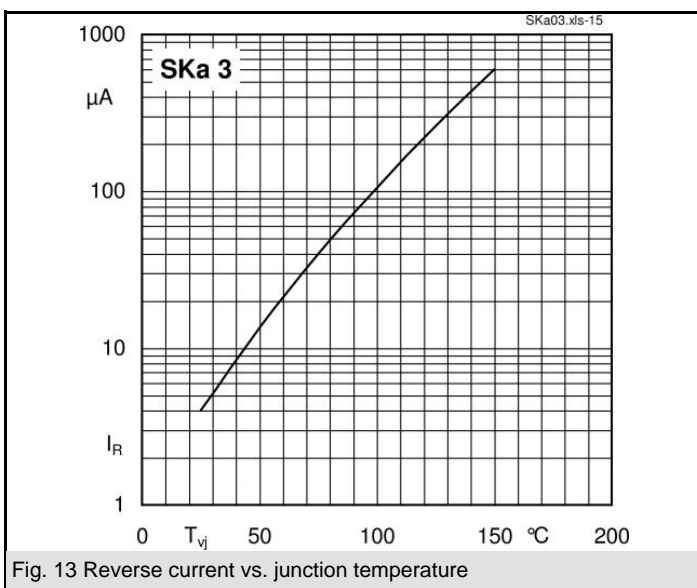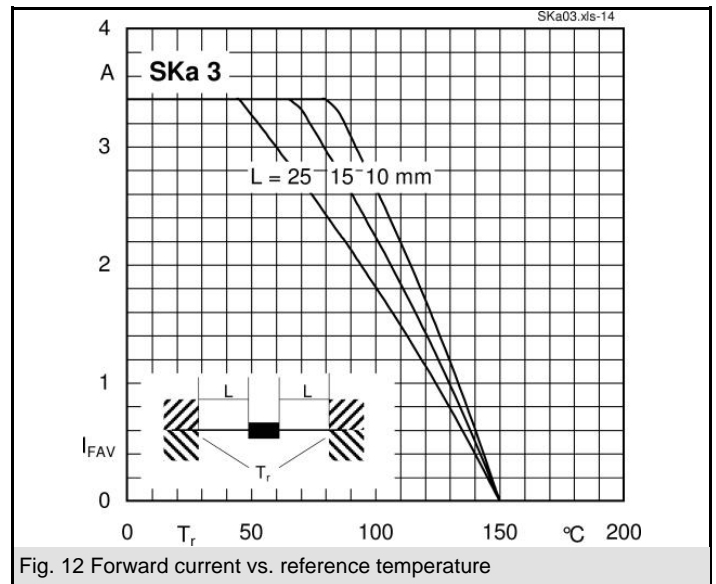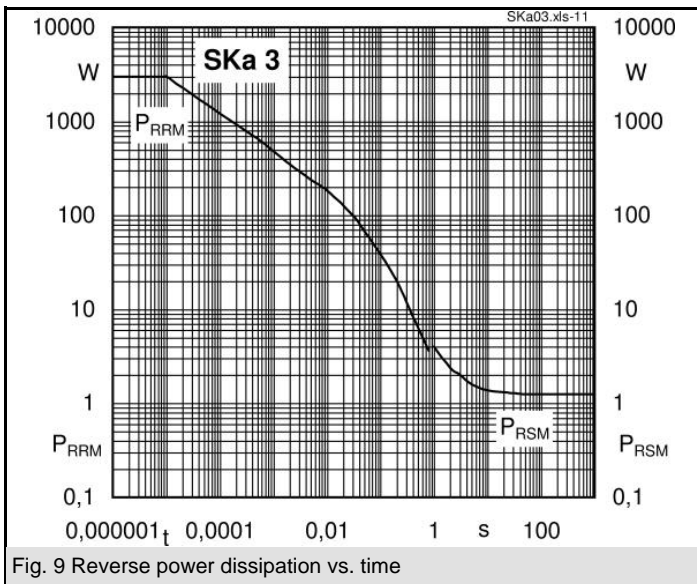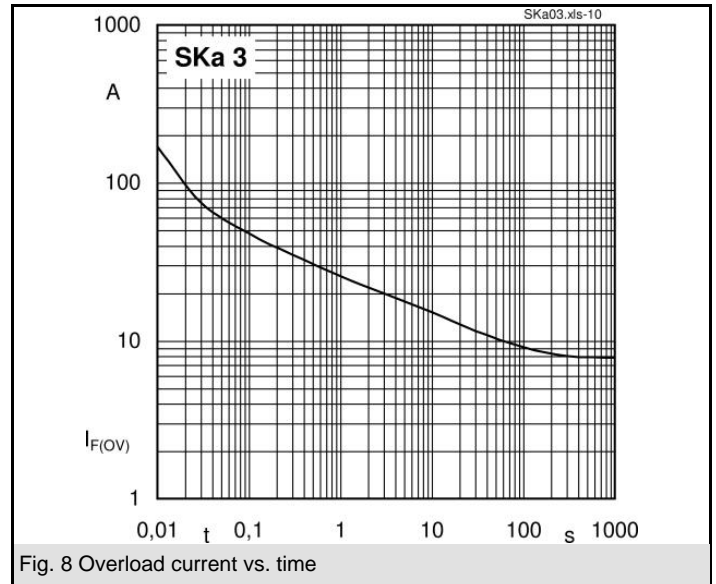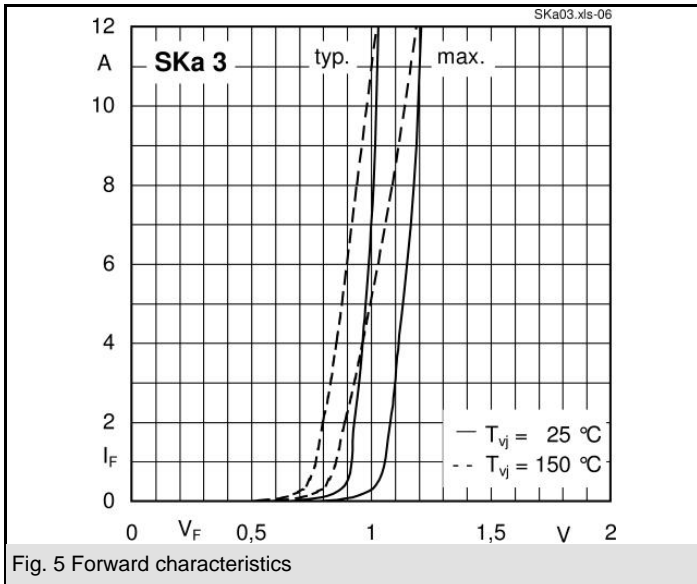

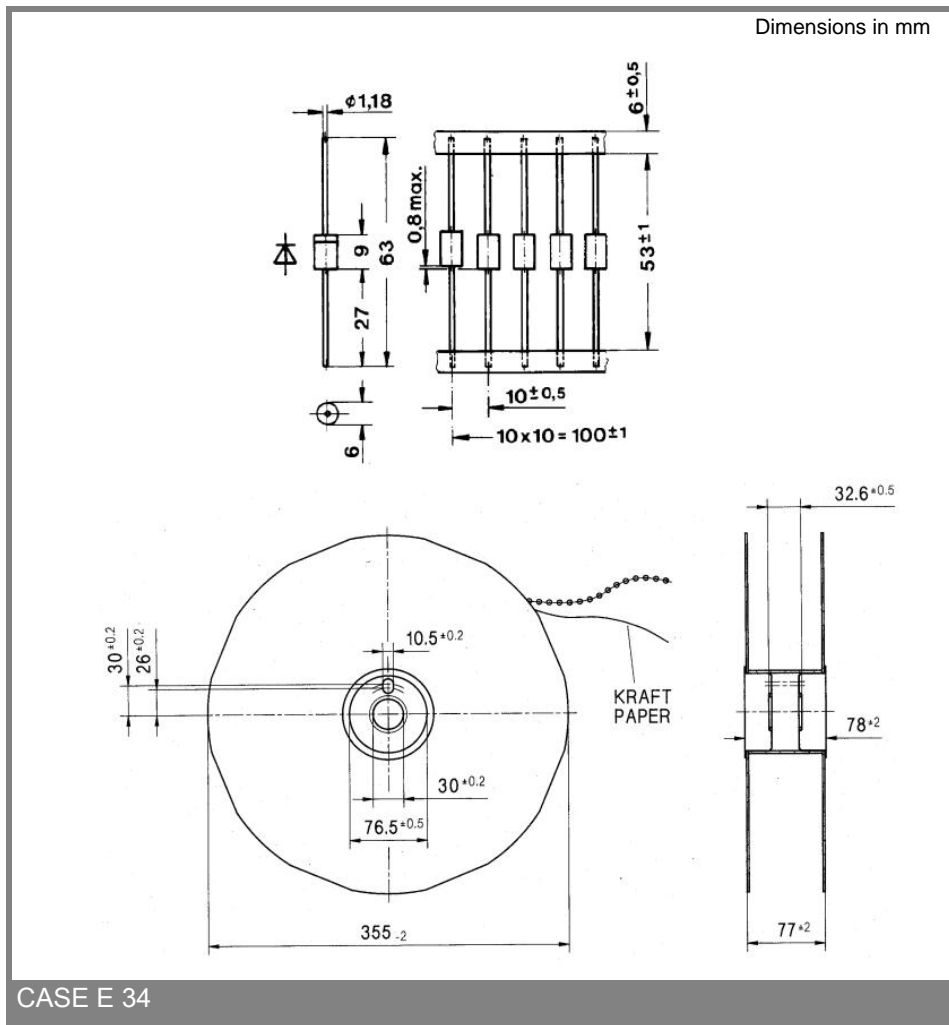

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.