

DATA SHEET

SMWO2/O3/O5

SMFO2/O3/O5

Stand-up miniature power resistors

Product specification
Supersedes data of 7th August 2000
File under BCcomponents, BC08

2001 Mar 15

Stand-up miniature power resistors

SMW02/03/05
SMF02/03/05

FEATURES

- High power dissipation in small volume
- High pulse load handling capabilities
- 2e pitch mounting
- Designed in stand-up configuration for stand-up mounting.

APPLICATIONS

- Ballast switching
- Power supplies
- Shunts.

DESCRIPTION

SMW: The resistor element is a resistive wire which is wound in a single layer on a ceramic rod. Metal caps are pressed over the ends of the rod. The ends of the resistance wire and the leads are connected to the caps by welding.

SMF: The resistor element is a metal film resistor consisting of a metal layer deposited over a high grade ceramic rod. The resistive film is adjusted to final value by means of a helical groove. The leads are connected to the caps by welding.

SMW/SMF: Tinned copper-clad iron leads with poor heat conductivity are employed permitting the use of relatively short leads to obtain stable mounting without overheating the solder joint.

The resistor body and lead ends are housed within a rectangular ceramic case which is non-flammable, will not melt even at high overloads and is resistant to most commonly used cleaning solvents, in accordance with "MIL-STD-202E, method 215" and "IEC 60068-2-45".

QUICK REFERENCE DATA

DESCRIPTION	VALUE					
	SMW02	SMF02	SMW03	SMF03	SMW05	SMF05
Resistance range; note 1	0.1 to 200 Ω	220 Ω to 47 k Ω	0.1 to 560 Ω	620 Ω to 47 k Ω	0.1 to 560 Ω	620 Ω to 47 k Ω
Resistance tolerance	$\pm 5\%$; E24 series					
Maximum permissible body temperature	300 °C					
Rated dissipation at $T_{amb} = 70$ °C	2 W		3 W		5 W	
Climatic category (IEC 60068)	40/200/56					
Basic specification	IEC 60115-1					
Stability after:						
load, 1000 hours	$\Delta R/R$ max.: $\pm 5\% + 0.1 \Omega$					
climatic tests	$\Delta R/R$ max.: $\pm 3\% + 0.1 \Omega$					
short time overload	$\Delta R/R$ max.: $\pm 2\% + 0.1 \Omega$					
Insulation voltage	>2000 V					

Note

1. Higher values are available on request.

Stand-up miniature power resistors

SMW02/03/05
SMF02/03/05

ORDERING INFORMATION

Table 1 Ordering code indicating resistor type and packaging

TYPE	ORDERING CODE 2306 34.
	LOOSE IN BOX
	500 units
SMW02	0 03...
SMF02	5 03...
SMW03	1 03...
SMF03	6 03...
SMW05	2 03...
SMF05	7 03...

Ordering code (12NC)

- The resistors have a 12-digit ordering code starting with 2306 34
- The subsequent 3 digits indicate the resistor type and packaging; see Table 1.
- The remaining 3 digits indicate the resistance value:
 - The first 2 digits indicate the resistance value.
 - The last digit indicates the resistance decade in accordance with Table 2.

Table 2 Last digit of 12NC

RESISTANCE DECADE	LAST DIGIT
0.1 to 0.91 Ω	7
1 to 9.1 Ω	8
10 to 91 Ω	9
100 to 910 Ω	1
1 to 9.1 k Ω	2
10 to 47 k Ω	3

ORDERING EXAMPLE

The ordering code of a SMW02 resistor, value 47 Ω , supplied loose in box of 500 units is: 2306 340 03479.

Stand-up miniature power resistors

SMW02/03/05
SMF02/03/05

FUNCTIONAL DESCRIPTION

Product characterization

Standard values of nominal resistance are taken from the E24 series for resistors with a tolerance of $\pm 5\%$. The values of the E24 series are in accordance with "IEC publication 60063".

Limiting values


TYPE	LIMITING VOLTAGE ⁽¹⁾ (V)	LIMITING POWER (W)
SMW02	$V = \sqrt{P_n \times R}$	2
SMF02	350	
SMW03	$V = \sqrt{P_n \times R}$	3
SMF03	350	
SMW05	$V = \sqrt{P_n \times R}$	5
SMF05	600	

Note

- The maximum voltage that may be continuously applied to the resistor element, see "IEC publication 60266".

DERATING

The power that the resistor can dissipate depends on the operating temperature; see Fig.1.

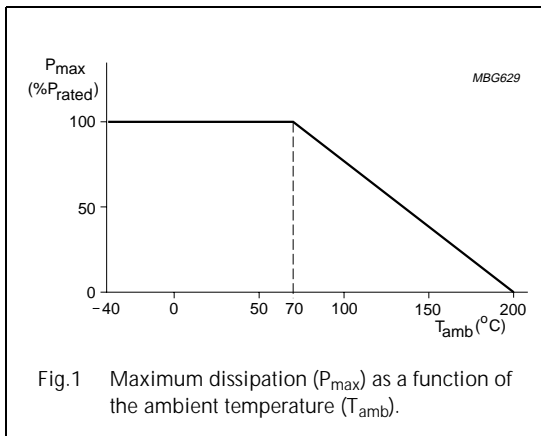

The maximum permissible hot-spot temperature is 300 °C, and the minimum breakdown voltage of the encapsulation is 2000 V.


PULSE LOADING CAPABILITY

Detailed pulse loading information is available on request.

Application information

MOUNTING

The resistors must be mounted in such a way that no stress is exerted on the leads and that thermal expansion is possible over the temperature range. **Ensure that the temperature rise of the resistor body by conducted or convected heat, does not affect nearby components or materials.** The temperature rise at the soldering point of the leads must not reach the melting point of the solder. The temperature rise at the soldering point as a function of dissipated power is shown in Fig.2.

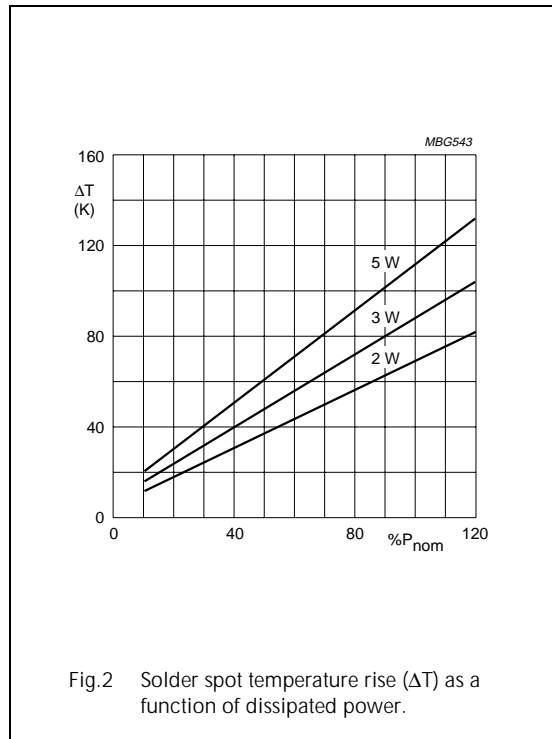

Stand-up miniature power resistors

SMW02/03/05 SMF02/03/05

MECHANICAL DATA

Mass per 100 units

TYPE	MASS (g)
SMW02	370
SMF02	
SMW03	530
SMF03	
SMW05	640
SMF05	

Marking

The resistor is marked with the resistor type designation, the production week, nominal resistance value, the tolerance on the resistance and the rated dissipation at $T_{amb} = 70\text{ }^{\circ}\text{C}$.

For values up to $910\ \Omega$ the R is used as a decimal point. For values of $1\ \text{k}\Omega$ or greater the letter K is used as the decimal point for the $\text{k}\Omega$ indication.

Outlines

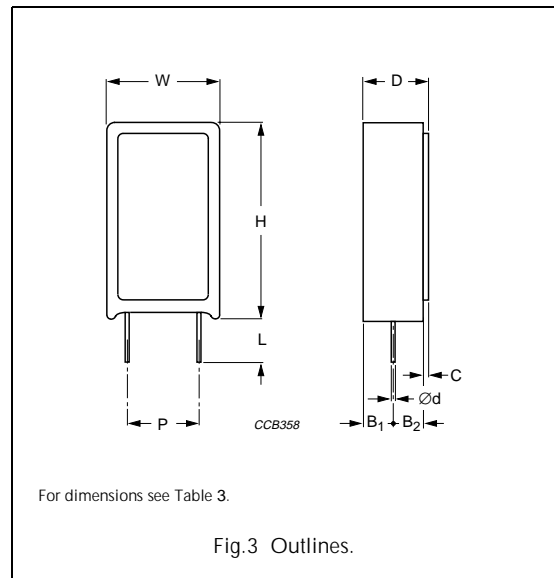


Table 3 Resistor type and relevant physical dimensions; see Fig.3

TYPE	W (mm)	D (mm)	C (mm)	H (mm)	$\varnothing B_1 - B_2 \varnothing$ (mm)	L (mm)	P (mm)	$\varnothing d$ (mm)
SMW02	11 ± 1	7 ± 1	$0/+1.0$	20.5 ± 1.5	$+0.9/-0.3$	4.5 ± 1.5	5 ± 1	0.8 ± 0.03
SMF02								
SMW03	12 ± 1	8 ± 1	$0/+1.0$	25.0 ± 1.5	$+1.4/-0.3$			
SMF03								
SMW05	13 ± 1	9 ± 1	$0/+1.0$	25.5 ± 1.5	$+2.3/-0.3$			
SMF05								

Stand-up miniature power resistors

SMW02/03/05
SMF02/03/05

TESTS AND REQUIREMENTS

Essentially all tests are carried out in accordance with the schedule of "IEC publications 60115-1 and 60115-4", category 40/200/56 (rated temperature range $-40\text{ }^{\circ}\text{C}$ to $+200\text{ }^{\circ}\text{C}$; damp heat, long term, 56 days). The testing also covers the requirements specified by EIA and EIAJ.

The tests are carried out in accordance with IEC publication 60068, "Recommended basic climatic and mechanical robustness testing procedure for electronic components" and under standard atmospheric conditions according to "IEC 60068-1", subclause 5.3.

In Table 4 the tests and requirements are listed with reference to the relevant clauses of

"IEC publications 60115-1, 60115-4 and 68"; a short description of the test procedure is also given. In some instances deviations from the IEC recommendations were necessary for our method of specifying.

All soldering tests are performed with mildly activated flux.

Table 4 Test procedures and requirements

IEC 60115-1 CLAUSE	IEC 60068 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
Tests in accordance with the schedule of IEC publication 60115-1				
4.15		robustness of resistor body	load $200 \pm 10\text{ N}$	no visible damage $\Delta R/R$ max.: $\pm 0.5\% + 0.05\ \Omega$
4.16	U Ua	robustness of terminations: tensile all samples	load 10 N ; 10 s	no visible damage $\Delta R/R$ max.: $\pm 0.5\% + 0.05\ \Omega$
4.17	Ta	solderability	2 s ; $235\text{ }^{\circ}\text{C}$	good tinning; no damage
4.18	Tb	resistance to soldering heat	thermal shock: 3 s ; $350\text{ }^{\circ}\text{C}$; 2.5 mm from body	$\Delta R/R$ max.: $\pm 0.5\% + 0.05\ \Omega$
4.19	14 (Na)	rapid change of temperature	30 minutes at $-40\text{ }^{\circ}\text{C}$ and 30 minutes at $+200\text{ }^{\circ}\text{C}$; 5 cycles	no visible damage $\Delta R/R$ max.: $\pm 1\% + 0.05\ \Omega$
4.22	Fc	vibration	frequency 10 to 500 Hz ; displacement 0.75 mm or acceleration 10 g ; 3 directions ; total 6 hours ($3 \times 2\text{ hours}$)	no damage $\Delta R/R$ max.: $\pm 0.5\% + 0.05\ \Omega$
4.20	Eb	bump	$4000 \pm 10\text{ bumps}$; 390 m/s^2	no damage $\Delta R/R$ max.: $\pm 0.5\% + 0.05\ \Omega$
4.23		climatic sequence:		
4.23.2	Ba	dry heat	16 hours ; $200\text{ }^{\circ}\text{C}$	
4.23.3	Db	damp heat (accelerated) 1 st cycle	24 hours ; $55\text{ }^{\circ}\text{C}$; 95 to $100\% \text{ RH}$	
4.23.4	Aa	cold	2 hours ; $-40\text{ }^{\circ}\text{C}$	
4.23.5	M	low air pressure	1 hour ; 8.5 kPa ; 15 to $35\text{ }^{\circ}\text{C}$	
4.23.6	Db	damp heat (accelerated) remaining cycles	5 days ; $55\text{ }^{\circ}\text{C}$; 95 to $100\% \text{ RH}$	$\Delta R/R$ max.: $\pm 3\% + 0.05\ \Omega$

Stand-up miniature power resistors

SMW02/03/05
SMF02/03/05

IEC 60115-1 CLAUSE	IEC 60068 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.24.2	3 (Ca)	damp heat (steady state)	56 days; 40 °C; 90 to 95% RH; dissipation $\leq 0.01 P_n$	no visible damage $\Delta R/R$ max.: $\pm 3\% + 0.1 \Omega$
4.8.4.2		temperature coefficient	at 20/-40/20 °C, 20/200/20 °C: SMW : $R < 10 \Omega$ SMW : $R \geq 10 \Omega$ SMF	$TC \leq \pm 600 \times 10^{-6}/K$ $-80 \times 10^{-6} \leq TC$ $TC \leq +140 \times 10^{-6}/K$ $TC \leq +250 \times 10^{-6}/K$
4.13		short time overload	room temperature; dissipation $10 \times P_n$; 5 s O(voltage not more than 1 000 V/25 mm)	$\Delta R/R$ max.: $\pm 2\% + 0.1 \Omega$
4.25.1		endurance (at 70 °C)	1 000 hours loaded with $0.9 P_n$; 1.5 hours on and 0.5 hours off	no visible damage $\Delta R/R$ max.: $\pm 5\% + 0.1 \Omega$
4.23.2	Ba	endurance at upper category temperature	1 000 hours; 200 °C; no load	no visible damage $\Delta R/R$ max.: $\pm 5\% + 0.1 \Omega$