

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 20 to 60 Volts CURRENT 30 Amperes

FEATURES


- * Low switching noise
- * Low forward voltage drop
- * Low thermal resistance
- * High current capability
- * High switching capability
- * High surge capability
- * High reliability

MECHANICAL DATA

- * Case: To-247 molded plastic
- * Epoxy: Device has UL flammability classification 94V-O
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 5.60 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

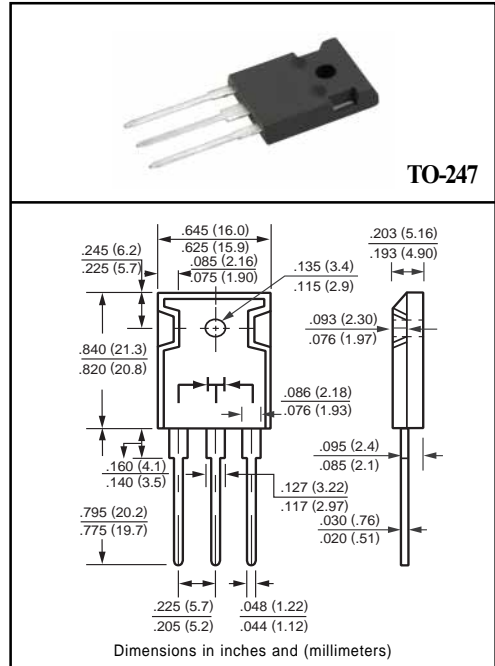

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	SR3020C	SR3030C	SR3035C	SR3040C	SR3045C	SR3050C	SR3060C	UNITS	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	35	40	45	50	60	Volts	
Maximum RMS Voltage	V _{RMS}	14	21	25	28	32	35	42	Volts	
Maximum DC Blocking Voltage	V _{DC}	20	30	35	40	45	50	60	Volts	
Maximum Average Forward Rectified Current at Derating Case Temperature	I _O	30.0							Amps	
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	300							Amps	
Typical Thermal Resistance (Note 1)	R _{θJC}	1.4							°C/W	
Operating Temperature Range	T _J	-65 to + 125					-65 to + 150			°C
Storage Temperature Range	T _{STG}	-65 to + 150							°C	

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	SR3020C	SR3030C	SR3035C	SR3040C	SR3045C	SR3050C	SR3060C	UNITS	
Maximum Instantaneous Forward Voltage at 15.0A DC	V _F	.65							.75	Volts
Maximum Average Reverse Current at Rated DC Blocking Voltage	I _R	@ Tc = 25°C 10					@ Tc = 100°C 100			mAmps
										mAmps

NOTES : 1. Thermal Resistance Junction to Case.
 2. Suffix "A" = Common Anode.

RATING AND CHARACTERISTIC CURVES (SR3020C THRU SR3060C)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

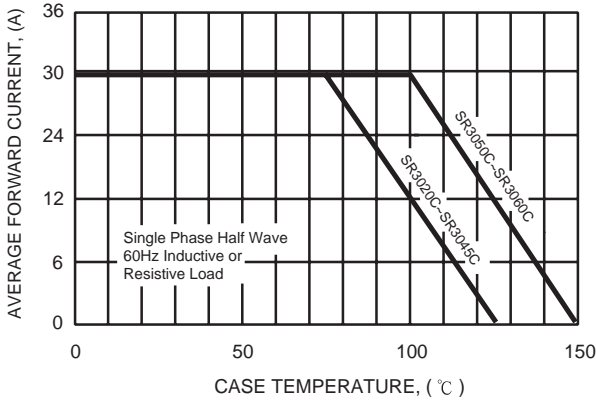


FIG. 2 - TYPICAL REVERSE CHARACTERISTICS

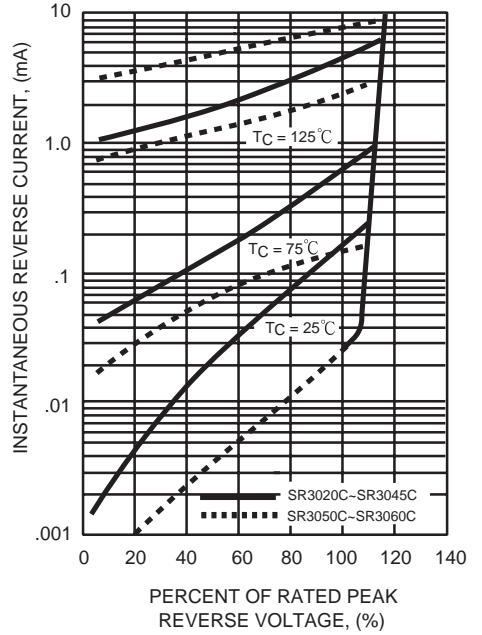


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

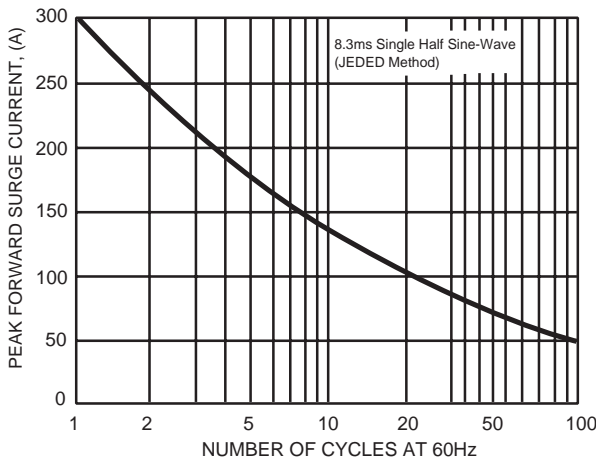


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

